


bright solutions

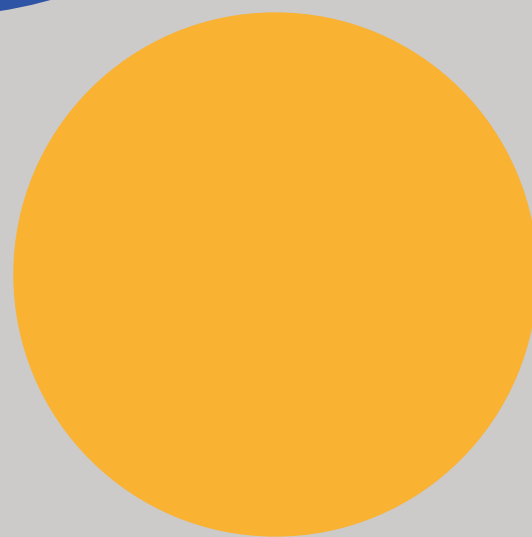

iNTEC[®]
LIGHT

bright solutions

INTEC[®]
LIGHT

**Quando la ricerca trova risposte
alle esigenze, vecchie e nuove.
Quando la tecnologia risolve problemi.
Quando tecnica ed estetica
si fondono armoniosamente.
Lì, nascono le soluzioni più brillanti.**

When research finds solutions
to needs, both old and new.
When technology solves problems.
When technology and aesthetic
appeal harmoniously merge.
That's when the bright solutions are born.



Milano



Napoli

BRIGHT SOLUTIONS

IERI E OGGI, PRESENTI /
YESTERDAY AND TODAY, PRESENT



Un'evoluzione lunga oltre 100 anni

La nostra storia comincia a Napoli agli inizi del '900. È una storia di impegno, di evoluzione, di coraggio. Una storia che corre lungo il filo del tempo intrecciandosi costantemente con quella del vetro.

Generazione dopo generazione, **FAN Europe Lighting** evolve, cambia forma, sviluppa la sua idea di prodotto e di servizio, con l'obiettivo di diventare un punto di riferimento per tutto il settore dell'illuminazione.

La nostra azienda, oggi

Oggi **FAN Europe Lighting** è una grande squadra di persone e di risorse. Alla ricerca dell'eccellenza nella qualità dei prodotti, abbiniamo un ecosistema di servizi e garanzie che abbiamo sviluppato e strutturato a misura di esigenza e di cliente.

La nostra italiana heritage non ci fa dimenticare l'importanza dell'originalità e della cura nel prodotto.

La nostra voglia di crescere ci spinge ad essere sempre al passo con la luce di oggi e di domani, una luce sempre più smart, sempre più green, sempre in evoluzione.

Our history began in Naples in the early 1900s. It's a history of commitment, evolution and courage. A history that follows the thread of time, constantly intertwining with that of glass.

Generation after generation, **FAN Europe Lighting** has evolved, changing shape, developing its concept of products and services to become a benchmark for the entire lighting industry.

Today, **FAN Europe Lighting** is a vast team of people and resources. In addition to pursuing excellence in product quality, we combine an ecosystem of services and guarantees, which we have developed and tailored to our customers' needs.

Our Italian heritage does not allow us to forget the importance of originality and product care. Our desire to grow motivates us to always keep up with the lighting of today and tomorrow, lighting that is always smarter, more eco-friendly and evolving.

**An evolution
spanning more
than 100 years**

**Our
company,
today**



CUSTOM-MADE LIGHTING

UNA SINERGIA DI
RISORSE E GARANZIE /
A SYNERGY OF RESOURCES
AND GUARANTEES

La qualità, al primo posto

Componenti di qualità, controlli multipli, collaudi in fase di realizzazione: per la qualità non scendiamo mai a compromessi. Grazie a un team di esperti riusciamo a garantire la tecnologia più avanzata, finiture ogni anno più curate e nuovi design a prova di tempo!

La gamma più completa di prodotti

Siamo una delle poche aziende al mondo a coprire così tanti settori di destinazione: dall'illuminazione industriale al prodotto decorativo. Siamo "appassionati ricercatori" e ogni anno arricchiamo la gamma con collezioni di tendenza e le innovazioni più efficienti in materia di tecnologia e sostenibilità.

L'evoluzione stilistica e tecnologica dell'illuminazione ha indirizzato la ricerca illuminotecnica verso progetti di illuminazione su misura, in cui i corpi illuminanti sono strumenti al servizio del progetto architettonico.

Questa fase evolutiva ci ha spinto ad ampliare la nostra divisione Project ed Illuminotecnica dedicata ai progetti su misura. La divisione esegue già servizi di progettazione, realizzazione prototipi, test e controllo di produzione per ogni prodotto presente sul nostro catalogo.

Quando i prodotti non incontrano le esigenze del cliente, realizziamo prodotti "customizzati" su misura per le esigenze del progetto e per valorizzare al massimo gli ambienti del disegno illuminotecnico. Grazie a strumenti informatici e software di calcolo fotometrico possiamo fornire per ogni nuovo prodotto i calcoli fotometrici per un adeguato sviluppo progettuale illuminotecnico.



Quality components, multiple checks, testing during the manufacturing process: we never compromise on quality. With our team of experts, we can guarantee cutting-edge technology, new improved finishes every year and new designs that will stand the test of time!

**Quality
comes first**

We are one of the few companies in the world to cover so many target sectors: from industrial lighting to decor products. As "passionate researchers" every year we enrich our range with trend-setting collections and the most efficient innovations in terms of technology and sustainability.

**The most
comprehensive
range of
products**

The stylistic and technological evolution of lighting has steered lighting research towards custom-made lighting projects, in which luminaires are used to support architectural design.

This evolutionary phase encouraged us to expand our Project and Lighting department focusing on custom-made projects. The department already provides design, prototyping, testing and production monitoring services for all the products in our catalogue. When products don't meet the customer's needs, we make bespoke products to meet project requirements and fully enhance lighting design contexts. Using computer tools and photometric calculation software, we can provide photometric calculations for each new product thereby appropriately developing the lighting design project.



CUSTOMER EXPERIENCE

UN'ASSISTENZA SEMPRE ATTIVA / ASSISTANCE ALWAYS AVAILABLE

Massima disponibilità di prodotti

Noi ci siamo, sempre! Con disponibilità, professionalità e un obiettivo chiaro: semplificare la vita dei nostri clienti. È una promessa che facciamo a chi non ci conosce. È una garanzia consolidata per chi lavora con noi da anni! Abbiamo a disposizione una delle più vaste gamme di articoli sul mercato ma riusciamo ad assicurare in ogni momento il 98% di disponibilità. Garantiamo che il restante 2% torni disponibile in 30 giorni!

Spedizioni Veloci e sicure

Abbiamo sviluppato negli anni un sistema logistico efficiente in grado di garantire consegne in 24h per l'Italia e 48 per l'Europa, assicurando la massima cura nel trasporto. Un team multilingua è inoltre al servizio dei clienti per offrire supporto e assistenza.



We are always here for you! With our helpfulness, professionalism and a clear goal: to make life easier for our customers. It's a promise we make to those who don't know us. It's an established guarantee for those who have worked with us for years! We have one of the widest ranges of items on the market, but we can guarantee 98% availability at all times. We guarantee that the remaining 2% will be available in 30 days!

Maximum product availability

Over the years, we have developed an efficient logistics system that guarantees deliveries within 24h in Italy and 48h in Europe, ensuring maximum care during transport. Our multilingual team also provides customers with support and assistance.

Quick and safe shipments



REASON WHY

SOSTENIAMO IL GREEN / WE ARE ECO-FRIENDLY

Abbiamo eliminato la plastica dai nostri packaging. Selezioniamo e prediligiamo materiali provenienti da risorse sostenibili. Ricerchiamo le tecnologie con miglior efficienza energetica abbinati a sistemi smart in grado di ridurre ulteriormente i consumi. Questi e molti altri sono i nostri impegni a sostegno della sostenibilità!

We no longer use plastic in our packaging. We select and prefer materials from sustainable resources. We research the most energy-efficient technologies combined with smart systems that further reduce consumption. All this, and much more, shows our commitment to sustainability!



GUIDA ALLA LETTURA DELLE TABELLE / GUIDE TO READING THE TABLES

Ogni collezione è accompagnata da uno o più simboli per precisare la destinazione d'uso del prodotto

Every collection will be distinguished by a symbol for intended use

Nome e caratteristiche collezione
Collection name and characteristics





Certificazione e normative
Certification and regulations



Caratteristiche prodotto
Product characteristics

LED-JET-W-20HL 803141492411V	150 lm	20W
LED-JET-B-20HL 803141492409D	150 lm	20W
vanti / beam angle: 38° eff: 0,90		

Codice prodotto e codice ean
Product code and EAN code

LED-JET-W-30HL 803141492412Z	3235 lm	30W
LED-JET-B-30HL 803141492409Z	3235 lm	30W
vanti / beam angle: 38° eff: 0,90		

Variante colore
Colour variance
ove esistente / where existing

LED-JET-W-40HL 803141492413A	4300 lm	40W
LED-JET-B-40HL 803141492410Z	4300 lm	40W
vanti / beam angle: 38° eff: 0,90		

Potenza Power
Per i prodotti senza LED integrato,
dati attacco lampadina con
potenza massima certificata /
For the products without built-in
LED max lamp holder power as
required by CE certificate

**Temperatura colore LED
espressa in Kelvin + lumen**
Colour temperature in Kelvin + lumen
ove esistente / where existing

Accessori non inclusi / Not included accessories

LED-JET-MESH60 803141492407Z	for 20W	LED-JET-DIFF60 803141492404Z	for 20W
LED-JET-MESH70 803141492406D	for 30W	LED-JET-DIFF70 803141492403Z	for 30W
LED-JET-MESH80 803141492405D	for 40W	LED-JET-DIFF80 803141492402B	for 40W

Accessori
Accessories
ove esistente / where existing

Fotometria del prodotto / Photometric curve



Fotometria del prodotto
Photometric curve
ove esistente / where existing



indoor use
uso domestico / domestic use



outdoor use
esterno / outdoor use



accommodation areas use
strutture ricettive / accommodation areas use



office use
uffici / office use



commercial areas use
aree commerciali / commercial areas



urban areas use
aree urbane / urban use



industrial areas use
aree industriali / industrial use



bathroom use
ambiente bagno / bathroom use

Sistemi di controllo per i nostri prodotti SMART / Control system easy installation




Smart Intec WIFI



RF 2.4G control system



Alexa e Google Home voice control

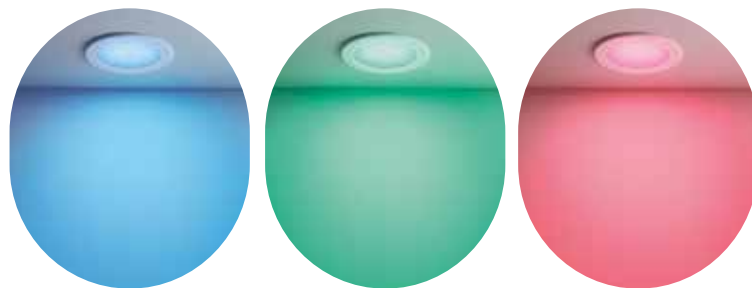

EASY DOMOTICA Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless. I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica. Questa sezione raggruppa prodotti a bassa tensione che è possibile collegare con alimentatori a tensione costante in parallelo e si caratterizzano per la estrema flessibilità e modularità essendo essi compatibili con centraline di controllo in Radio Frequenza 2.4G, Infrarossi, Wifi o Bluetooth. Le centraline a loro volta prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.

EASY DOMOTICA With this technical segment, we intend meet in the best way the growing need to improve the quality of home and working life through the use of lighting devices that are increasingly interconnected with each other through connections that are increasingly simplified by wireless technologies. The lighting devices become an extremely personalized and modular tool that merge, even at different times of the day, with the evolved lighting needs no longer as light source itself but light adapted to the different moods of both professional users, domestic users, playful users. This section groups low voltage products that can be connected with constant voltage power supply in parallel connection system and are characterized by extreme flexibility and modularity as they are compatible with 2.4G Radio Frequency, Infrared, Wifi or Bluetooth control units. The control units can be controlled by wifi, bluetooth devices or can be controlled via a wall pad or remote control.



È possibile controllare da remoto tutti gli apparecchi luminosi, con le APP INTEC e SMART LIFE /
All luminaires can be remotely controlled with INTEC and SMART LIFE APPs.

Scarica l'app Smart Intec su /
Download App Smart Intec on:


























APP INTEC WI-FI Ogni momento della vita quotidiana richiede la giusta luce. Grazie all'illuminazione Smart, creare l'atmosfera ideale per tutti i momenti sarà possibile con i nostri prodotti Wi-fi e Bluetooth. Tramite la **nostra app Smart INTEC** è possibile comandare da remoto tutti gli apparecchi luminosi per accendere o spegnere, cambiare temperatura colore Kelvin della luce e anche impostare scene. Tra i nostri articoli troverai una selezione di prodotti a LED integrato pronti all'installazione ma anche tutti gli accessori necessari per rendere smart qualunque apparecchio domestico e non. Una volta collegata e scaricata l'app INTEC, la creazione delle varie stanze sarà semplice e intuitivo grazie alle istruzioni step by step. Per controllare i nostri prodotti smart è possibile anche utilizzare gli smart speaker e video Amazon e Google. Abilita la skill e controlla i dispositivi semplicemente parlando.

APP INTEC WI-FI Every moment of everyday life require the right light. Thank to the Smart lighting it will be possible to create the ideal atmosphere connecting them and controlling them thorough Wi-fi or Bluetooth connection. **With our APP Smart Intec** it is possible to control from remote all the lighting devices with on-off, kelvin colour temperature changing, light colour and scenes functions. To instore some smart lamps it is necessary just your standard home electric connection, and wifi connection. Once connected the lamp and downloaded the APP Smart Intec it will be very easy to create groups and rooms in very easy process thank to the instructions step by step on the App. The smart lamps can be controlled also with Wifi voice control devices.

SMART INTEC Bluetooth Sig Mesh La rete Bluetooth è stata ben accolta nell'illuminazione industriale, commerciale e domestica, in quanto uno dei sistemi di controllo dell'illuminazione intelligente più semplici e convenienti che svolge un ruolo chiave nel facilitare l'inter-dialogo tra i dispositivi di illuminazione. I nostri articoli Bluetooth Sig Mesh possono essere collegati con i dispositivi intelligenti tramite l'APP Smart Intec e ogni dispositivo di illuminazione può comunicare con un altro numero infinito di dispositivi attraverso la rete mesh entro una distanza di 15m per ogni dispositivo. La rete Mesh Bluetooth può essere controllata da remoto tramite Wifi grazie alla connessione del gateway Bluetooth il quale a sua volta può connettersi ai dispositivi voice control Alexa e Google. Per tutti gli utenti, i prodotti mesh Bluetooth sono anche comodi da usare. Abilitata da una rete di dispositivi su larga scala e in grado di sfruttare il basso consumo energetico, una rete mesh Bluetooth può supportare migliaia di dispositivi che lavorano contemporaneamente. Quindi, non importa se sei a casa o in ufficio, puoi sempre eseguire un gran numero di dispositivi intelligenti connessi allo stesso tempo. Di conseguenza, i prodotti Bluetooth mesh smart forniscono una gamma completa di comodità per vivere e lavorare senza preoccuparsi degli alti costi energetici. Nella casa intelligente, il Bluetooth abbassa la soglia di utilizzo dei dispositivi domestici intelligenti con il suo basso consumo energetico, l'elevata compatibilità e le caratteristiche di alta sicurezza, fornendo un'esperienza domestica più economica, più user-friendly e più intelligente. Senza l'autorizzazione dell'utente, il segnale Bluetooth non sarà in grado di connettersi e tracciare il dispositivo, proteggendo la privacy dell'utente.

SMART INTEC Bluetooth Sig Mesh Bluetooth mesh has been well received across the industrial, commercial and domestic lighting, as one of the easiest and much convenient smart lighting control systems playing a key role in facilitating the inter-dialogue between lighting devices. Our Bluetooth mesh items can be connected with the smart devices through the APP Smart Intec and each lighting device can communicate with other infinite number of devices through the mesh network with all other devices within a distance of 15m. The Bluetooth mesh network can be controlled from remote area through Wifi thank to the connection of Bluetooth gateway that can connect in turn to Alexa and Google voice controls. For individual users, Bluetooth mesh products are also convenient to use. Enabled by a large-scale device network and able to take advantage of low power consumption, a Bluetooth mesh network can support thousands of devices working simultaneously. So, no matter if you are at home or in the office, you can always run a large number of connected smart devices at the same time. As a result, Bluetooth mesh smart products provide a full range of conveniences for living and working without worrying about high energy costs. In the smart home, Bluetooth lowers the threshold of using smart home devices with its low power consumption, high compatibility, and high-security characteristics, providing a lower cost, more user-friendly, and smarter home experience. Without the user's permission, the Bluetooth signal will not be able to connect and track any device, protecting the user's privacy.

CARATTERISTICHE PRODOTTO / PRODUCT FEATURES

 <p>LED integrato SMD / Built-in SMD LED</p>	 <p>LED integrato COB / Built-in COB LED</p>	 <p>Prodotto ad alta efficienza luminosa / High luminous efficiency product</p>	   <p>Prodotto RGB / RGB product</p> <p>Prodotto RGB+UV / RGB+UV product</p> <p>Prodotto RGB+bianco+UV / RGB+white+UV product</p>	 <p>Prodotto RAINBOW / RAINBOW product</p>
 <p>Prodotto CCT (bianco dinamico) / Adjustable white</p>	 <p>Selectable color temperature (2700K 3000K 4000K) Interruttore interno per la personalizzazione dei Kelvin / Internal switch for customization of Kelvin</p>	 <p>Selectable color temperature (3000K 4000K 6000K) Interruttore interno per la personalizzazione dei Kelvin / Internal switch for customization of Kelvin</p>	 <p>Selectable color temperature (3000K 4000K) Interruttore interno per la personalizzazione dei Kelvin / Internal switch for customization of Kelvin</p>	 <p>3 step CCT Regolazione luce calda, naturale, fredda. Memory function tramite interruttore a parete / Warm, natural and cold light control. Memory function by means of a wall switch</p>
 <p>TOUCH DIMMER</p> <p>Touch dimmer Intensità di luce regolabile / Dimmable light intensity</p>	  <p>Dimming Intensità di luce regolabile a taglio di fase / Adjustable light intensity by phase cut-out dimmer</p>	   <p>3 step DIM I prodotti 3 step dimmer permettono di regolare l'intensità luminosa utilizzando l'interruttore di casa / 3 step dimming function: modulation of light intensity by wall switch</p> <p>x1-100% x2-50% x3-10%</p>	 <p>Touch step dimming Interruttore touch 3 luminosità / Step - 3 step brightness touch switch</p>	
  <p>SWITCH TOUCH TOUCH CONTROL</p> <p>Interruttore touch integrato / Built-in touch switch</p>	  <p>Indice resa cromatica / Colour rendering index</p>			


 
Prodotto UGR /
Unified glare rating

UGR è un indice unificato in campo internazionale, sviluppato dalla CIE (commission international de l'Enclaireage), per la valutazione dell'abbagliamento diretto derivante dall'impianto di illuminazione. La norma europea per l'illuminazione dei posti di lavoro in interni **UNI-EN 12464-1** richiede un valore UGR specifico per ogni applicazione, compreso tra **10 e 30: più basso è il valore, minore è l'abbagliamento.**

UGR is an international unified data, developed by CIE (commission international de l'Enclaireage) for the evaluation of the glancing degree of the light sources. The European norme for the lighting of te specialical working place **UNI-EN 12464-1** requires a value UGR for every application, included between **10 and 30: lower is the value, lower is the anti glare ratee.**



Attacco sorgente /
Light source



Misura lampadina consigliata /
Recommended bulb size



Luce emergenza /
Emergency light



Prodotto ad energia solare /
Solar energy product



Calpestabile /
Walkable

max 2000kg



Prodotto indoor e outdoor /
Indoor e outdoor product



Connessione bluetooth /
Bluetooth connection



Gesso verniciabile /
Gypsun paintable



Cemento /
Concrete



Prodotto galleggiante /
Floating product




Prodotto anticorrosione /
Corrosion-free




Incassi: direzione fascio di luce asimmetrica /
Recessed lamps: description of asymmetrical light emission type



Plafoniere: direzione fascio di luce /
Ceiling lamps: description of light emission type



Applique: direzione fascio di luce /
Wall lamps: description of light emission type



Incassi e segnapassi: direzione fascio di luce /
Inground and walk lights: description of light emission type

GRADI DI PROTEZIONE / IP PROTECTION RATE



Classe IP / IP Class

Tutti i prodotti presenti nel catalogo senza specifica grado IP si intendono IP20.

All items in the catalogue without IP rating specific are IP20.



Protezione da corpi solidi Protection against solid bodies

- 0**
Nessuna protezione /
No protection
- 1**
Protetto contro corpi solidi di dimensioni superiori a 50 mm /
Protected against solid bodies larger than 50 mm
- 2**
Protetto contro corpi solidi di dimensioni superiori a 12 mm /
Protected against solid bodies larger than 12 mm
- 3**
Protetto contro corpi solidi di dimensioni superiori a 2,5 mm /
Protected against solid bodies larger than 2,5 mm
- 4**
Protetto contro corpi solidi di dimensioni superiori a 1 mm /
Protected against solid bodies larger than 1 mm
- 5**
Protetto dalla polvere senza deposito dannoso /
Protected against dust no harmful deposit
- 6**
Completamente protetto dalla polvere /
Completely protected against dust

Protezione da liquidi Protection against liquids

- 0**
Nessuna protezione /
No protection
- 1**
Protetto contro le gocce d'acqua a caduta verticale /
Protected against vertically-falling drops of water
- 2**
Protetto contro le gocce d'acqua che cadono fino a 15° dalla verticale /
Protected against drops of water falling at up to 15° from the vertical
- 3**
Protetto contro le gocce d'acqua che cadono fino a 60° dalla verticale /
Protected against drops of water falling at up to 60° from the vertical
- 4**
Protetto contro le gocce d'acqua da tutte le direzioni /
Protected against projections of water from all directions
- 5**
Protetto da getti d'acqua da tutte le direzioni /
Protected against jets of water from all directions
- 6**
Protetto da getti d'acqua con una forte forza d'impatto /
Protected against jets of water of similar force heavy seas
- 7**
Protetto dagli effetti dell' immersione /
Protected against the effects of immersion
- 8**
Protetto contro gli effetti prolungati dell'immersione sotto pressione /
Protected against pro-longed the effects of immersion under pressure



Classe IK / IK Class

Gradi di protezione degli involucri per apparecchiature elettriche contro impatti meccanici esterni.


Degrees of protection for enclosures for electrical equipment against external mechanical impacts.


IK	Energia d'impatto (in Joules) / Impact energy (in Joules)
00	0
01	0,15
02	0,2
03	0,35
04	0,5
05	0,7
06	1
07	2
08	5
09	10
10	20


Classe isolamento elettrico /
Appliance class

Le classi di isolamento elettrico sono il raggruppamento omogeneo definito dall'IEC (International Electrotechnical Commission) delle caratteristiche tecniche applicabili ad un dispositivo elettrico per limitare i rischi di folgorazione conseguenti ad un guasto dello stesso.

The electrical insulation classes are the homogeneous grouping defined by the IEC (International Electrotechnical Commission) of the technical characteristics applicable to an electrical device to limit the risk of electrocution resulting from its failure.

I  Questi apparecchi devono avere il telaio collegato alla terra elettrica da un conduttore di terra separato / These appliance must have their chassis connected to electrical earth by a separate earth conductor

II  Questi apparecchi sono progettati in modo da non richiedere la connessione delle messe a terra / These appliance are designed in such a way that it does not require a safety connection to electrical earth

III  Questi apparecchi sono progettati per essere alimentati da una fonte di alimentazione a bassissima tensione separata di sicurezza / These appliance are designed to be supplied from a separated/safety extra-low voltage power source

Certificazione e normative /
Certification and regulations



Tutti i nostri prodotti sono certificati e conformi alle normative vigenti nella comunità Europea / All our products comply with CE norms and current European standards



EMC - Direttiva Europea sulla compatibilità elettromagnetica / EMC - European electromagnetic compatibility directive



Prodotto dimmerabile /
Product dimmable



Prodotto non dimmerabile /
Product not dimmable



DALI - Digital Addressable Lighting Interface
Sistema di controllo domotico della luce /
DALI - Digital Addressable Lighting Interface
Domotic lighting control system



Dimensione foro quadrato per incasso a soffitto /
Square cut-out size for ceiling recessed lamps



Dimensione foro rotondo per incasso a soffitto /
Round cut-out size for ceiling recessed lamps



Dimensione foro quadrato per incasso a parete /
Square cut-out size for wall recessed lamps



Dimensione foro rotondo per incasso a parete /
Round cut-out size for wall recessed lamps

Indoor:

- 034** SISTEMA BINARI /
TRACK LIGHTS
- 126** INCASSI /
RECESSED LAMPS
- 224** SISTEMI D'ILLUMINAZIONE
MULTIFUNZIONE /
MULTI-FUNCTION
LIGHTING SYSTEM
- 260** APPLIQUE E PLAFONIERE /
WALL LAMP AND CEILING LAMPS
- 286** VENTILATORI /
FANS
- 314** SOTTOPENSILI E BARRE LED /
CABINETS AND LEDBARS
- 336** PROFILI E STRIP LED /
PROFILES AND STRIP LED

Emergency:

- 436** LAMPADE D'EMERGENZA /
EMERGENCY LAMPS

Outdoor:

- 446** APPLIQUE /
WALL LAMPS
- 528** PLAFONIERE /
CEILING LAMPS
- 566** APPLIQUE, SOSPENSIONI
E PALETTI CORRELATI /
WALL, SUSPENSION AND
FLOOR LAMPS COMBINED
- 662** LAMPADE DA TAVOLO
RICARICABILI /
RECHARGEABLE
TABLE LAMPS
- 684** INCASSI E SEGNAPASSI /
INGROUND AND WALK LIGHTS
- 720** SOLARI /
SOLAR LAMPS
- 740** PROIETTORI /
FLOOD LIGHTS
- 770** STRADALI /
STREET LIGHTS

Industrial:

- 786** HIGH BAY & TRI-PROOF

Decorative:

- 798** EASY DOMOTIC 24V /
- 812** LUCI DECORATIVE
TECNICHE DMX /
DMX TECHNICAL
DECORATION LIGHTING

Accessories:

- 840** COMPONENTISTICA /
LIGHTING COMPONENTS

INDICE FOTOGRAFICO / PHOTOGRAPHIC INDEX

Indoor: SISTEMA BINARI / TRACK LIGHTS



SHOT
48

GOAL
49

FANS
50

TEMA
52

LINE
54

SLIDE
56

TUBO
57

CYMBAL
59

DA VINCI
accessories
60-65

BERNINI LINE
70-72



BERNINI FANS
74

BERNINI TUBO
75

BERNINI
accessories
76-79

EXPLORER
84

PLANE
86

JET ALTO
LUMEN
88

DALI
JET
90

JET FOOD
92

OBOE
93

ROCKET
94



ROCKET
applique
95

SQUIB
96

EXPRESS
96

CLOCK
97

MAXWELL
98

HELP TRACK
100

RAIL
accessories
102-107

DALI
RAIL accessories
108-113

TRACK
accessories
114-115

BUSBAR
120-123



BUSBAR
accessories
124-125

Indoor:
INCASSI /
RECESSED LAMPS



APOLLO
128-130



OUTSIDER
132-134



DALI
DELTA INC
136



LYBRA
138



DAMA
139



FIBRA OTTICA
140



STARLIGHT
142



STARLIGHT30
142



ASSO KIT 3
144



EASY
DOMOTICA
ASSO
146



DALI
DOT
148



HYDE
150



SINKRO
152



ELITE
154



DALI
QUARK
156



XANTO
158-160



MACK
162



TRON
164



SLIM CCT
166



FLAP CCT
168



TOTAL
170



PLUS
172



SNIPER
174



GLOW
175



POLARIS
176



ORIONE
177



FUSION
178



BLITZ
180



NEMO
181



EASY
DOMOTICA
RAINBOW
182



ZENIT
183



DALI
QUANTUM
184



HORUS
186



MATRIX
188-190



TUBEX
192



STARRY
194



GHOST
195



VULKAN
196



ENTITY
197



GOBLET
198



SHADOW
199



PHANTOM
200



SPETTRO
201



MINI
202



HIVE
203



SPIRIT
204



SNOW
205



MORGANA
206



SENSO
207



BRICK
208



EVA
209



SKILIFT
210



ARIEL
212



ANIMA
214



STENOS
216



VIPER
218



AYRIS
220



REFLEX
222

Indoor:

SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE /
MULTI-FUNCTION LIGHTING SYSTEM



SHAPE
226

SHAPE
accessories
231

NEXT
232-236

NEXT
accessories
237

SEGMENTO
238-241

METRO
242

PANEL PRO
244

PANEL BK CCT
246

PANEL BK
248

PANEL RGB
250



PANEL IP65
250

PANEL FR
252

PANEL EDG
252

PANEL SM
253

PANEL BIS
254

PANEL
accessories
256

PANEL DJ
258

Indoor:

APPLIQUE E PLAFONIERE /
WALL LAMPS AND CEILING LAMPS



KLIO CCT
262

MIG
264

GENESIS
266

TOWN
268

DOMO
270

BLASTER
272

CRUISE
273

YACHT
274

NOIR
275

LANCER
276



SACS
278

RIVA
279

AQA
280

WALLY
281

DIVA
282

F1
284


ROBY
284

Q1
285

Indoor:
VENTILATORI /
FANS



Indoor:
SOTTOPENSILI E BARRE LED /
CABINETS AND LEDBARS

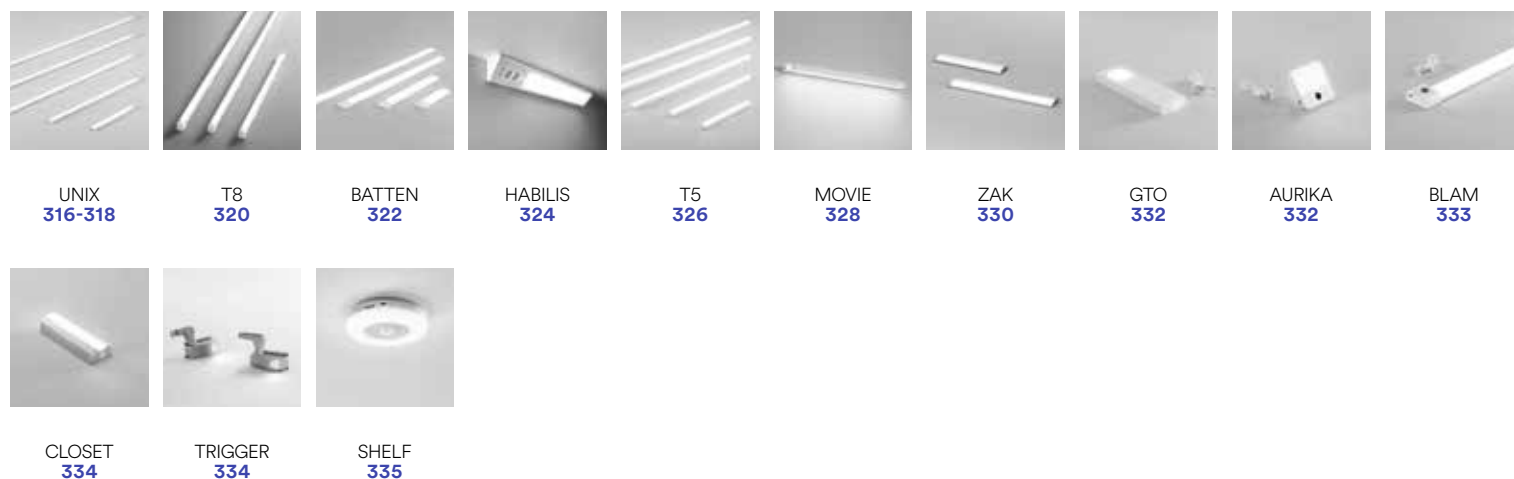

Indoor:

**PROFILI E STRIP LED /
PROFILES AND STRIP LED**



GORIZIA PROFILE 340 BEND PROFILE 342 EDGE PROFILE 344 RIDGE PROFILE 346 ANGLE PROFILE 347 BERLINO PROFILE 348 ROMA PROFILE 350 MICRO PROFILE 352 INCRO PROFILE 353 LOOP PROFILE 356



LINEA PROFILE 358 MILANO PROFILE 360 ULTRA PROFILE 362 CAMELOT PROFILE 364 TUBE PROFILE 366 NEWYORK PROFILE 368 DORIK PROFILE 370 IONIK PROFILE 371 STEPWAY PROFILE 372 DRIVEWAY PROFILE 374



GASH PROFILE 378 TRIM PROFILE 380 MOP PROFILE 381 VEIL PROFILE 382 WING PROFILE 383 DUAL PROFILE 384 INVISILINE PROFILE 388 PROFY BIS PROFILE 390 PROFY MONO PROFILE 390 PROFY GIMEL PROFILE 392



PROFY VELA PROFILE 392 PIANO PROFILE 395 PROFILE accessories 396 EASY DOMOTICA STRIP24V COB DIGITAL 398 EASY DOMOTICA STRIP24V COB RGB DIGITAL 399 EASY DOMOTICA STRIP24V 2835 IP67 120 400 EASY DOMOTICA STRIP24V 2835 5W 401 EASY DOMOTICA STRIP24V R20 2835 120 402 EASY DOMOTICA STRIP24V R20 COB 480 403 EASY DOMOTICA STRIP24V 2835 HL 128 404



EASY DOMOTICA STRIP24V FOOD 405 EASY DOMOTICA STRIP24V COB 406 EASY DOMOTICA STRIP24V COB IP67 407 EASY DOMOTICA STRIP24V 2835 3D 408 EASY DOMOTICA STRIP24V SLIM 120 409 EASY DOMOTICA STRIP24V 2835 60 410 EASY DOMOTICA STRIP24V 2835 60 IP67 411 EASY DOMOTICA STRIP24V 2835 120 412 EASY DOMOTICA STRIP24V 2835 120 IP68 413 EASY DOMOTICA STRIP24V 2835 CCT 414



EASY DOMOTICA STRIP24V 2835 240 415 EASY DOMOTICA STRIP24V 5050 60 416 EASY DOMOTICA STRIP24V 5050 60 IP67 417 EASY DOMOTICA STRIP24V 5050 RGB 418 EASY DOMOTICA STRIP24V 5050 RGB IP67 419 EASY DOMOTICA STRIP24V 5050 RGBW 420 EASY DOMOTICA STRIP24V 5050 RGBW IP68 421 STRIP230V SMD 422 STRIP230V COB 423 EASY DOMOTICA STRIP24V 5050 3D RGBW 424



EASY DOMOTICA STRIP 24V 5050 RGB CCT 425 EASY DOMOTICA STRIP24V 3838 168 RGB 426 WI-FI STRIP24V 5050 RGBW INT 428 WI-FI STRIP24V 2835 INT 429 EASY DOMOTICA INSIGN 430 STRIP SURROUND 431 EASY DOMOTICA FLEX24V 10X10 432 EASY DOMOTICA FLEX24V 6X6 433 EASY DOMOTICA FLEX24V 6X13 434

Indoor: LAMPADRE D'EMERGENZA / EMERGENCY LAMPS



HUBLLOT HELP
438

HELP INC
440

HELP TRACK
441


HELP EXIT
442

HELP 511
443

HELP 503
444

BOLT HELP
445

Outdoor: APPLIQUE / WALL LAMPS

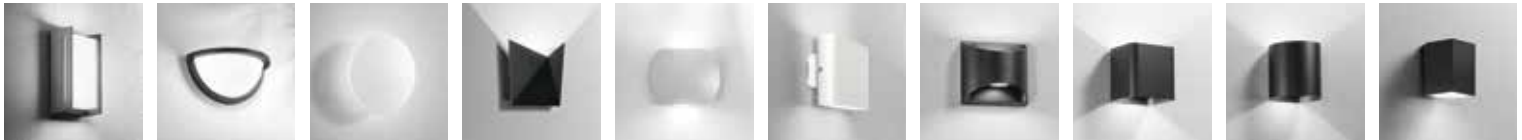

COMPACT
448

DETROIT
449

ZODIAC
450

STEALTH
452

MIURA
454

GAMMA
455

VEYRON
456

BIOME
458

GOLF
460

POLO
462



RAY
464

TWIN
466-468

DESERT
470

DUKROT
472

WEISS
474

BORDER
476

LUXON
478

GRIS
480

AGERA
482

BOXTER
484



KLEIN
486

BEETLE
488

RIBBON
490

LASER
492

ALFA
494-496

DELTA
498

PARKER
500-502

PORTLAND
504

OAKLAND
505

JUMP
506



ONE
508

QUBO
510

TUCSON
512

HURACAN
514

SEATTLE
515

AUSTIN
516

BOSTON
518

ATLANTA
519

DENVER
519

MONDRIAN
520



GAETA
521


GRUBB
522

AKRON
523


PEG
524

TOGO
526

Outdoor:
PLAFONIERE /
CEILING LAMPS

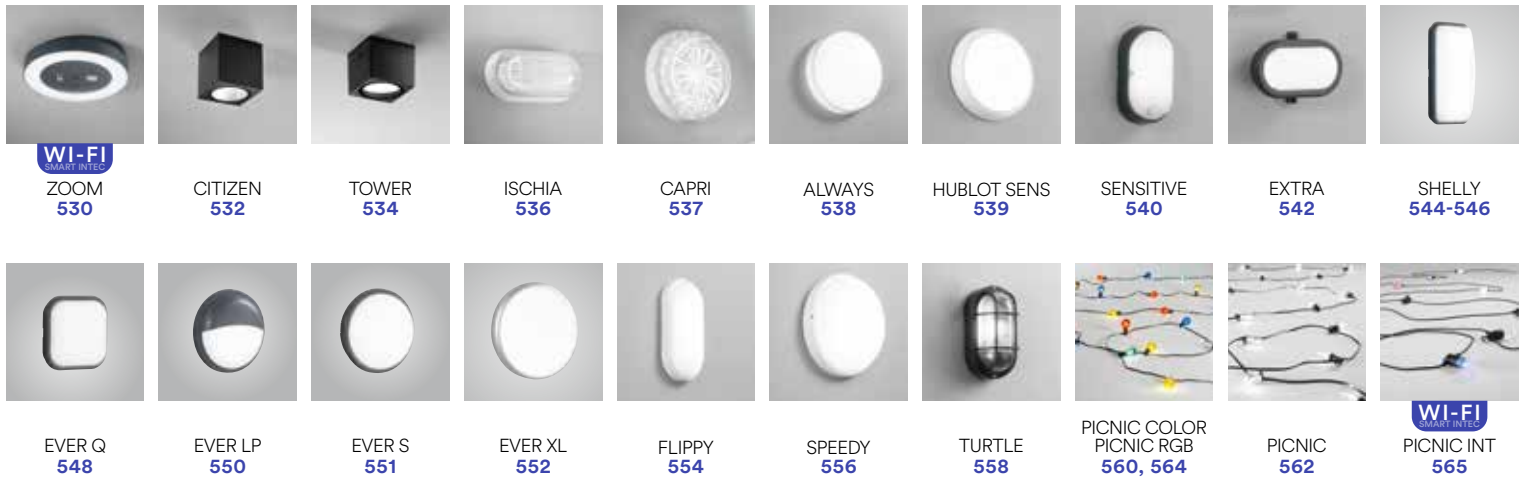

Outdoor:
APPLIQUE SOSPENSIONI E PALETTI CORRELATI /
WALL SUSPENSION AND FLOOR LAMPS COMBINED

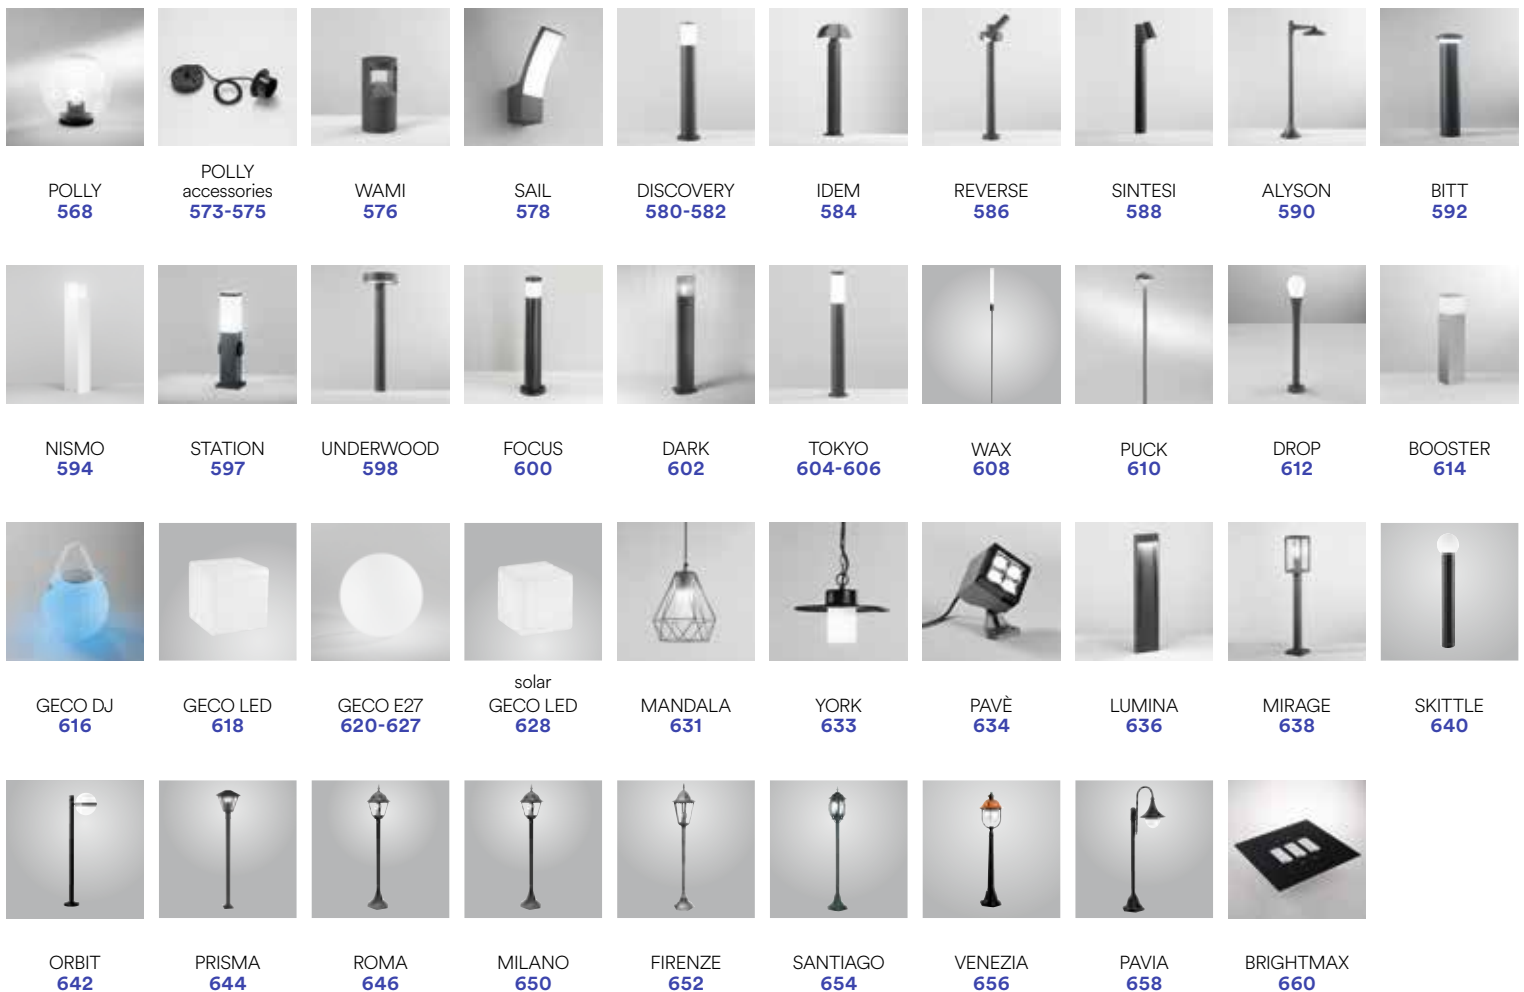

Outdoor:LAMPADRE DA TAVOLO RICARICABILI /
RECHARGEABLE TABLE LAMPPARTY
664LIBERTY
667SMALL DRINK
668DRINK
670JAMMIN
672BRIO
674MYKES
676COCKTAIL
678CLIMAX
680OBERON
683**Outdoor:**INCASSI E SEGNAPASSI /
INGROUND AND WALK LIGHTSBARRET
686SUBWAY
687RIDER
688-690EASY
DOMOTICA
IMPACT
691EASY
DOMOTICA
STEP
692WALK
694-696HUMMER
698DRIVE
700ELMO
702GROUND
704ONYX
706STRATOS
708SLAB
710BREEN
712SMILE
714BOLT
716STEPLIGHT
718SHELBY
719**Outdoor:**SOLARI /
SOLAR LAMPSKYOTO
722ENYA
723TED
724ALBERT
725COSMO
726ELIOS
728EOS
729SKYP
730OPEN
731ARGO
733SHIVA
734ULYSSE
735GLASER
736LUXOR
739

Outdoor:
PROIETTORI /
FLOOD LIGHTS



WI-FI
SMART-INTC
VYSOR
742



BANNER
744



SAT
746




AXEL
748-750



AXEL SENSOR
752



AXEL PORTABLE
753



BULL
754



KNOX
756



ATHOS
758



TAURUS
760



FLOOD LIGHTS
accessories
762



GIOVE
764



MASTER
766



ENERGY
768

Outdoor:
STRADALI /
STREET LIGHTS



AUREUS
772



RADIUS
774



FEBO
776



IPERION
778



STREETWAY
780



HIGHWAY
782



POLIS
784

Outdoor:
HIGH BAY & TRI-PROOF



AVATAR
788



ATLANTIC
790



NAUTILUS
792




ARTIC
794




OCEAN
796


Decorative:
EASY DOMOTIC 24V

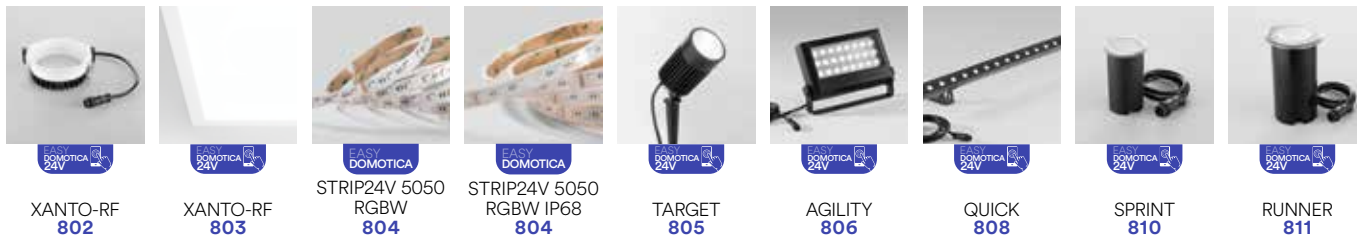

Decorative:
LUCI DECORATIVE TECNICHE DMX /
DMX TECHNICAL DECORATION LIGHTING

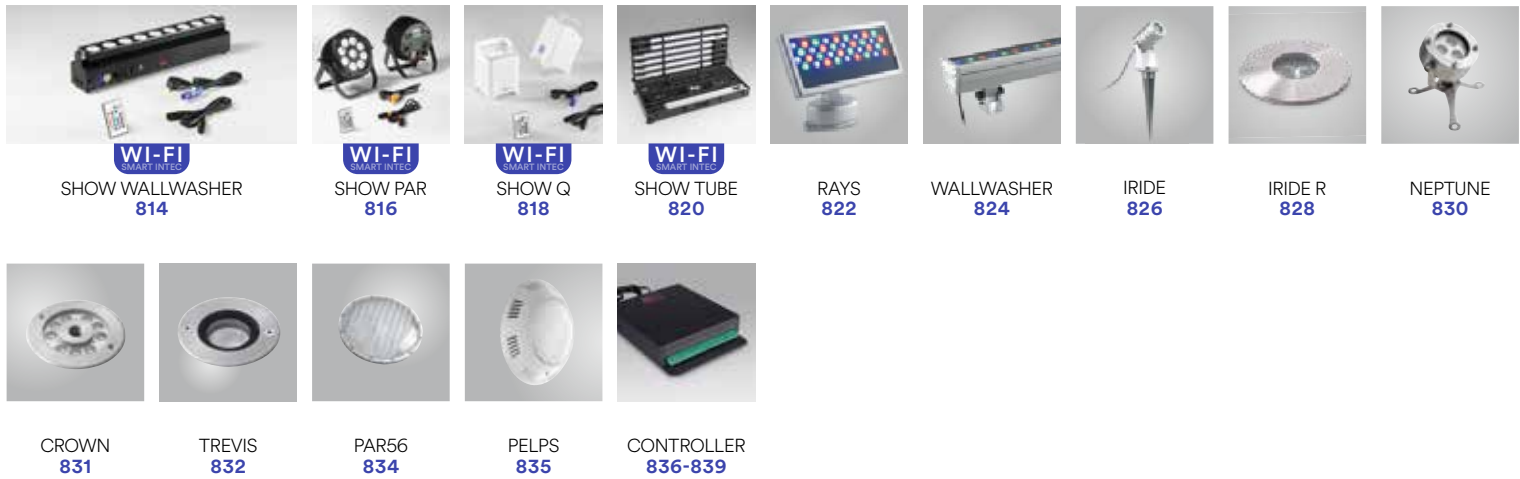

Outdoor:
COMPONENTISTICA /
LIGHTING COMPONENTS

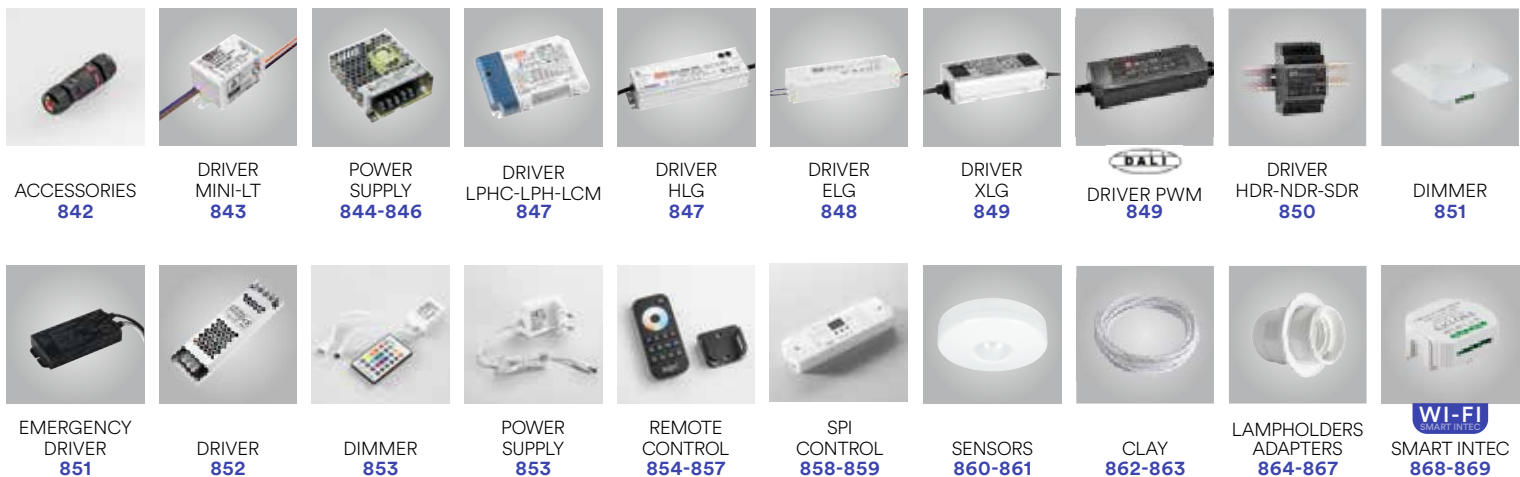

INDICE ALFABETICO / ALPHABETICAL INDEX

articolo / article

pagina / page

AGERA	482
AGILITY Easy Domotica 24V	806
AKRON	523
ALBATROS	292
ALBERT	725
ALFA	494-497
ALISEO	305
ALWAYS	538
ALYSON	590
ANGLE PROFILE	347
ANIMA	214
APOLLO	128-131
AQA	280
ARGO	733
ARIEL	212
ARTIC	794
ASSO	146
ASSO KIT 3	144
ATHOS	758
ATLANTA	519
ATLANTIC	790
AUREUS	772
AURIKA	332
AUSTER	298
AUSTIN	516
AVATAR	788
AXEL	748-751
AXEL PORTABLE	753
AXEL SENSOR	752
AYRIS	220
BANNER	744
BARRET	686
BATTEN	322
BEEBLE	488
BEND PROFILE	342
BERLINO PROFILE	348
BERNINI FANS	74

articolo / article

pagina / page

BERNINI LINE	70-73
BERNINI PROJECT 48V	66-69
BERNINI PROJECT 48V Accessories	76-79
BERNINI TUBO	75
BIOME	458
BITT	592
BLAM	333
BLASTER	272
BLITZ	180
BLYTH	290
BOLT	716
BOLT HELP	445
BOOSTER	614
BORDER	476
BOREA	303
BOSTON	518
BOXTER	484
BREEN	712
BRICK	208
BRIGHTMAX	660
BRIO	674
BULL	754
BUSBAR	120-123
BUSBAR Accessories	124
BUSBAR Trunking System	116-119
CAMELOT PROFILE	364
CAPRI	537
CITIZEN	532
CLAY	862
CLIMAX	680
CLOCK	97
CLOSET	334
COCKTAIL	678
COMPACT	448
CONTROLLER	836-839

articolo / article

pagina / page

COSMO	726
CROWN	831
CRUISE	273
CYMBAL	59
DA VINCI PROJECT 48V	36-47
DA VINCI PROJECT 48V Accessories	60-65
DAMA	139
DARK	602
DELTA	498
DELTA INC	136
DENVER	519
DESERT	470
DETROIT	449
DIMMER	851, 853
DISCOVERY	580-583
DIVA	282
DOMO	270
DORIK PROFILE	370
DOT	148
DRINK	670
DRIVE	700
DRIVER	843 847-852
DRIVEWAY PROFILE	374
DROP	612
DUAL PROFILE	384
DUKROT	472
EDGE PROFILE	344
ELIOS	728
ELITE	154
ELMO	702
ENERGY	768
ENTITY	197
ENYA	723
EOS	729
ESPERO	313
ETESIA	310

articolo / article

pagina / page

EVA	209
EVER	548-553
EXPLORER	84
EXPRESS	96
EXTRA	542
F1	284
FANS	50
FEBO	776
FIBRA OTTICA	140
FIRENZE	652
FLAP CCT	168
FLEX24V 10X10	432
FLEX24V 6X13	434
FLEX24V 6X6	433
FLIPPY	554
FLOOD LIGHTS Accessories	762
FOCUS	600
FOEHN	305
FUSION	178
GAETA	521
GAMMA	455
GASH PROFILE	378
GECO DJ	616
GECO E27	620-627
GECO LED	618
GECO LED SOLAR	629
GENESIS	266
GHOST	195
GIOVE	764
GLASER	736
GLOW	175
GOAL	49
GOBLET	198
GOLF	460
GORIZIA PROFILE	340
GRECALE	306
GRIS	480

articolo / article

pagina / page

GROUND	704
GRUBB	522
GTO	332
HABILIS	324
HADLEY	296
HELP 503	444
HELP 511	443
HELP EXIT	442
HELP INC	440
HELP TRACK	100
HELP TRACK	441
HERON	288
HIGHWAY	782
HIVE	203
HORUS	186
HUBLOT HELP	438
HUBLOT SENS	539
HUMMER	698
HURACAN	514
HYDE	150
IDEM	584
IMPACT	691
INCRO PROFILE	353
INSIGN	430
INVISILINE PROFILE	388
IONIK PROFILE	371
IPERION	778
IRIDE	826-829
ISCHIA	536
JAMMIN	672
JET	90
JET ALTO LUMEN	88
JET FOOD	92
JUMP	506
KLEIN	486
KLIO CCT	262
KNOX	756
KYOTO	722

articolo / article

pagina / page

LAMP HOLDERS	864-867
LANCER	276
LASER	492
LEVANTE	309
LIBERTY	667
LINE	54
LINEA PROFILE	358
LOOP PROFILE	356
LUMINA	636
LUXON	478
LUXOR	739
LYBRA	138
MACK	162
MAGNUS	294
MANDALA	631
MASTER	766
MATRIX	188-191
MAXWELL	98
METRO	242
MICRO PROFILE	352
MIG	264
MILANO	650
MILANO PROFILE	360
MINI	202
MIRAGE	638
MIURA	454
MONDRIAN	520
MOP PROFILE	381
MORGANA	206
MOVIE	328
MYKES	676
NASHI	313
NAUTILUS	792
NEMO	181
NEPTUNE	830
NEWYORK PROFILE	368
NEXT	232-237
NISMO	594

articolo / article

pagina / page

NOIR	275
OAKLAND	505
OBERON	683
OBOE	93
OCEAN	796
ONE	508
ONYX	706
OPEN	731
ORBIT	642
ORIONE	177
OUTSIDER	132-135
PANEL Accessories	256
PANEL Easy Domotica 24V	803
PANEL BIS	254
PANEL BK	248
PANEL BK CCT	246
PANEL FR / EDG	252
PANEL IP65	250
PANEL PRO	244
PANEL RGB	250
PANEL SM	253
PANEL-DJ	258
PAR56	834
PARKER	500-503
PARTY	664
PAVÈ	634
PAVIA	658
PEG	524
PELPS	835
PHANTOM	200
PIANO PROFILE	395
PICNIC	562
PICNIC COLOR	560
PICNIC INT	565
PICNIC RGB	564
PLANE	86

articolo / article

pagina / page

PLUS	172
POLARIS	176
POLIS	784
POLLY	568-575
POLO	462
PONENTE	311
PORTLAND	504
POWER SUPPLY	844-846 853
PRISMA	644
PROFILE Accessories	396-397
PROFY BIS PROFILE	390
PROFY GIMEL PROFILE	392
PROFY MONO PROFILE	390
PROFY VELA PROFILE	392
PUCK	610
Q1	285
QUANTUM	184
QUARK	156
QUBO	510
QUICK Easy Domotica 24V	808
RADIUS	774
RAIL Accessories	102-107
RAIL DALI Accessories	108-113
RAINBOW	182
RAY	464
RAYS	822
REFLEX	222
REMOTE CONTROL	854-857
REVERSE	586
RIBBON	490
RIDER	688-690
RIDGE PROFILE	346
RIVA	279

articolo / article

pagina / page

ROBY	284
ROCKET	94-95
ROMA	646
ROMA PROFILE	350
RUNNER Easy Domotica 24V	811
SACS	278
SAIL	578
SANTIAGO	654
SAT	746
SCIROCCO	309
SEATTLE	515
SEGMENTO	238-241
SENSITIVE	540
SENSO	207
SENSOR	860-861
SHADOW	199
SHAPE	226-231
SHELBY	719
SHELF	335
SHELLY	544-547
SHIVA	734
SHOT	48
SHOW PAR	816
SHOW Q	818
SHOW TUBE	820
SHOW WALLWASHER	814
SINKRO	152
SINTESI	588
SKILIFT	210
SKITTLE	640
SKYP	730
SKYRON	303
SLAB	710
SLIDE	56
SLIM CCT	166
SMALL DRINK	669
SMART INTEC	868

articolo / article

pagina / page

SMILE	714
SNIPER	174
SNOW	205
SPEEDY	556
SPETTRO	201
SPI CONTROLLER	858-859
SPIRIT	204
SPRINT Easy Domotica 24V	810
SQUIB	96
STARLIGHT	142
STARLIGHT30	142
STARRY	194
STATION	597
STEALTH	452
STENOS	216
STEP	692
STEPLIGHT	718
STEPWAY PROFILE	372
STORM	300
STRATOS	708
STREETWAY	780
STRIP Easy Domotica 24V	804
STRIP SURROUND	431
STRIP230V COB	423
STRIP230V SMD	422
STRIP24V 2835 120	412
STRIP24V 2835 120 IP68	413
STRIP24V 2835 240	415
STRIP24V 2835 3D	408
STRIP24V 2835 5W	401
STRIP24V 2835 60	410
STRIP24V 2835 60 IP67	411
STRIP24V 2835 CCT	414
STRIP24V 2835 HL 128	404
STRIP24V 2835 INT	429
STRIP24V 2835 IP67 120	400

articolo / article

pagina / page


STRIP24V 3838 168 RGB	426
STRIP24V 5050 3D RGBW	424
STRIP24V 5050 60	416
STRIP24V 5050 60 IP67	417
STRIP24V 5050 RGB	418
STRIP24V 5050 RGB CCT	425
STRIP24V 5050 RGB IP67	419
STRIP24V 5050 RGBW	420
STRIP24V 5050 RGBW INT	428
STRIP24V 5050 RGBW IP68	421
STRIP24V COB	406
STRIP24V COB DIGITAL	398
STRIP24V COB IP67	407
STRIP24V COB RGB DIGITAL	399
STRIP24V FOOD	405
STRIP24V R20 2835 120	402
STRIP24V R20 COB 480	403
STRIP24V SLIM 120	409
SUBWAY	687
T5	326
T8	320
TARGET Easy Domotica 24V	805
TAURUS	760
TED	724
TEMA	52
TOGO	526
TOKYO	604-607
TOTAL	170
TOWER	534
TOWN	268
TRACK Accessories	114
TRACK RAIL Three-phase	80-83
TREVIS	832
TRIGGER	334
TRIM PROFILE	380

articolo / article

pagina / page

TRON	164
TUBE PROFILE	366
TUBEX	192
TUBO	57
TUCSON	512
TURTLE	558
TWIN	466-469
ULTRA PROFILE	362
ULYSSE	735
UNDERWOOD	598
UNIX	316-319
VEIL PROFILE	382
VENEZIA	656
VEYRON	456
VIPER	218
VULKAN	196
VYSOR	742
WALK	694-697
WALLWASHER	824
WALLY	281
WAMI	576
WAX	608
WEISS	474
WING PROFILE	383
XANTO	158-161
XANTO-RF Easy Domotica 24V	802
YACHT	274
YORK	633
ZAK	330
ZENIT	183
ZODIAC	450
ZOOM	530

INDOOR

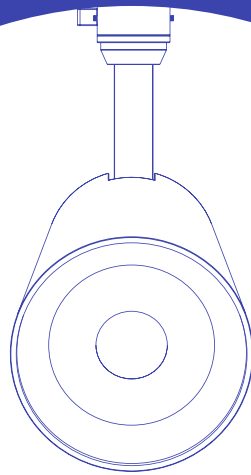

SISTEMA BINARI
TRACK LIGHTS

DA VINCI PROJECT **48V**





DA VINCI PROJECT 48V

INTEC fa un salto nel futuro con il sistema Da Vinci, sistema progettato per integrarsi totalmente con l'architettura degli ambienti. Esso può essere fissato al soffitto o alle pareti, inserito nella muratura ad incasso a filo oppure nella versione a sospensione con luce bi-emissione.

Frutto della ricerca tecnologica più avanzata, il sistema consente di creare luce che scaturisce direttamente dalle pareti o dal soffitto, e gioca con gli spazi abitativi tracciando segni luminosi che variano a seconda della posizione del corpo illuminante, posizione che può essere modificata con la massima versatilità in ogni momento grazie al semplice inserimento dei corpi illuminanti all'interno del binario tramite il fluido sistema di innesti a sfere volventi.


INTEC leap forward into the future with the Da Vinci system, system designed to fully integrate with the architecture environments. It can be fixed to the ceiling or to the walls, inserted in the flush-mounted masonry or mounted in suspension version with single or bi-emission light.

Fruit of most advanced technological research, the system allows you to create light that springs directly from the walls or ceiling, and plays with living spaces by drawing luminous signs that vary according to the position of the luminaire, position which can be modified with maximum versatility at any time thanks to the simple insertion of the led luminous bodies inside the track by means of the fluid ball bearings.

A

RECESSED TRACK TRIMLESS


Sistema di montaggio a incasso a filo / Recess mount system trimless



B

RECESSED TRACK


Sistema di montaggio a incasso con cornice / Recess mount system with external trim



C

SURFACE MOUNTED


Sistema di montaggio a plafoniera o a sospensione a vista / Ceiling or suspension mounting system



D

PENDANT

Sistema di montaggio a sospensione bi-emissione / Bi-emission suspension mounting system





DA VINCI PROJECT 48V



In base allo spazio da illuminare, è possibile aggiungere, rimuovere o orientare gli apparecchi, quando e dove necessario grazie ad un semplice click. Il sistema Da Vinci a sfere volventi è basato sul sistema plug & play, non ha quindi bisogno di complessi interventi tecnici. Ogni corpo illuminante Da Vinci ha solo bisogno di essere posizionato, inserito ed acceso.

Depending on the space to be illuminated, it is possible to add, remove or orient the appliances when and where necessary thanks to a simple click. The Da Vinci rolling ball system is based on the system plug & play, therefore it does not need complex interventions of technicians. Every Da Vinci luminaire just needs to be positioned, inserted and switched on.

All'interno del binario Da Vinci si può operare con inserimento di una vasta gamma di moduli di illuminazione decorativa sia con fari a spot orientabili, lampade sospese, che con lampade a led lineari fisse o movibili.

Inside the track Da Vinci can be inserted a wide range of decorative lighting modules with headlights, adjustable spots, suspended lamps, and with led linear lamps fixed or movable.

A
LINE

Lampada lineare orientabile a led /
Led adjustable linear lamp

B
SLIDE

Lampada lineare orientabile a led /
Led adjustable linear lamp

C
GOAL

Faro luce spot orientabile /
Spot orientable track light

D
SHOT

Faro luce spot orientabile /
Spot orientable track light

E
FANS

Faro luce spot orientabile /
Spot orientable track light

F
TEMA

Faro luce spot orientabile /
Spot orientable track light

G
CYMBAL

Lampada sospensione led /
Suspension led light

H
TUBO

Lampada sospensione led /
Suspension led light



Schema di montaggio sistema binari.
Assembling technical sheet track rail system.



DA VINCI PROJECT 48V


Il binario Da Vinci è un binario completamente elettrificato a bassa tensione e si completa con elementi luminosi a led inseribili semplicemente con un click, grazie all'incastro a sfere volventi, lungo tutto il percorso.


La diversificata gamma di corpi illuminanti Da Vinci, e la ampia scelta di forme, angoli e connessioni permettono la realizzazione di disegni illuminotecnici che esprimono la massima dinamicità e poliedricità delle personalizzazioni.

Da Vinci track is a fully electrified low voltage track system and it is completed with led light elements which can be inserted simply with a click, thanks to the joint a rolling spheres, all along the path.


The diversified range of lighting fixtures Da Vinci, and the wide choice of shapes, angles and connections allow the creation of lighting designs which express the maximum dynamism and versatility of the customizations.

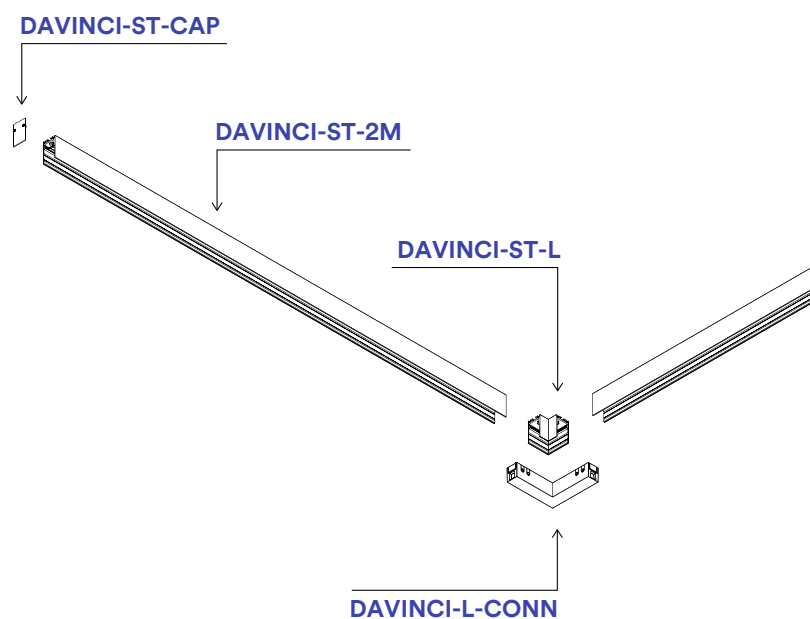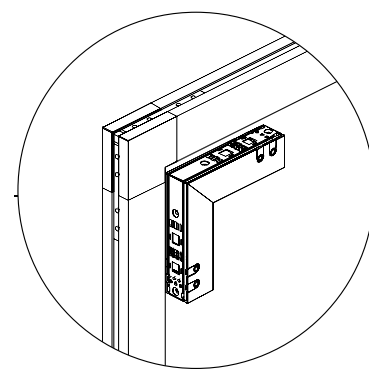

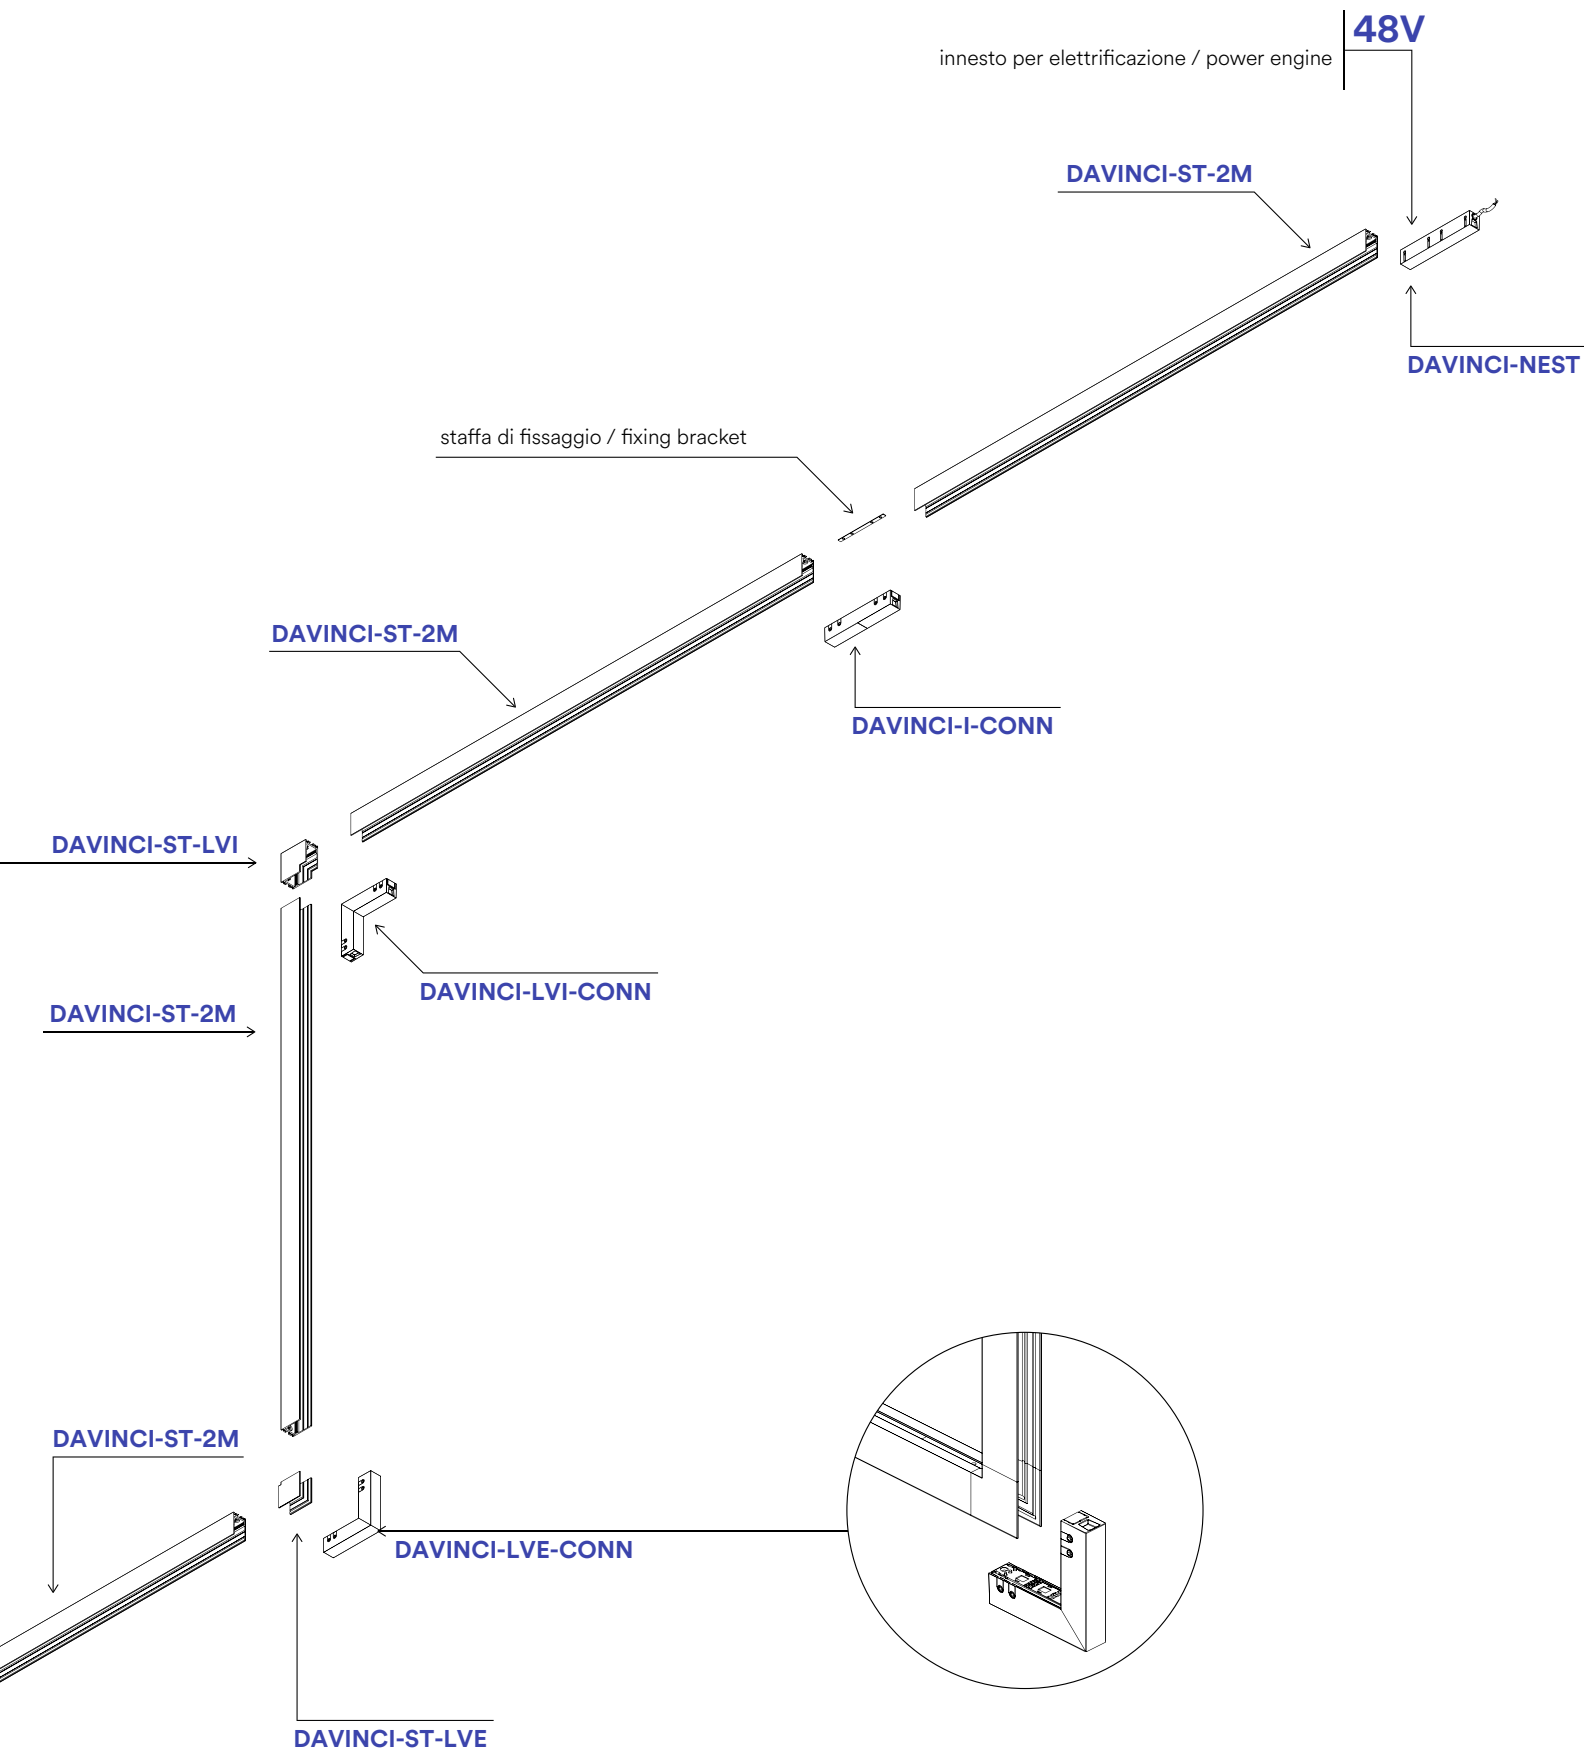





on photo:
TUBO / FANS
Recess mount system trimless



on photo:
CYMBAL / TEMA
Recess mount system with external trim

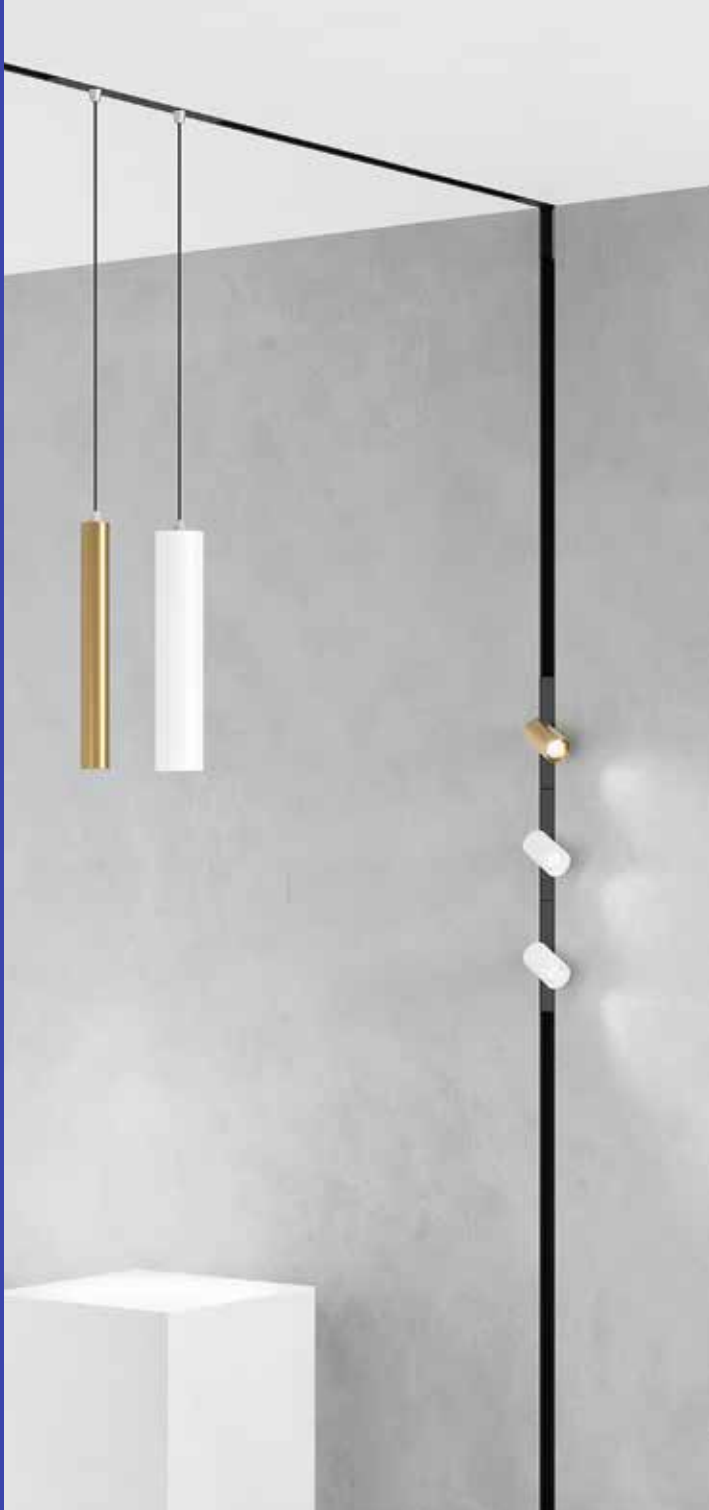




on photo:
CYMBAL / GOAL
Ceiling or suspension mounting system






on photo:
LINE UGR / LINE / TEMA
Ceiling or suspension mounting system






on photo:
SHOT / LINE URG / LINE / SLIDE
Biemission suspension mounting system

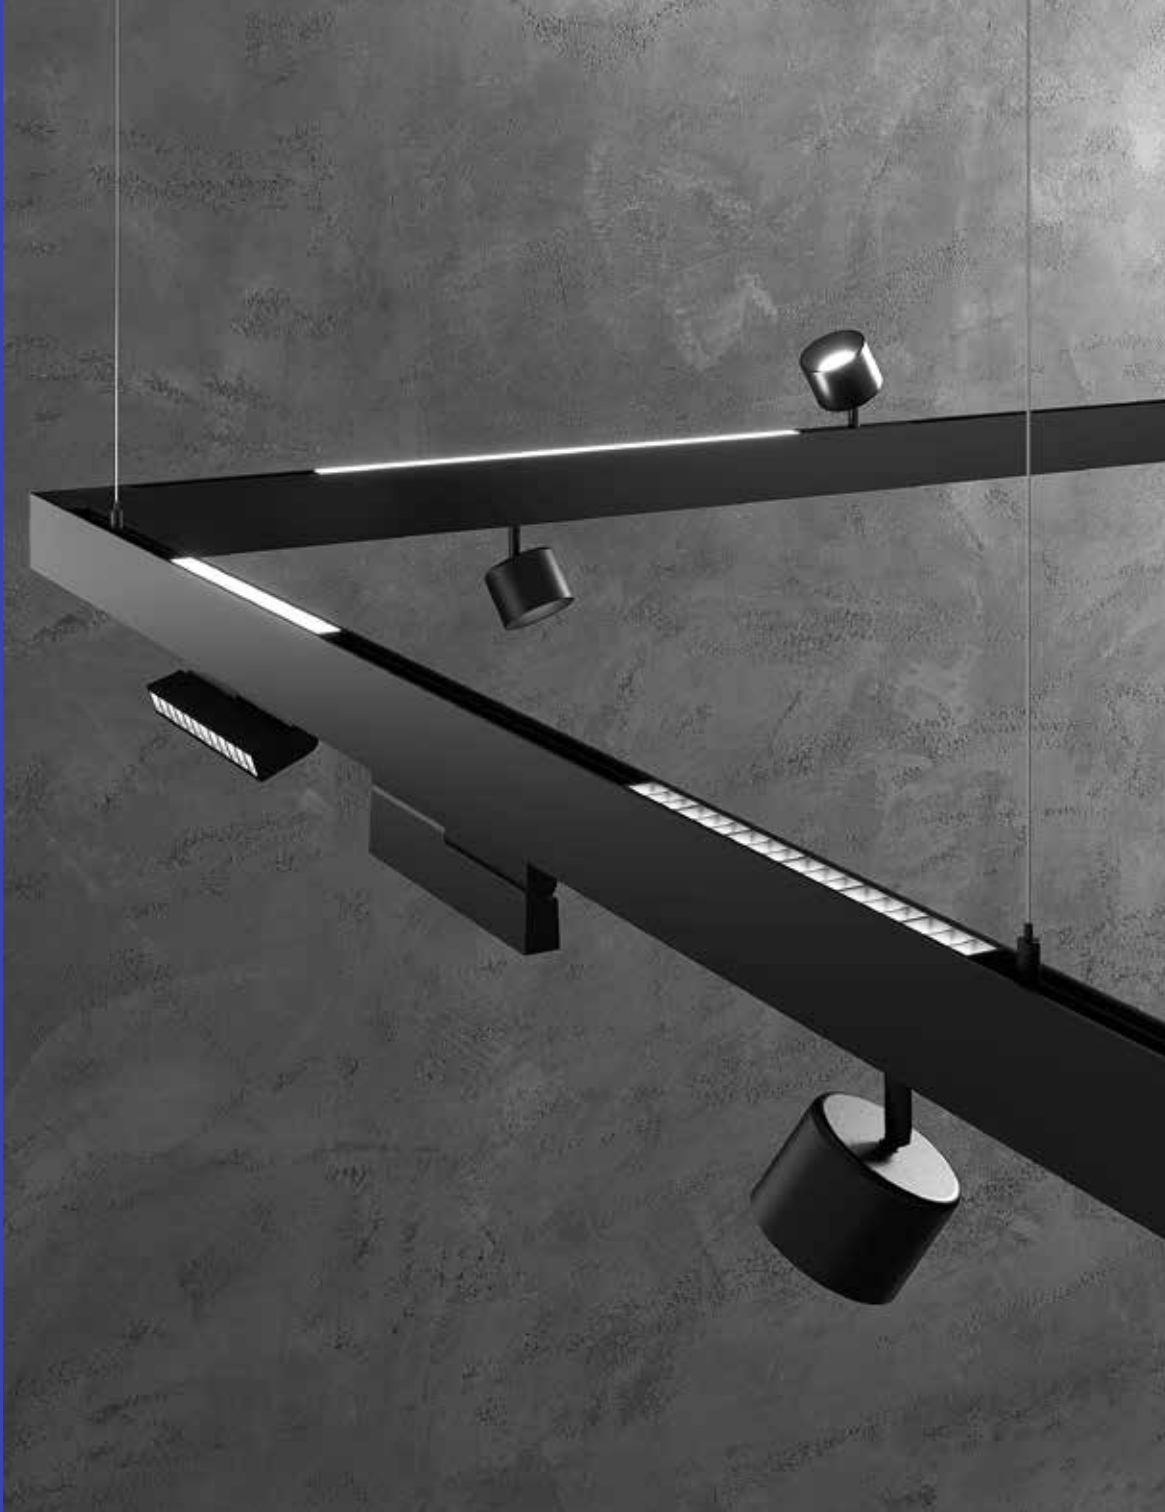

In.tec light **SISTEMA BINARI / TRACK LIGHTS**

In.tec light

Da Vinci Project 48V
Sfere volenti / Rolling spheres

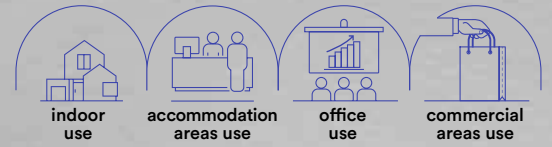

SHOT

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.

Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.



Materiale
alluminio

Colore
nero goffrato



Temperatura colore
3000K / 4000K



Driver
DC 48V
non incluso

Material
aluminum


Colour
embossed black



Colour temperature
3000K / 4000K



Driver
DC 48V
not included



DAVINCI-SHOT-B-10C

8031414893911

lumen

colour temp.



980 lm

colour



DAVINCI-SHOT-B-10M

8031414893928

lumen

980 lm


980 lm

watt


10W

beam angle

24°



DAVINCI-SHOT-B




Da Vinci Project 48V
Sfere volventi / Rolling spheres

GOAL

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.

Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.

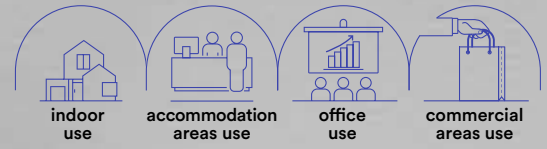

Materiale
alluminio

Colore
nero gofrato



Temperatura colore
3000K / 4000K



Driver
DC 48V
non incluso

Material
aluminum


Colour
embossed black



Colour temperature
3000K / 4000K



Driver
DC 48V
not included



DAVINCI-GOAL-B-10C

8031414893935

lumen

colour temp. | colour

980 lm |

DAVINCI-GOAL-B-10M

8031414893942

lumen



980 lm |

watt

10W

beam angle

24°




DAVINCI-GOAL-B



In.tec light SIS B1NARI / TRACK LIGHTS

FANS

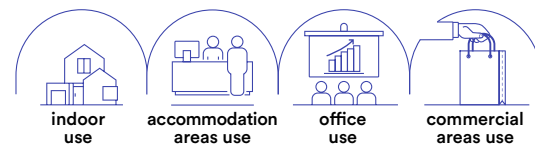

Materiale
alluminio

Colore
bianco opaco
nero opaco
oro



Temperatura colore
3000K / 4000K



Driver
DC48V
non incluso

Material
aluminum

Colour
matt white
matt black
gold




Colour temperature
3000K / 4000K



Driver
DC48V
not included

Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso.
Track headlamp with adjustable spot light for Davinci system with die-cast aluminum structure.



DAVINCI-FANS-W-5C

8031414893874

DAVINCI-FANS-W-5M

8031414893881

lumen

colour temp. | colour



490 lm

DAVINCI-FANS-B-5C

8031414893850

DAVINCI-FANS-B-5M

8031414893867

lumen



490 lm

DAVINCI-FANS-G-5C

8031414893898

DAVINCI-FANS-G-5M

8031414893904

lumen




490 lm

watt

5W

beam angle

24°



DAVINCI-FANS





SISTEMA BINARI / TRACK LIGHTS


In.tec light





Da Vinci Project 48V
Sfere volenti / Rolling spheres

TEMA

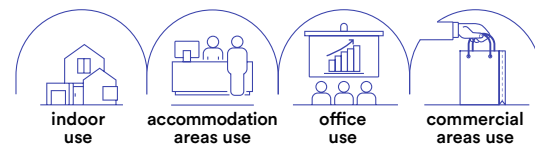



Proiettore a binario con luce spot orientabile per sistema Davinci con struttura in alluminio pressofuso. Diffusore in vetro trasparente.



Track projectors with adjustable spot light for Davinci system with die-cast aluminium structure. Diffuser in clear glass.



- Material**
corpo in alluminio pressofuso
- Colore**
bianco opaco
nero opaco
- 
- Temperatura colore**
3000K / 4000K
- 
- Driver**
DC48V non incluso
- Material**
aluminum die cast body
- Colour**
matt white
matt black
- 
- Colour temperature**
3000K / 4000K
- 
- Driver**
DC48V not included



	colour temp.	colour
DAVINCI-TEMA-5C 8031414876976 lumen		
	490 lm	
DAVINCI-TEMA-5M 8031414876983 lumen		
	490 lm	
watt	5W	
beam angle	38°	


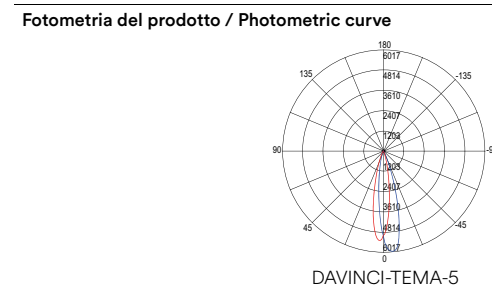
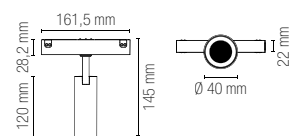




	colour temp.	colour
DAVINCI-TEMA-W-10C 8031414894031 lumen	1200 lm	
DAVINCI-TEMA-W-10M 8031414894048 lumen	1200 lm	
DAVINCI-TEMA-10C 8031414876990 lumen	1200 lm	
DAVINCI-TEMA-10M 8031414878215 lumen	1200 lm	
watt	10W	
beam angle	38°	

	colour temp.	colour
DAVINCI-TEMA-W-20C 8031414894055 lumen	1930 lm	
DAVINCI-TEMA-W-20M 8031414894062 lumen	1930 lm	
DAVINCI-TEMA-20C 8031414878222 lumen	1930 lm	
DAVINCI-TEMA-20M 8031414878239 lumen	1930 lm	
watt	20W	
beam angle	38°	

	colour temp.	colour
DAVINCI-TEMA-W-30C 8031414894079 lumen	3210 lm	
DAVINCI-TEMA-W-30M 8031414894086 lumen	3210 lm	
DAVINCI-TEMA-30C 8031414878246 lumen	3210 lm	
DAVINCI-TEMA-30M 8031414878253 lumen	3210 lm	
watt	30W	
beam angle	38°	

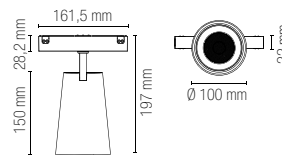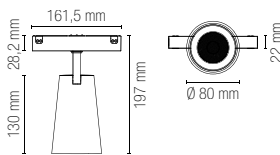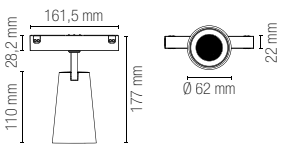

Accessori inclusi / Included accessories



Kit 2pz fermi per corpi illuminanti sistema con sfere volventi /
Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system

Accessori inclusi / Included accessories






Kit 2pz fermi per corpi illuminanti sistema con sfere volventi /
Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system

Accessori inclusi / Included accessories



Kit 2pz fermi per corpi illuminanti sistema con sfere volventi /
Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system

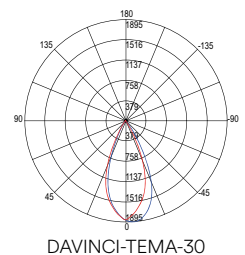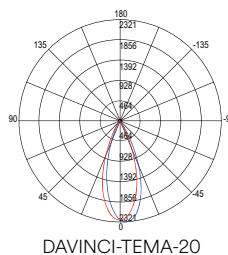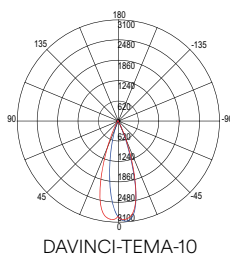


Da Vinci Project 48V
Sfere volventi / Rolling spheres

LINE

Lampada lineare a LED per sistema Davinci con struttura in alluminio pressofuso e finitura in nero gofrato. Disponibile in varie misure.

LED linear lamp for Davinci system with die-cast aluminum structure and embossed black finish.

Available in various sizes.

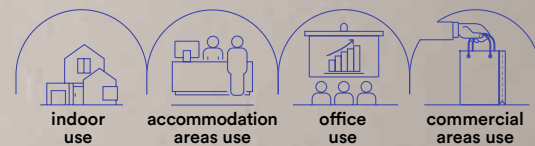

Materiale

corpo in alluminio pressofuso

Colore

nero



Temperatura colore

3000K / 4000K



Driver

DC48V non incluso

Material

aluminum die cast body

Colour

black



Colour temperature

3000K / 4000K




Driver


DC48V not included




Fotometria del prodotto / Photometric curve




DAVINCI-LINE30 UGR




DAVINCI-LINE30



DAVINCI-LINE60




DAVINCI-LINE90



DAVINCI-LINE120

UGR <19

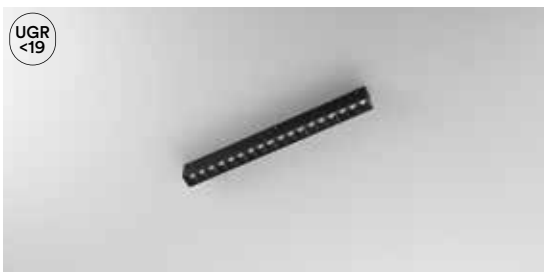

DAVINCI-LINE30C-UGR

8031414878321


lumen

colour temp.



1200 lm

colour




DAVINCI-LINE30M-UGR

8031414878338

lumen



1200 lm



watt	10W
beam angle	30°



DAVINCI-LINE30C

8031414878260


lumen

colour temp.



1150 lm

colour



DAVINCI-LINE30M

8031414878277

lumen



1150 lm



watt	10W
beam angle	110°



DAVINCI-LINE60C

8031414878284


lumen

colour temp.



2300 lm

colour



DAVINCI-LINE60M

8031414878291

lumen



2300 lm



watt	20W
beam angle	110°



DAVINCI-LINE90C

8031414878666


lumen

colour temp.



3450 lm

colour



DAVINCI-LINE90M

8031414878635

lumen



3450 lm



watt	30W
beam angle	110°



DAVINCI-LINE120C

8031414878642


lumen

colour temp.



4600 lm

colour



DAVINCI-LINE120M

8031414878611


lumen



4600 lm



watt	40W
beam angle	110°

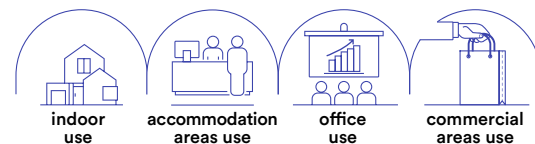

SLIDE

Lampada lineare orientabile a LED per sistema Davinci con struttura in alluminio pressofuso.

LED adjustable linear lamp for Davinci system with die-cast aluminum structure.

Materiale

corpo in alluminio pressofuso

Colore

nero opaco



Temperatura colore

3000K / 4000K



Driver

DC48V non incluso

Material

aluminum die cast body

Colour

matt black



Colour temperature

3000K / 4000K




Driver


DC48V not included




	colour temp.	colour
DAVINCI-SLIDE20C-UGR 8031414878369		
lumen	1020 lm	
DAVINCI-SLIDE20M-UGR 8031414878376		
lumen	1020 lm	
watt	10W	
beam angle	30°	

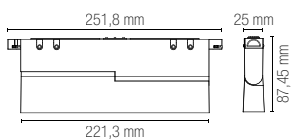


	colour temp.	colour
DAVINCI-SLIDE20C 8031414878345		
lumen	980 lm	
DAVINCI-SLIDE20M 8031414878352		
lumen	980 lm	
watt	10W	
beam angle	110°	

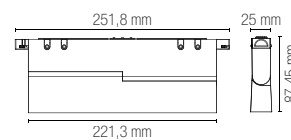

Fotometria del prodotto / Photometric curve




DAVINCI-SLIDE20 UGR



DAVINCI-SLIDE20



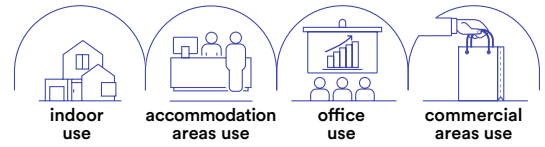

TUBO

Sospensioni tubolari a LED per sistema Davinci con struttura in alluminio pressofuso.

LED tubular suspensions for Davinci system with die-cast aluminum structure.

Materiale

corpo in alluminio pressofuso

Colore

bianco opaco
nero opaco
oro



Temperatura colore

3000K / 4000K



Driver

DC48V non incluso

Material

aluminum
die cast body

Colour

matt white
matt black
gold



Colour temperature

3000K / 4000K




Driver

DC48V not included




	colour temp.	colour
DAVINCI-W-S35C 8031414894093 lumen		
DAVINCI-W-S35M 8031414894109 lumen		
DAVINCI-S35C 8031414878390 lumen		
DAVINCI-S35M 8031414878406 lumen		
DAVINCI-G-S35C 8031414894116 lumen		
DAVINCI-G-S35M 8031414894123 lumen		
watt	3W	
beam angle	24°	


	colour temp.	colour
DAVINCI-S60C 8031414878680 lumen		
DAVINCI-S60M 8031414878659 lumen		
watt	5W	
beam angle	24°	

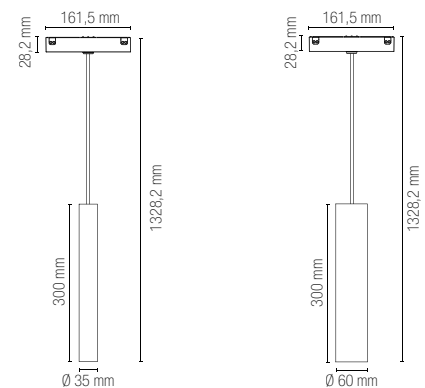

Fotometria del prodotto / Photometric curve




DAVINCI-S35



DAVINCI-S60





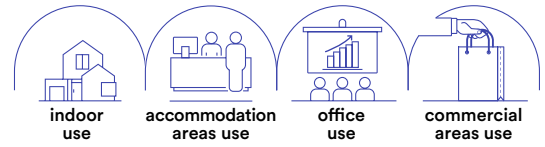

CYMBAL

Lampada a sospensione
LED in alluminio
per sistema a binario.
Aluminum LED suspension
lamp for track system.

Materiale

alluminio

Colore

bianco opaco
nero opaco



Temperatura colore

3000K / 4000K



Driver

DC 48V
non incluso

Material

aluminum

Colour

matt white
matt black



Colour temperature

3000K / 4000K





Driver

DC 48V
not included





	colour temp.	colour
DAVINCI-W-S40C 8031414894017		
lumen	1855 lm	
DAVINCI-W-S40M 8031414894024		
lumen	1855 lm	
DAVINCI-S40C 8031414893997		
lumen	1855 lm	
DAVINCI-S40M 8031414894000		
lumen	1855 lm	

	colour temp.	colour
DAVINCI-W-S15C 8031414893973		
lumen	780 lm	
DAVINCI-W-S15M 8031414893980		
lumen	780 lm	
DAVINCI-S15C 8031414893959		
lumen	780 lm	
DAVINCI-S15M 8031414893966		
lumen	780 lm	

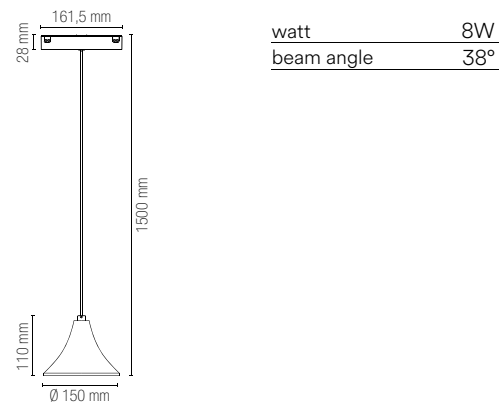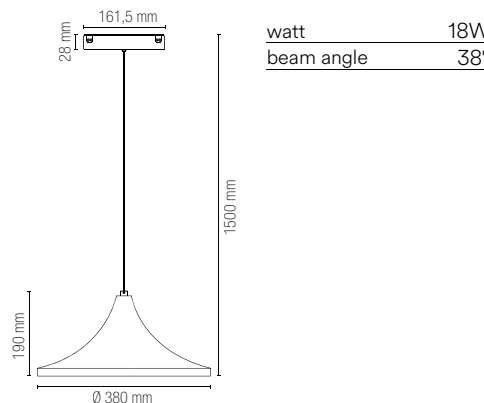


Fotometria del prodotto / Photometric curve

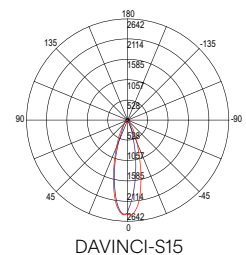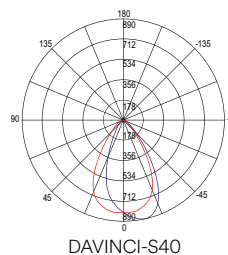

DA VINCI
PROJECT
48V





Da Vinci Project 48V / RECESSED TRACK TRIMLESS

Sistema di montaggio a incasso a filo / Recess mount system trimless

Binari ed accessori / Track rail and components




DAVINCI-TL-2M

8031414878055

Binario sistema Davinci montaggio ad incasso a filo 2 m nero 48V. Tappi e staffa di fissaggio inclusi.

Davinci system track rail invisible recessed trimless mount black colour 2 m 48V. Cups and fixing bracket included.





DAVINCI-TL-L

8031414878109

Connettore angolare in alluminio per binario elettrificato incasso a filo (trimless) sistema sfere volventi.

Angular connection in aluminum for Davinci trimless recessed rail in rolling spheres joint system.

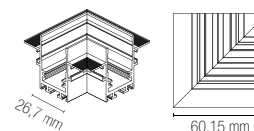


DAVINCI-TL-LVI

8031414878673

Connettore angolare verticale connessione interna per binario elettrificato incasso a filo (trimless) con sistema sfere volventi.

Vertical angular connector internal connection for track electrified recessed rail (trimless) system built in rolling spheres joint system.



DAVINCI-TL-LVE

8031414878147

Connettore angolare verticale con connessione esterna in alluminio per binario elettrificato incasso a filo (trimless) con sistema sfere volventi.

Angular external emission connection in aluminum for electrified track trimless recessed rail in rolling spheres joint system.




DAVINCI-TL-CAP

8031414878093

Tappo laterale per binario da incasso a filo (trimless) sistema sfere volventi.


End cap for Davinci trimless recessed rail in rolling spheres joint system.



Da Vinci Project 48V / RECESSED TRACK

Sistema di montaggio a incasso con cornice / Recess mount system with external trim

Binari ed accessori / Track rail and components

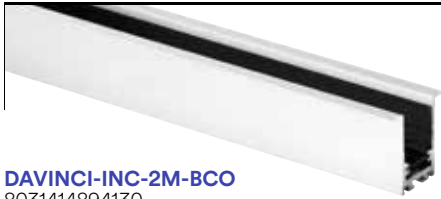

DAVINCI-INC-2M-BCO
8031414894130

Binario sistema Davinci montaggio ad incasso 2 m bianco 48V. Tappi e staffa di fissaggio inclusi.


Davinci system track rail recessed mount white colour 2 m 48V. Cups and fixing bracket included.



DAVINCI-INC-2M
8031414878024

Binario sistema Davinci montaggio ad incasso 2 m nero 48V. Tappi e staffa di fissaggio inclusi.

Davinci system track rail recessed mount black colour 2 m 48V. Cups and fixing bracket included.



DAVINCI-INC-L-BCO
8031414894147


Connettore angolare per binario elettrificato incasso sistema sfere volventi.




Angular connector for electrified track built in rolling spheres joint system.

DAVINCI-INC-L
8031414878116

Connettore angolare per binario elettrificato incasso sistema sfere volventi.



Angular connector for electrified track built in rolling spheres joint system.

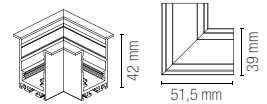

DAVINCI-INC-LVI-BCO
8031414894154

Connettore angolare verticale connessione interna per binario elettrificato incasso sistema sfere volventi.




Vertical angular connector internal connection for track electrified system built in rolling spheres joint system.

DAVINCI-INC-LVI
8031414878123

Connettore angolare verticale connessione interna per binario elettrificato incasso sistema sfere volventi.



Vertical angular connector internal connection for track electrified system built in rolling spheres joint system.



DAVINCI-INC-LVE-BCO
8031414894161

Connettore angolare verticale connessione esterna per binario elettrificato incasso sistema sfere volventi.




Vertical angular connector external connection for track electrified system built in rolling spheres joint system.

DAVINCI-INC-LVE
8031414878130

Connettore angolare verticale connessione esterna per binario elettrificato incasso sistema sfere volventi.



Vertical angular connector external connection for track electrified system built in rolling spheres joint system.



DAVINCI-INC-CAP-BCO
8031414894178

Tappo laterale per binario ad incasso sistema sfere volventi.




End cap for recessed Davinci with rolling spheres joint system.

DAVINCI-INC-CAP
8031414878413

Tappo laterale per binario ad incasso sistema sfere volventi.




End cap for recessed Davinci with rolling spheres joint system.



Da Vinci Project 48V / PENDANT

Sistema di montaggio a sospensione biemissione/ Biemission suspension mounting system

Binari ed accessori / Track rail and components

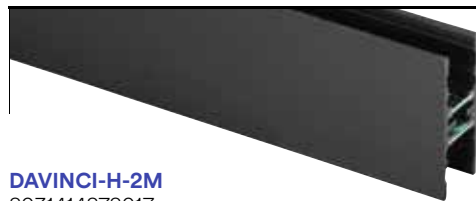


DAVINCI-H-2M

8031414878017

Binario sistema Davinci per montaggio a sospensione con doppia emissione; nero da 2 m 48V. Tappi e staffa di fissaggio inclusi.

Davinci system rail for suspension mounting with double emission; black 2 m 48V. Cups and fixing bracket included.




DAVINCI-H-L

8031414878048

Connettore angolare in alluminio per binario elettrificato biemissione con sistema sfere volventi.

Aluminum angular connection for double emission electrified track with rolling ball system.



DAVINCI-H-CAP

8031414878451

Tappo laterale per binario biemissione con sistema sfere volventi.

End cap for double emitting Davinci rail in rolling spheres joint system.




DAVINCI-BOX

8031414878598

Scatola per alloggiamento driver e collegamento elettrico binari Davinci a sospensione.

Canopy for driver and connection box for suspension Davinci rail.

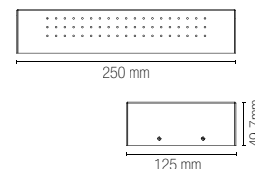


DAVINCI-S-3

8031414879762

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit 2 x 3m steel wire.



Da Vinci Project 48V / SURFACE MOUNTED

Sistema di montaggio a plafoniera o a sospensione a vista/ Ceiling or suspension mounting system

Binari ed accessori / Track rail and components



DAVINCI-ST-2M-BCO

8031414894185

Binario sistema Davinci con montaggio a soffitto o sospensione da 2 m bianco 48V. Tappi e staffa di fissaggio inclusi.

Davinci system rail with ceiling mounting or suspension 2 m white 48V. Cups and fixing bracket included.




DAVINCI-ST-2M

8031414878031

Binario sistema Davinci con montaggio a soffitto o sospensione da 2 m nero 48V. Tappi e staffa di fissaggio inclusi.

Davinci system rail with ceiling mounting or suspension 2 m black 48V. Cups and fixing bracket included.




DAVINCI-ST-L-BCO

8031414894192

Connettore angolare per binario elettrificato montaggio a soffitto o sospensione sistema sfere volventi.

Angular connection for ceiling mounting electrified track or suspension in rolling spheres joint system.





DAVINCI-ST-L

8031414878062

Connettore angolare per binario elettrificato montaggio a soffitto o sospensione sistema sfere volventi.

Angular connection for ceiling mounting electrified track or suspension in rolling spheres joint system.



DAVINCI-ST-LVI-BCO

8031414894208

Connettore angolare per binario elettrificato connessione interna con sistema sfere volventi.

Angular connector for track electrified internal connection with spheres rolling joint system.




DAVINCI-ST-LVI

8031414878079

Connettore angolare per binario elettrificato connessione interna con sistema sfere volventi.

Angular connector for track electrified internal connection with spheres rolling joint system.



DAVINCI-ST-LVE-BCO

8031414894215

Connettore angolare per binario elettrificato connessione esterna e sistema a sfere volventi.

Angular connector for external connection electrified track in rolling spheres joint system.




DAVINCI-ST-LVE

8031414878086

Connettore angolare per binario elettrificato connessione esterna e sistema a sfere volventi.

Angular connector for external connection electrified track in rolling spheres joint system.



DAVINCI-ST-CAP-BCO

8031414894222

Tappo laterale per binario biemissione con sistema sfere volventi.

End cap for double emitting Davinci rail in rolling spheres joint system.



DAVINCI-ST-CAP

8031414878468

Tappo laterale per binario biemissione con sistema sfere volventi.

End cap for double emitting Davinci rail in rolling spheres joint system.



DAVINCI-BOX-BCO

8031414894246

Scatola per alloggiamento driver e collegamento elettrico binari Davinci a sospensione.

Canopy for driver and connection box for suspension Davinci rail.




DAVINCI-BOX

8031414878598

Scatola per alloggiamento driver e collegamento elettrico binari Davinci a sospensione.

Canopy for driver and connection box for suspension Davinci rail.



DAVINCI-S-3-BCO

8031414894239

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit 2 x 3m steel wire.



DAVINCI-S-3

8031414879762

Sistema sospensione 2 cavi di acciaio da 3m per binari Davinci.

Suspension kit 2 x 3m steel wire.



DAVINCI-NEST

8031414878161

Innesto per elettrificazione 48V compatibile con tutti i modelli di binario del sistema Davinci.

48V power engine for all Davinci rail system models.




DAVINCI-FLEX

8031414894253

Innesto per elettrificazione 48V flessibile compatibile con tutti i modelli di binario Davinci.

Flexible 48V electrification mount compatible with all Davinci rail models.



DAVINCI-I-CONN

8031414878178

Connettore 48V compatibile con i modelli di binario sistema Davinci.

Connector 48V compatible with all the Davinci rail system models.



DAVINCI-COVER-2M

8031414878154

Cover nera compatibile con tutti i modelli di binari Davinci 200 cm.

Cover in black colour compatible with all the Davinci track rail models 200 cm.




DAVINCI-L-CONN

8031414878185

Connettore angolare 48V compatibile con tutti i modelli di binario del sistema Davinci.

Angular connector 48V compatible with all the Davinci rail system models.



DAVINCI-BRAKE

8031414878383

Kit 2pz fermi per corpi illuminanti sistema con sfere volventi.

Kit 2pcs of side brake for Davinci light source modules with rolling spheres joint system.




DAVINCI-LVI-CONN

8031414878192

Connettore angolare interno 48V compatibile con tutti i modelli di binario del sistema Davinci.

Internal angular connector 48V compatible with all the Davinci rail system models.




DAVINCI-DR100

8031414924813

Driver 100W 48V per binario Davinci.

100W 48V driver for Davinci system.





DAVINCI-LVE-CONN

8031414878208

Connettore angolare esterno 48V compatibile con tutti i modelli di binario del sistema Davinci.

External angular connector 48V compatible with all the Davinci rail system models.




DAVINCI-DR200

8031414924820

Driver 200W 48V per binario Davinci.

200W 48V driver for Davinci system.



BERNINI PROJECT 48V





In.tec light

SISTEMA BINARI / TRACK LIGHTS

Schema di montaggio sistema binari.
Assembling technical sheet track rail system.


BERNINI PROJECT 48V

INTEC proietta il suo sguardo nel futuro e si immerge nel mondo dell'arte illuminotecnica altamente personalizzata, garantendo contemporaneamente efficienza e flessibilità nel design.

Frutto di un attento studio delle tecnologie più avanzate, il binario Bernini è un sistema completamente elettrificato a bassa tensione. La vasta gamma di corpi illuminanti Bernini, insieme al caleidoscopio di forme, angoli e connessioni disponibili, consente di creare aree luminose dalle pareti o dal soffitto, modificandone i giochi di luce in qualsiasi momento tramite gli elementi luminosi a LED che si inseriscono facilmente con un click, grazie al sistema innovativo ad incastro lungo l'intero percorso.


INTEC casts its gaze into the future and plunges into the world of highly customized lighting art, simultaneously ensuring efficiency and flexibility in design.

The result of a careful study of the most advanced technologies, the Bernini track is a fully electrified low-voltage system. Bernini's wide range of luminaires, together with the kaleidoscope of available shapes, angles and connections, makes it possible to create luminous areas from the walls or ceiling, changing the play of light at any time through LED lighting elements that are easily inserted with a click, thanks to the innovative system of interlocking along the entire path.

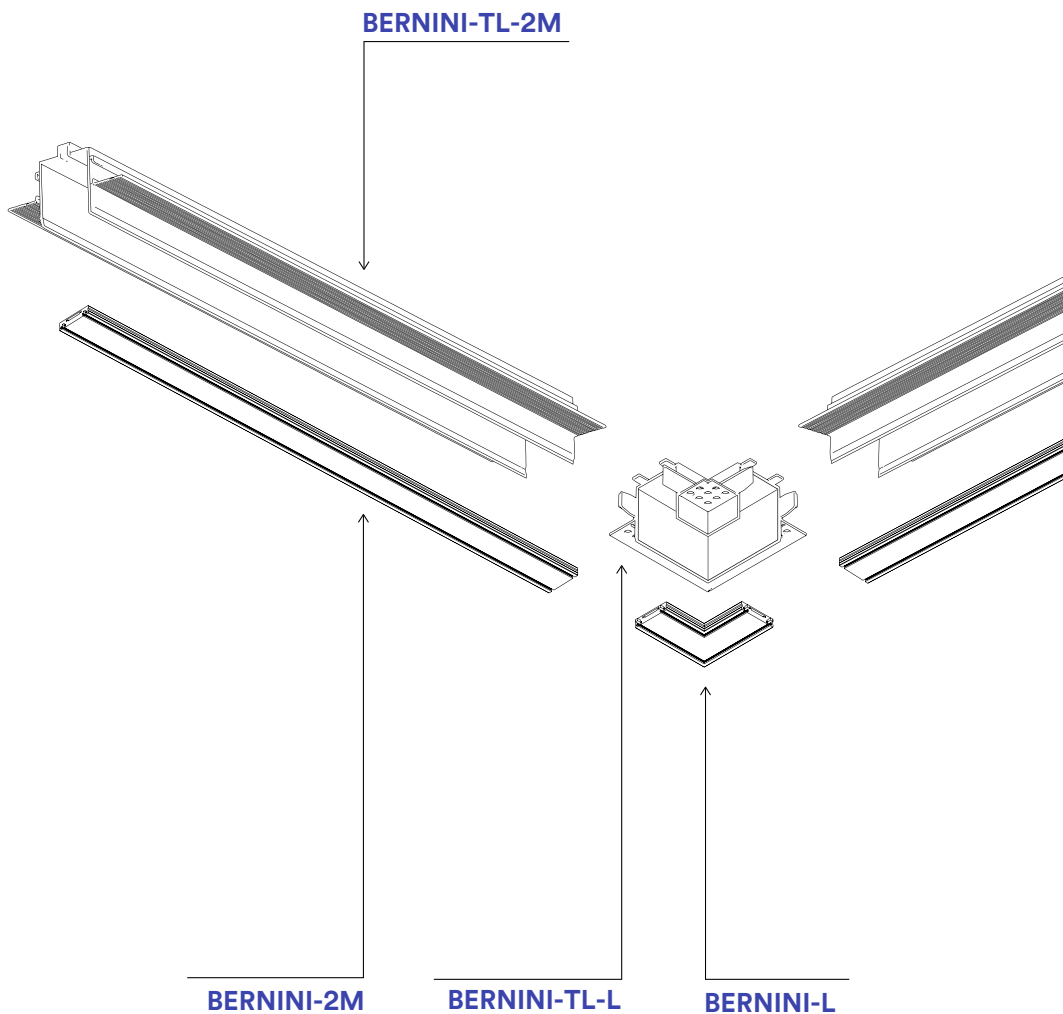


DRIVER

Scelta tra due tipi di driver / Choice between two types of drivers




BERNINI-DR100
BERNINI-DR200



BERNINI-NEST

BERNINI-NEST + other type of DRIVERS-48V (not included)

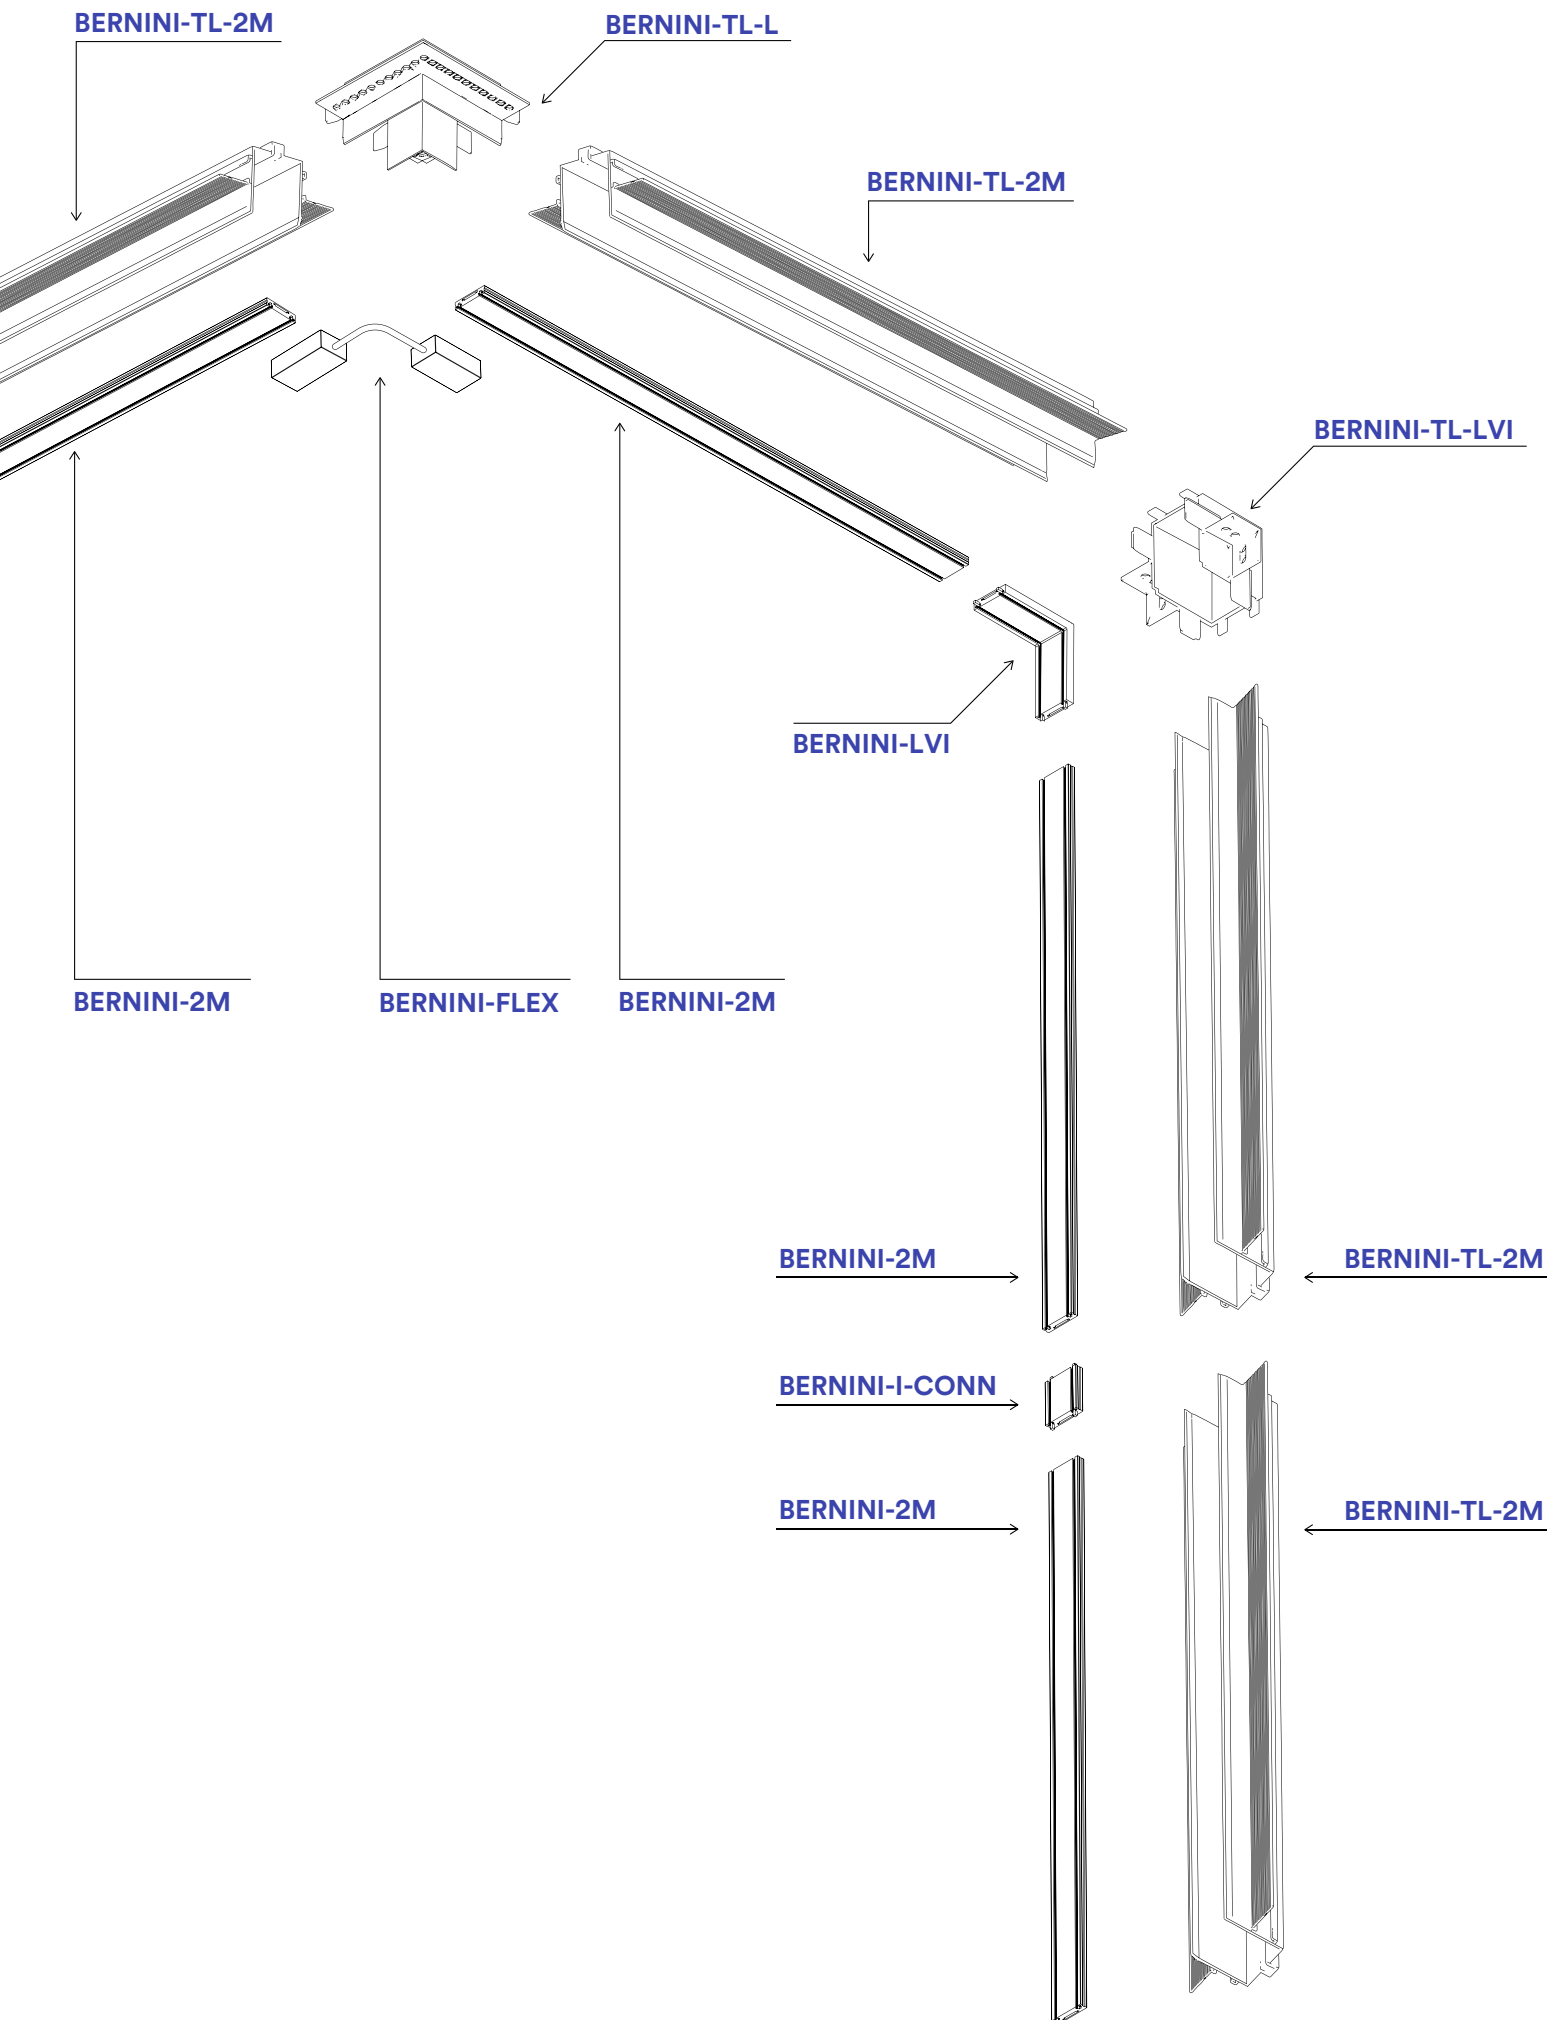


Bernini Project 48V

BERNINI LINE

Lampada lineare orientabile a LED in termoplastica e alluminio con finitura in bianco o nero opaco.

Linear adjustable LED lamp in thermoplastic and aluminum with matt white or black finish.

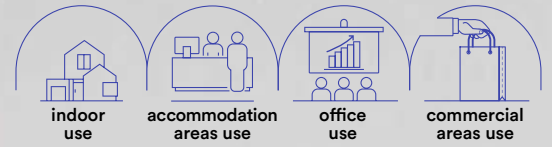

Materiale

alluminio e termoplastica

Colore

bianco opaco
nero opaco



Temperatura colore

3000K / 4000K



Driver

DC48V non incluso

Material

aluminum and thermoplastic

Colour

matt white
matt black



Colour temperature

3000K / 4000K



Driver


DC48V not included



In.tec light **SISTEMA BINARI / TRACK LIGHTS**

BERNINI LINE

Lampada lineare orientabile a LED in termoplastica e alluminio con finitura in bianco o nero opaco.
 Linear adjustable LED lamp in thermoplastic and aluminum with matt white or black finish.

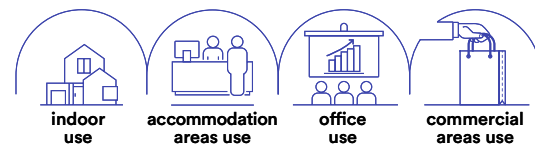

Materiale
 alluminio e termoplastica

Colore
 bianco opaco
 nero opaco



Temperatura colore
 3000K / 4000K



Driver
 DC48V non incluso

Material
 aluminum and thermoplastic

Colour
 matt white
 matt black



Colour temperature
 3000K / 4000K



Driver
 DC48V not included



	colour temp.	colour
BERNINI-LINE12-BCO 8031414920037		
lumen	720 lm	
BERNINI-LINE12 8031414907502		
lumen	720 lm	
watt	6W	
beam angle	30°	



	colour temp.	colour
BERNINI-LINE12-UGR-BCO 8031414920044		
lumen	720 lm	
BERNINI-LINE12-UGR 8031414907519		
lumen	720 lm	
watt	6W	
beam angle	30°	




Accessorio non incluso / Not included accessory
 Adattatore per lampada lineare LED /
 Adapter for linear LED lamp


BERNINI-LINE-ADAT12-BCO 8031414920075	
BERNINI-LINE-ADAT12 8031414898169	





Fotometria del prodotto / Photometric curve



BERNINI-LINE12-UGR




BERNINI-LINE12

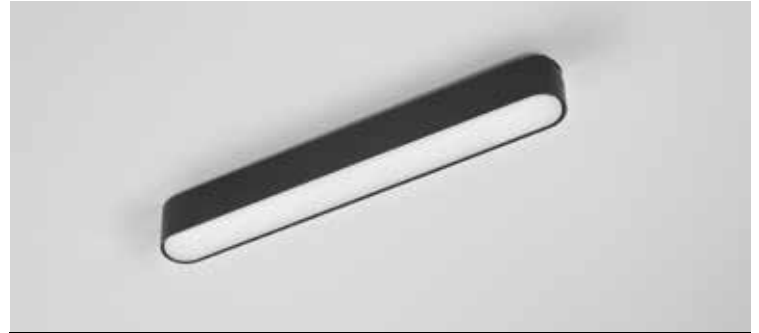

	colour temp.	colour
BERNINI-LINE22-UGR-BCO 8031414920068 lumen		
	1440 lm	
BERNINI-LINE22-UGR 8031414907533 lumen		
	1440 lm	
watt	12W	
beam angle	30°	



	colour temp.	colour
BERNINI-LINE22-BCO 8031414920051 lumen		
	1500 lm	
BERNINI-LINE22 8031414907526 lumen		
	1500 lm	
watt	12W	
beam angle	30°	




Accessorio non incluso / Not included accessory

Adattatore per lampada lineare LED /
Adapter for linear LED lamp

- BERNINI-LINE-ADAT22-BCO**
8031414920082
- BERNINI-LINE-ADAT22**
8031414898176



BERNINI-LINE22-UGR




BERNINI-LINE22

BERNINI FANS

Faro luce spot orientabile per sistema a binario in termoplastica con finitura in bianco o nero opaco.

Adjustable spot light in thermoplastic and aluminum track system with matt white or black finish.

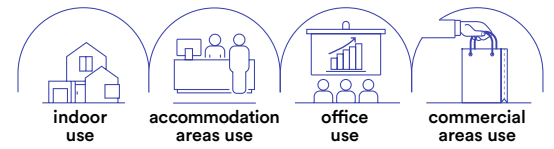

Materiale

alluminio e termoplastica

Colore

bianco opaco
nero opaco



Temperatura colore

3000K / 4000K



Driver

DC48V non incluso

Material

aluminum and thermoplastic

Colour

matt white
matt black



Colour temperature

3000K / 4000K



Driver

DC48V not included



BERNINI-FANS-5-BCO

8031414919994

lumen

BERNINI-FANS-5

8031414907496

lumen

colour temp. colour

550 lm


550 lm

watt

5W

beam angle

24°



BERNINI-FANS-15-BCO

8031414919680

lumen

BERNINI-FANS-15

8031414907489

lumen

colour temp. colour

1750 lm


1750 lm

watt


15W

beam angle


30°




Fotometria del prodotto / Photometric curve



BERNINI-FANS-5

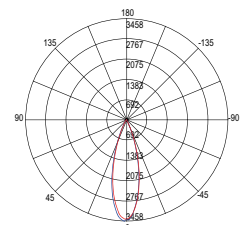

BERNINI-FANS-15



BERNINI TUBO

Lampada sospensione LED per sistema binario in termoplastica e alluminio con finitura in nero opaco.

LED suspension lamp in aluminum and thermoplastic rail system with matt black finish.

Materiale

alluminio e termoplastica

Colore

bianco opaco
nero opaco



Temperatura colore

3000K / 4000K



Driver

DC48V non incluso

Material

aluminum and thermoplastic

Colour

matt white
matt black



Colour temperature

3000K / 4000K




Driver


DC48V not included



	colour temp.	colour
BERNINI-S10-BCO 8031414920112		
lumen	1100 lm	
BERNINI-S10 8031414907540		
lumen	1100 lm	
watt	9W	
beam angle	24°	

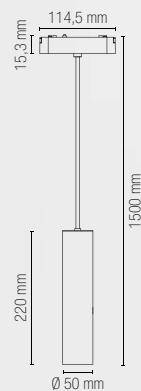









Fotometria del prodotto / Photometric curve



BERNINI-S10

In.tec light SISTEMA BINARI / TRACK LIGHTS

Binari ed accessori.
Track rail and components.

	<p>BERNINI-2M-BCO 8031414919598</p>	<p>Binario Bernini 2 metri bianco 48V. 2 Tappi inclusi.</p>	<p>Bernini track rail white color 2 meters 48V. 2 Cups included.</p>
	<p>BERNINI-L-BCO 8031414920020</p>	<p>Connettore angolare per binario elettrificato 48V.</p>	<p>Corner connector for 48V track.</p>
	<p>BERNINI-T-BCO 8031414920129</p>	<p>Connettore a T per binario elettrificato 48V.</p>	<p>T connector for 48V electrified track.</p>
	<p>BERNINI-X-BCO 8031414920167</p>	<p>Connettore a croce per binario elettrificato 48V.</p>	<p>Cross connector for 48V electrified track.</p>
	<p>BERNINI-LVI-BCO 8031414920099</p>	<p>Connettore angolare per binario elettrificato 48V.</p>	<p>Angular connector for 48V electrified track.</p>
	<p>BERNINI-FLEX-BCO 8031414920006</p>	<p>Innesto per elettrificazione 48V compatibile con tutti i modelli di binario Bernini.</p>	<p>48V electrification mount compatible with all Bernini rail models.</p>
	<p>BERNINI-NEST-BCO 8031414920105</p>	<p>Innesto per elettrificazione 48V compatibile con tutti i modelli di binario Bernini.</p>	<p>48V electrification mount compatible with all Bernini rail models.</p>
	<p>BERNINI-I-CONN-BCO 8031414920013</p>	<p>Connettore 48V compatibile con tutti i modelli di binario Bernini.</p>	<p>48V connector compatible with all Bernini rail models.</p>




BERNINI-2M

8031414897735

Binario Bernini
2 metri nero 48V.
2 Tappi inclusi.

Bernini track rail black
color 2 meters 48V.
2 Cups included.




BERNINI-L

8031414897773

Connettore angolare per
binario elettrificato 48V.

Corner connector
for 48V track.




BERNINI-T

8031414897780

Connettore a T per
binario elettrificato 48V.

T connector for 48V
electrified track.





BERNINI-X

8031414898091

Connettore a croce per
binario elettrificato 48V.

Cross connector for
48V electrified track.




BERNINI-LVI

8031414898107

Connettore angolare per
binario elettrificato 48V.

Angular connector for
48V electrified track.




BERNINI-FLEX

8031414898152

Innesto per elettrificazione
48V compatibile con tutti
i modelli di binario Bernini.

48V electrification
mount compatible with
all Bernini rail models.




BERNINI-NEST

8031414898145

Innesto per elettrificazione
48V compatibile con tutti
i modelli di binario Bernini.

48V electrification
mount compatible with
all Bernini rail models.



BERNINI-I-CONN

8031414898114

Connettore 48V
compatibile con tutti i
modelli di binario Bernini.

48V connector
compatible with all
Bernini rail models.



Binari ed accessori. Track rail and components.



BERNINI-TL-2M-BCO

8031414920136

Alloggio per sistema binario
montaggio ad incasso
a filo 2 metri.

Housing for recessed
trimeless track rail
system 2 meters.



BERNINI-TL-L-BCO

8031414920143

Connettore angolare verticale per
alloggio con montaggio ad incasso
a filo per binario Bernini.

Angular vertical connector for housing
with recessed trimeless track rail system.



BERNINI-TL-LVI-BCO

8031414920150

Connettore angolare verticale
per alloggio con montaggio ad
incasso a filo per binario Bernini.

Angular vertical connector for housing
with recessed trimeless track rail system.



BERNINI-CAP-BCO

8031414919642

kit 2 pezzi tappi laterali per
binario elettrificato 48V.

2 pcs kit caps 48V
electrified track.



BERNINI-COVER-2M-BCO

8031414919659

Cover nera compatibile con
i modelli del binario Bernini.

Black cover compatible with
Bernini track rail models.



BERNINI-DR100-BCO

8031414919666

Driver 48V 100W
corrente costante.

Driver 48V 100W
constant current.




BERNINI-DR200-BCO

8031414919673

Driver 48V 200W
corrente costante.

Driver 48V 200W
constant current.




BERNINI-TL-2M

8031414897759

Alloggio per sistema binario
montaggio ad incasso
a filo 2 metri.

Housing for recessed
trimless track rail
system 2 meters.




BERNINI-TL-L

8031414898138

Connettore angolare verticale per
alloggio con montaggio ad incasso
a filo per binario Bernini.

Angular vertical connector for housing
with recessed trimless track rail system.




BERNINI-TL-LVI

8031414898121

Connettore angolare verticale
per alloggio con montaggio ad
incasso a filo per binario Bernini.

Angular vertical connector for housing
with recessed trimless track rail system.



BERNINI-CAP

8031414897742

kit 2 pezzi tappi laterali per
binario elettrificato 48V.

2 pcs kit caps 48V
electrified track.



BERNINI-COVER-2M

8031414897766

Cover nera compatibile con
i modelli del binario Bernini.

Black cover compatible with
Bernini track rail models.



BERNINI-DR100

8031414898183

Driver 48V 100W
corrente costante.

Driver 48V 100W
constant current.




BERNINI-DR200

8031414897940

Driver 48V 200W
corrente costante.

Driver 48V 200W
constant current.




TRACK RAIL THREE-PHASE






Schema di montaggio sistema binari.
 Assembling technical sheet track rail system.

TRACK RAIL THREE-PHASE

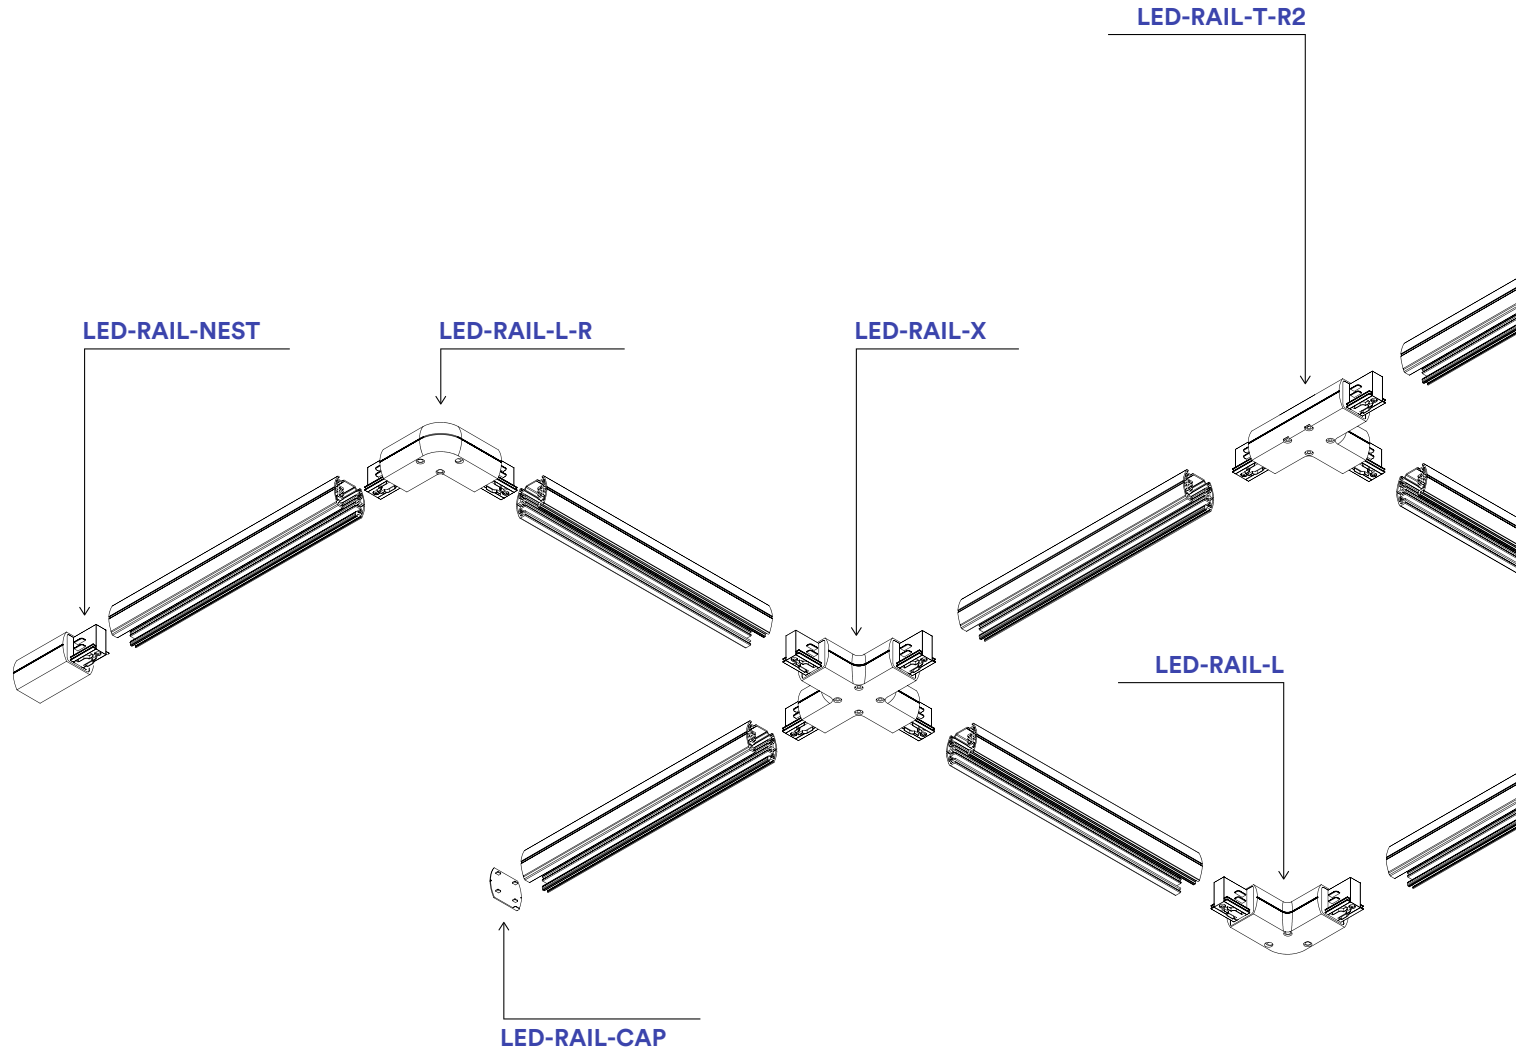



RAIL NEST


Innesto per collegamento elettrico
 /
 Connector for electrical connection



RAIL NEST L


Connettore a L con collegamento elettrico
 /
 L connector with electrical connection

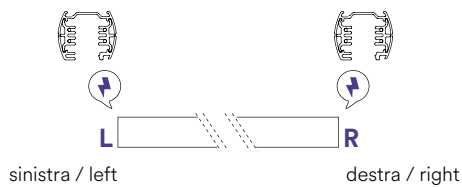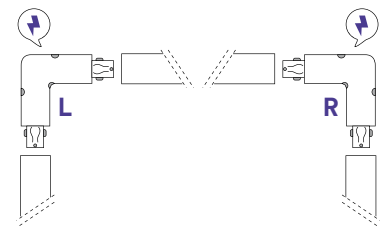

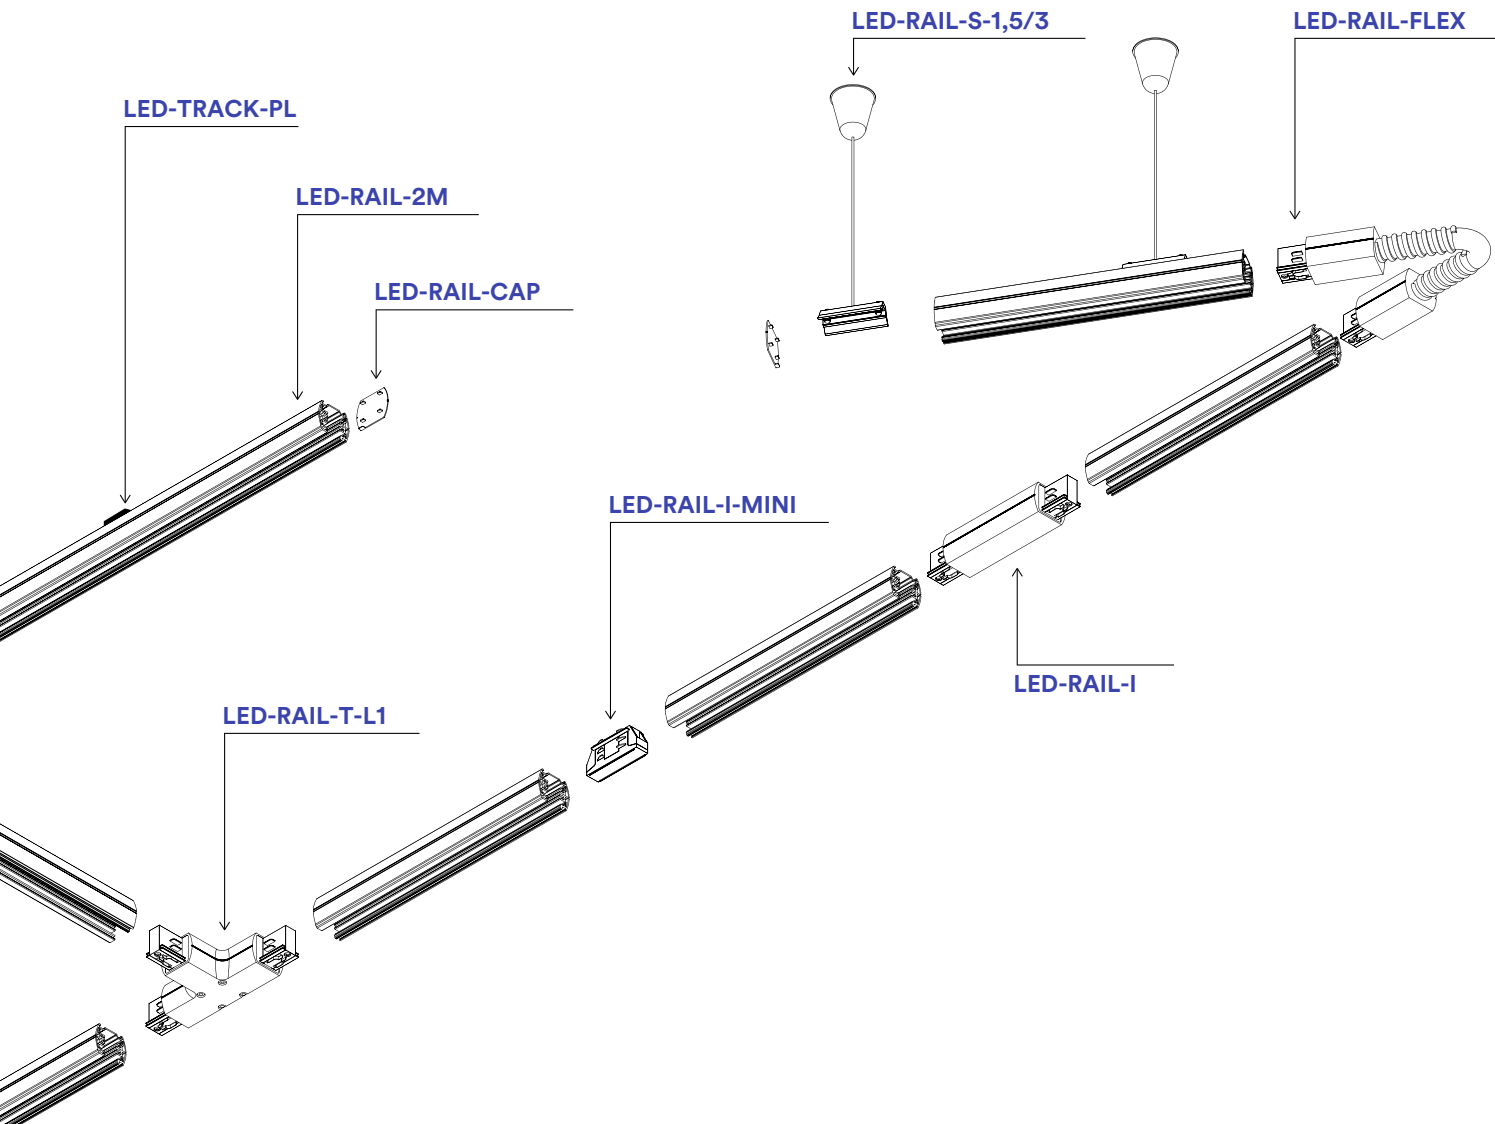


RAIL NEST T

Connettore a T con collegamento elettrico
 /
 T connector with electrical connection

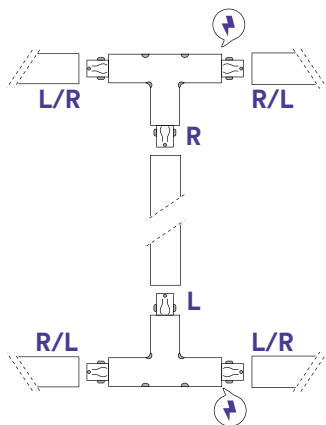


RAIL NEST I

Connettore lineare con collegamento elettrico
 /
 Linear connector with electrical connection




RAIL MINI

Connettore lineare
 /
 Linear connector




RAIL S

Kit sospensione per binario
 /
 Kit suspension for track rail



Trifase / Three-phase

EXPLORER

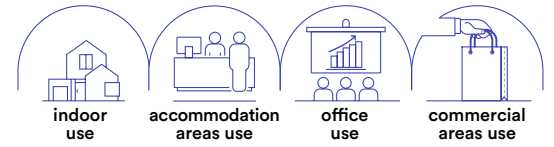

Materiale

alluminio

Colore

bianco opaco
nero opaco



Temperatura colore selezionabile

3000K / 4000K



Driver

incluso

Material

aluminum

Colour

matt white
matt black



Selectable color temperature

3000K / 4000K




Driver

included

Faro a binario in alluminio con adattatore trifase e angolo di luce regolabile.

Aluminum track light with three-phase adapter and adjustable light angle.



Angolo di luce regolabile /
Adjustable beam angle



LED-EXPLORER-BCO

8031414923946

lumen

colour temp.



4800 lm

LED-EXPLORER-NER

8031414923939

lumen



4800 lm

watt


30W

beam angle

15°- 55°

pf

0.90



LED-EXPLORER





In.tec light **SISTEMA BINARI / TRACK LIGHTS**

Trifase / Three-phase

PLANE

Proiettore a binario in alluminio con adattatore trifase.

Aluminum track spotlight with three-phase adapter.

Materiale

corpo in alluminio
pressofuso

Colore

bianco opaco
nero opaco



Temperatura colore

3000K / 4000K



Driver

incluso

Material

aluminum
die cast body

Colour

matt white
matt black



Colour temperature

3000K / 4000K



Driver




included






	colour temp.	colour
LED-PLANE-W-20C 8031414924714 lumen	2400 lm	
LED-PLANE-W-20M 8031414924721 lumen	2400 lm	
LED-PLANE-B-20C 8031414924691 lumen	2400 lm	
LED-PLANE-B-20M 8031414924707 lumen	2400 lm	
watt	20W	
beam angle	38°	

	colour temp.	colour
LED-PLANE-W-30C 8031414924752 lumen	3600 lm	
LED-PLANE-W-30M 8031414924769 lumen	3600 lm	
LED-PLANE-B-30C 8031414924738 lumen	3600 lm	
LED-PLANE-B-30M 8031414924745 lumen	3600 lm	
watt	30W	
beam angle	38°	


	colour temp.	colour
LED-PLANE-W-40C 8031414924790 lumen	4800 lm	
LED-PLANE-W-40M 8031414924806 lumen	4800 lm	
LED-PLANE-B-40C 8031414924776 lumen	4800 lm	
LED-PLANE-B-40M 8031414924783 lumen	4800 lm	
watt	40W	
beam angle	38°	



Fotometria del prodotto / Photometric curve

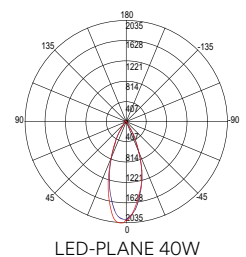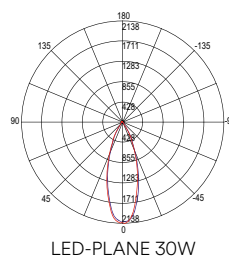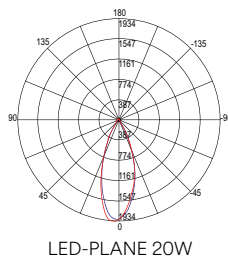

Trifase / Three-phase

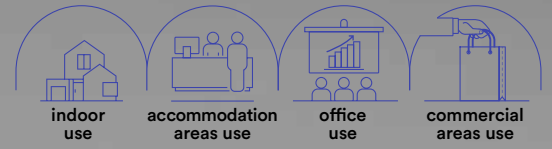

JET ALTO LUMEN

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track spotlight with three-phase adapter.



Materiale

corpo in alluminio
pressofuso

Colore

bianco opaco
nero opaco



**Temperatura colore
selezionabile**

3000K / 4000K



Driver

incluso

Material

aluminum
die cast body

Colour

matt white
matt black




**Selectable color
temperature**


3000K / 4000K




Driver

included







	colour temp.	colour
LED-JET-W-20HL 8031414924110		
lumen	4000 lm	
LED-JET-B-20HL 8031414924080		
lumen	4000 lm	
watt	20W	
beam angle	38°	
pf	0.90	



	colour temp.	colour
LED-JET-W-30HL 8031414924127		
lumen	6000 lm	
LED-JET-B-30HL 8031414924097		
lumen	6000 lm	
watt	30W	
beam angle	38°	
pf	0.90	



	colour temp.	colour
LED-JET-W-40HL 8031414924134		
lumen	8000 lm	
LED-JET-B-40HL 8031414924103		
lumen	8000 lm	
watt	40W	
beam angle	38°	
pf	0.90	



Accessori non inclusi / Not included accessories

Retina antiabbagliamento /
Anti-glare retina




LED-JET-MESH60 8031414924073	for 20W
LED-JET-MESH70 8031414924066	for 30W
LED-JET-MESH80 8031414924059	for 40W

Deviatore flusso luminoso /
Luminous flux diverter




LED-JET-DIFF60 8031414924042	for 20W
LED-JET-DIFF70 8031414924035	for 30W
LED-JET-DIFF80 8031414924028	for 40W


Fotometria del prodotto / Photometric curve



LED-JET ALTO LUMEN 20W



LED-JET ALTO LUMEN 30W





LED-JET ALTO LUMEN 40W

Trifase / Three-phase

JET

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track spotlight with three-phase adapter.

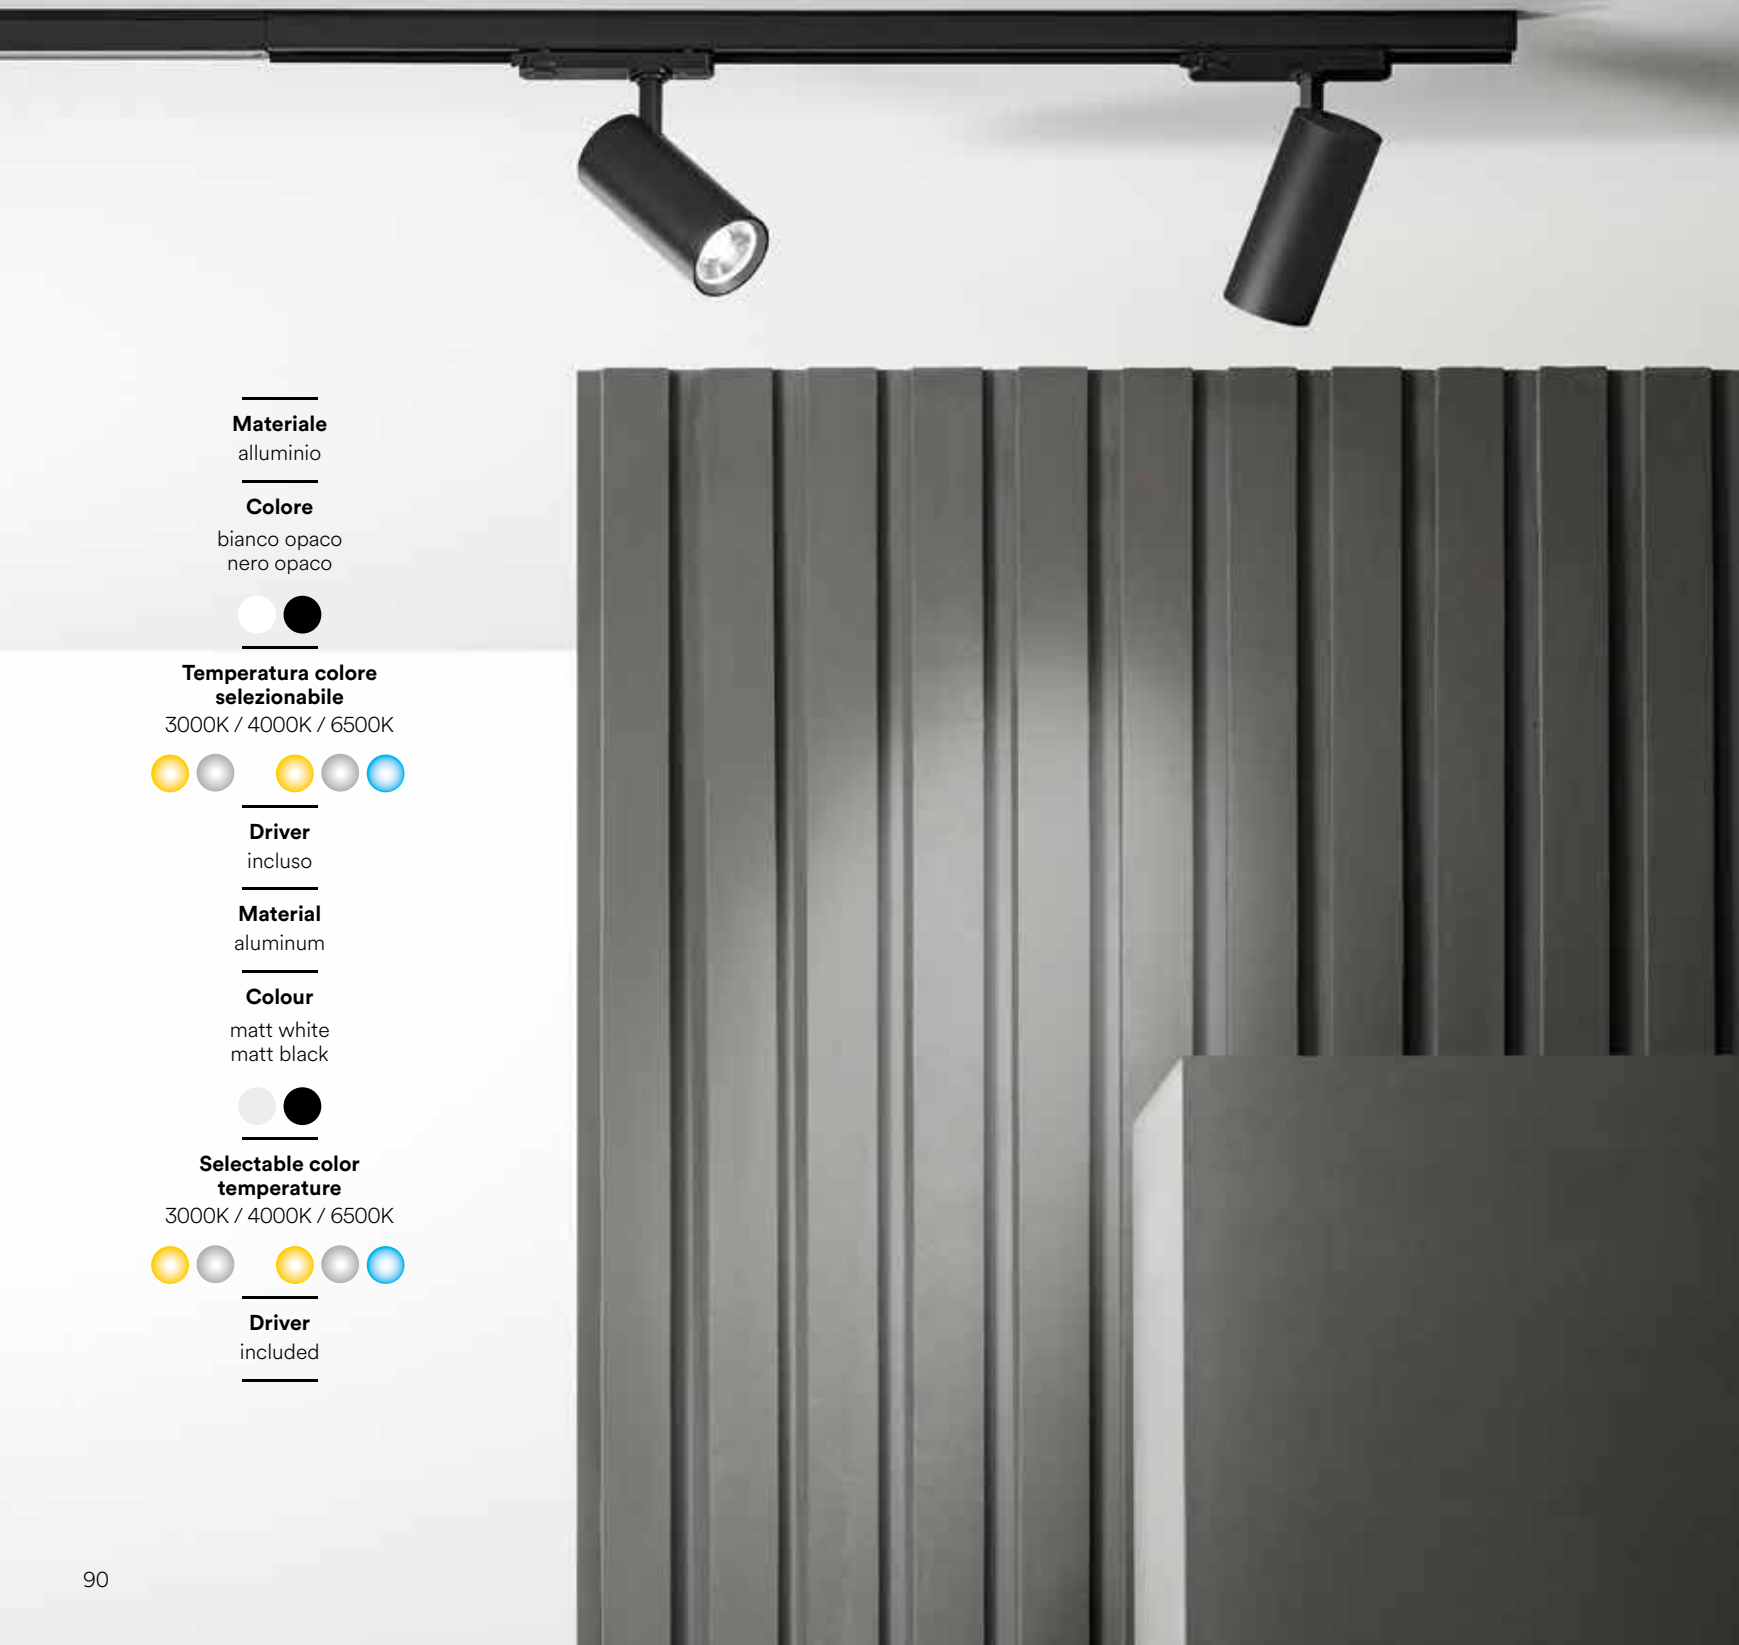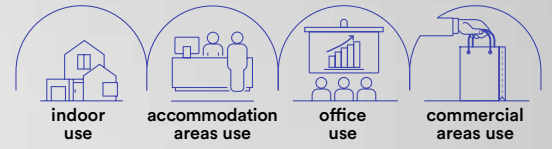

Materiale
alluminio

Colore

bianco opaco
nero opaco



**Temperatura colore
selezionabile**

3000K / 4000K / 6500K



Driver

incluso

Material

aluminum

Colour

matt white
matt black



**Selectable color
temperature**

3000K / 4000K / 6500K



Driver

included



DALI		colour temp.	colour
	LED-JET-W-20DA 8031414923755		
lumen		4000 lm	
	LED-JET-B-20DA 8031414923724		
lumen		4000 lm	
watt	20W		
beam angle	38°		
pf	0.90		




DALI		colour temp.	colour
	LED-JET-W-30DA 8031414923762		
lumen		6000 lm	
	LED-JET-B-30DA 8031414923731		
lumen		6000 lm	
watt	30W		
beam angle	38°		
pf	0.90		

DALI		colour temp.	colour
	LED-JET-W-40DA 8031414923779		
lumen		8000 lm	
	LED-JET-B-40DA 8031414923748		
lumen		8000 lm	
watt	40W		
beam angle	38°		
pf	0.90		




DALI		colour temp.	colour
	LED-JET-W-20 8031414893805		
lumen		2100 lm	
	LED-JET-B-20 8031414893775		
lumen		2100 lm	
watt	20W		
beam angle	38°		
pf	0.90		

DALI		colour temp.	colour
	LED-JET-W-30 8031414893812		
lumen		3235 lm	
	LED-JET-B-30 8031414893782		
lumen		3235 lm	
watt	30W		
beam angle	38°		
pf	0.90		

DALI		colour temp.	colour
	LED-JET-W-40 8031414893829		
lumen		4300 lm	
	LED-JET-B-40 8031414893799		
lumen		4300 lm	
watt	40W		
beam angle	38°		
pf	0.90		




Fotometria del prodotto / Photometric curve

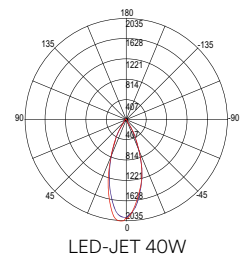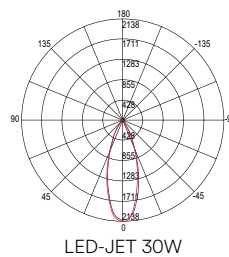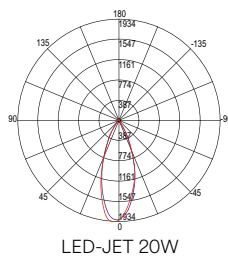

Trifase / Three-phase

JET FOOD

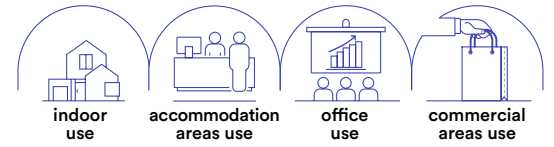

Materiale

corpo in alluminio pressofuso

Colore

bianco opaco
nero opaco



Temperatura colore

2500K / 3000K / 3100K



Driver

integrato

Material

aluminum
die cast body

Colour

matt white
matt black



Colour temperature

2500K / 3000K / 3100K




Driver

built-in

Proiettore a binario in alluminio pressofuso con adattatore trifase per l'illuminazione di generi alimentari.

Die-cast aluminum track projector with three-phase adapter for food lighting.



illuminazione per generi alimentari / Food lighting




	colour temp.	K	CRI	colour
LED-JET-W-30BR 8031414924189				
LED-JET-B-30BR 8031414924141				
lumen	4800 lm	2550 K	>90	
LED-JET-W-30RM 8031414924196				
LED-JET-B-30RM 8031414924158				
lumen	4800 lm	3100 K	>70	
LED-JET-W-30FM 8031414924202				
LED-JET-B-30FM 8031414924165				
lumen	4800 lm	3000 K	>63	
LED-JET-W-30FR 8031414924219				
LED-JET-B-30FR 8031414924172				
lumen	4800 lm	3000 K	>93	
watt				30W
beam angle				38°
pf				0.90



Trifase / Three-phase

OBOE

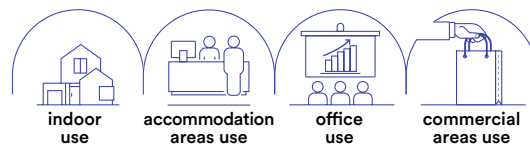

Materiale

corpo in alluminio pressofuso

Colore

bianco
nero
cromo
oro
bronzo



Temperatura colore

3000K / 4000K



Driver

integrato

Material

aluminum
die cast body

Colour

white
black
chrome
gold
bronze




Colour temperature

3000K / 4000K



Driver

built-in




LED-OBOE-SC



Sospensione in alluminio pressofuso con adattatore trifase.

Die-cast aluminum suspension with three-phase adapter.




	colour temp.	colour
LED-OBOE-SC BCO 8031414865109		
LED-OBOE-SM BCO 8031414862047		
lumen	240 lm	
LED-OBOE-SC NERO 8031414865147		
LED-OBOE-SM NERO 8031414862030		
lumen	240 lm	
LED-OBOE-SC CR 8031414865130		
LED-OBOE-SM CR 8031414862061		
lumen	240 lm	
LED-OBOE-SC ORO 8031414865123		
LED-OBOE-SM ORO 8031414862054		
lumen	240 lm	
LED-OBOE-SC BRO 8031414865116		
LED-OBOE-SM BRO 8031414864287		
lumen	240 lm	
watt	3,5W	
beam angle	40°	

SISTEMA BINARI / TRACK LIGHTS

In.tec light

Trifase / Three-phase

ROCKET

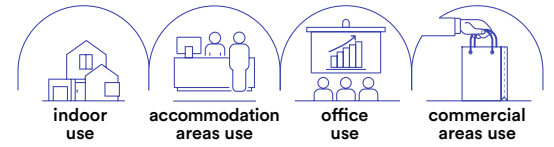


Materiale

corpo in alluminio pressofuso

Colore

bianco opaco
nero opaco
cromo
oro
bronzo



Temperatura colore selezionabile

3000K / 4000K



Driver

integrato

Material

aluminum
die cast body

Colour

matt white
matt black
chrome
gold
bronze




Selectable color temperature

3000K / 4000K



Driver

built-in




LED-ROCKET-7



Proiettore a binario con luce spot in alluminio pressofuso con adattatore trifase.

Track headlamp with spot light in die-cast aluminum with three-phase adapter.



LED-ROCKET-BCO

8031414923953

lumen

colour temp.	colour
980 lm	

LED-ROCKET-NER

8031414923984

lumen

980 lm		

LED-ROCKET-CR

8031414923977

lumen

980 lm		

LED-ROCKET-ORO

8031414923991

lumen

980 lm		

LED-ROCKET-BRO

8031414923960

lumen


980 lm		

watt	7W
beam angle	38°

Trifase / Three-phase

ROCKET

Spot applique.
Wall spot light.

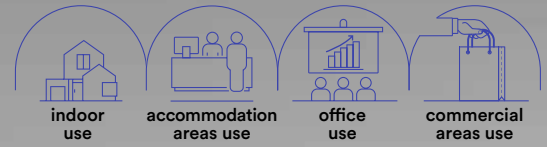

Materiale

corpo in alluminio
pressofuso

Colore

bianco opaco
nero opaco



**Temperatura colore
selezionabile**

3000K / 4000K



Driver

integrato

Material

aluminum
die cast body

Colour

matt white
matt black




**Selectable color
temperature**

3000K / 4000K



Driver

built-in



LED-ROCKET-AP-BCO

8031414924004

lumen

colour temp.	colour

980 lm

LED-ROCKET-AP-NER

8031414924011

lumen


980 lm

watt


7W

beam angle

38°



LED-ROCKET-APC



SISTEMA BINARI / TRACK LIGHTS

In.tec light

Trifase / Three-phase

SQUIB

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track headlamp with three-phase adapter.



	colour	
I-SQUIB-BCO 8031414883226		
I-SQUIB-NER 8031414883233		
I-SQUIB-ORO 8031414895397		



1 x GU10 MAX 25W



Trifase / Three-phase

EXPRESS

Proiettore a binario in alluminio con adattatore trifase.
Aluminum track headlamp with three-phase adapter.

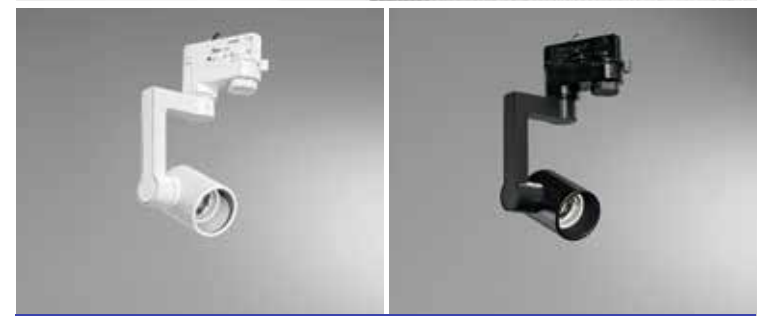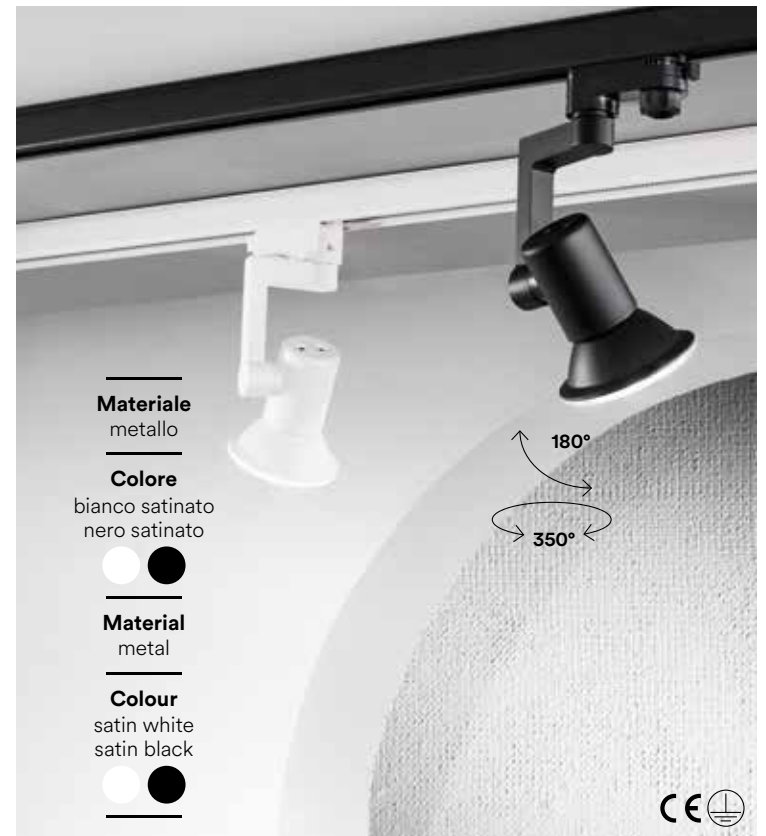


	colour	
LED-EXPRESS 8031440360470		
LED-EXPRESS-B 8031414864676		

1 x E27 MAX 42W



Trifase / Three-phase

CLOCK

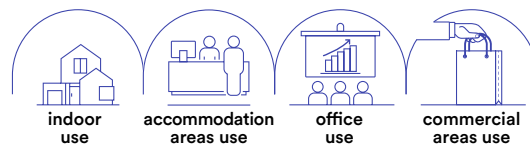

indoor use

accommodation areas use

office use

commercial areas use

Materiale

alluminio con cavo in tessuto nero

Colore

romo
nero anodizzato



Material

aluminum with black fabric cable


Colour

chrome
black anodized



Sospensione in alluminio con adattatore trifase e cavo in tessuto nero.

Pendant lamp in aluminum with three-phase adaptor and black fabric cable.

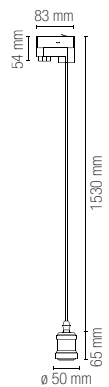

I-TRACK-CLOCK-CR

8031414864072

I-TRACK-CLOCK-NERO

8031414864096

1 x E27 MAX 60W

colour



Lampadina non inclusa / Light bulb not included




Portalampada incluso / Lampholder included

SISTEMA BINARI / TRACK LIGHTS

In.tec light

Trifase / Three-phase

MAXWELL



Materiale
alluminio

Colore
bianco
nero



Temperatura colore
3000K / 4000K



Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour
white
black



Colour temperature
3000K / 4000K



Driver
built-in

Life time and on/off
50.000h
>25.000 on/off




Lampada lineare in alluminio con adattatore trifase.

Linear aluminum lamp with three-phase adapter.




	colour temp.	colour
MAXWELL-W-25C 8031414884056	3000K	White
MAXWELL-W-25M 8031414884049	3000K	White
MAXWELL-B-25C 8031414884070	3000K	Black
MAXWELL-B-25M 8031414884063	3000K	Black

Fotometria del prodotto / Photometric curve

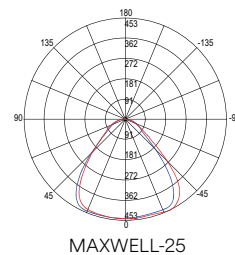


watt 25W
beam angle 90°

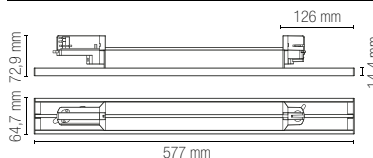


	colour temp.	colour
MAXWELL-W-48C 8031414884018	6500K	White
MAXWELL-W-48M 8031414884001	6500K	White
MAXWELL-B-48C 8031414884032	6500K	Black
MAXWELL-B-48M 8031414884025	6500K	Black


Fotometria del prodotto / Photometric curve

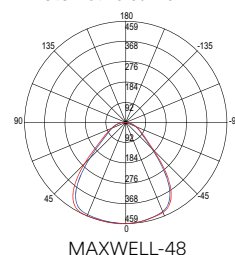


watt 48W
beam angle 90°

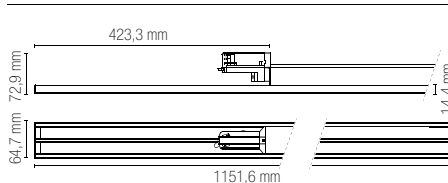

Interruttore per regolazione potenza / Power switchable:
48W - 44W - 40W - 34W
130 LM/W




Accessori non inclusi / Not included accessories



BUSMAX-LENS-25

8031414884117
Lente per doppio fascio luminoso 25° / Double lens 25°
Per i modelli **MAXWELL 25** occorrono 2 pezzi per l'intera lampada / 2 pieces need for the whole **MAXWELL 25** models
Per i modelli **MAXWELL 48** occorrono 4 pezzi per l'intera lampada / 4 pieces need for the whole **MAXWELL 48** models

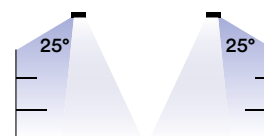

BUSMAX-LENS-RL


8031414884124
Lente fascio di luce asimmetrica 25° sx-dx / Asymmetric lens 25° sx-dx
Per i modelli **MAXWELL 25** occorrono 2 pezzi per l'intera lampada / 2 pieces need for the whole **MAXWELL 25** models
Per i modelli **MAXWELL 48** occorrono 4 pezzi per l'intera lampada / 4 pieces need for the whole **MAXWELL 48** models

Trifase / Three-phase

HELP TRACK

Lampade di emergenza LED in policarbonato per sistema binario trifase.

LED emergency lamps in polycarbonate for three-phase track system.

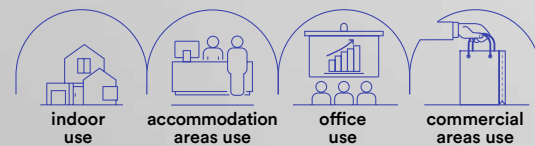



Materiale
policarbonato

Colore
bianco
nero



Temperatura colore
4000K



Material
polycarbonate

Colour
white
black



Colour temperature
4000K




LED-HELP-W-TRACK

8031414884179

lumen

colour temp. | colour



250 lm

LED-HELP-B-TRACK

8031414884162

lumen




250 lm

watt

2W

beam angle

140°

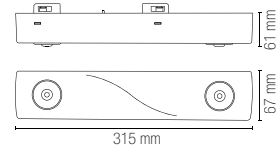

LiFePO4 3.2V 3200mAh

Batteria per emergenza inclusa /
Included emergency battery



RAIL

Binari ed accessori.
Track rail and components.



LED-RAIL-1M-BCO
8031414917211

Binari elettrificati trifase in alluminio bianco da un 1 m con tappi inclusi.

1 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-RAIL-2M-BCO
8031414917235

Binari elettrificati trifase in alluminio bianco da 2 m con tappi inclusi.

2 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-RAIL-3M-BCO
8031414917259

Binari elettrificati trifase in alluminio bianco da 3 m con tappi inclusi.

3 m track rail in white aluminum with three-phase adaptor and endcap included.



LED-RAIL-PL-BCO
8031414925247

Kit 2 pz. Basette bianche per binario guida trifase.

Kit 2 pcs. white base for track rail three-phase.



LED-TRACK-BASE
8031440361668

Base tonda bianca per faro adattatore trifase (adatto per EXPRESS, ROCKET, SQUIB, OBOE).

White round base for track lamp with three-phase adaptor (useful items EXPRESS, ROCKET, SQUIB, OBOE).



LED-RAIL-CAP-BCO
8031414917273

Tappo per binario trifase bianco.


White cap for three-phase track rail.



LED-TRACK-ADAT
8031414866410

Adattatore bianco per binario trifase.


White adapt for three-phase track rail.



LED-RAIL-S-1,5-BCO
8031414918034

Sistema sospensione 1,5 m per binari bianco.

White suspension 1,5 m for track rail.



LED-RAIL-S-3-BCO
8031414917457

Sistema sospensione 3 m per binari bianco.


White suspension 3 m for track rail.



LED-RAIL-1M-NER
8031414917228

Binari elettrificati trifase in alluminio nero da un 1 m con tappi inclusi.

1 m track rail in black aluminum with three-phase adaptor and endcap included.



LED-RAIL-2M-NER
8031414917242

Binari elettrificati trifase in alluminio nero da 2 m con tappi inclusi.

2 m track rail in black aluminum with three-phase adaptor and endcap included.

LED-RAIL-3M-NER
8031414917266

Binari elettrificati trifase in alluminio nero da 3 m con tappi inclusi.


3 m track rail in black aluminum with three-phase adaptor and endcap included.



LED-RAIL-PL-NER
8031414925254

Kit 2 pz. basette nere per binario guida trifase.


Kit 2 pcs. black base for track rail three-phase.



LED-TRACK-BASE NERO
8031440361675

Base tonda nera per faro adattatore trifase (adatto per EXPRESS, ROCKET, SQUIB, OBOE).


Black round base for track lamp with three-phase adaptor (useful items EXPRESS, ROCKET, SQUIB, OBOE).



LED-RAIL-CAP-NER
8031414917280

Tappo per binario trifase nero.



Black cap for three-phase track rail.



LED-TRACK-ADAT NERO
8031414866397

Adattatore nero per binario trifase.



Black adapt for three-phase track rail.



LED-RAIL-S-1,5-NER
8031414917440

Sistema sospensione 1,5 m per binari nero.


Black suspension 1,5 m for track rail.



LED-RAIL-S-3-NER
8031414917464

Sistema sospensione 3 m per binari nero.

Black suspension 3 m for track rail.
















RAIL

Binari ed accessori.

Track rail and components.

	<p>LED-RAIL-I-MINI-BCO 8031414917938</p> <p>Connettore lineare mini bianco a scomparsa per sistema binari trifase.</p>	<p>White mini invisible connector for three-phase track rail system.</p>
	<p>LED-RAIL-NEST-SX-BCO 8031414917990</p> <p>Innesto bianco sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.</p>	<p>White recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.</p>
	<p>LED-RAIL-NEST-DX-BCO 8031414918010</p> <p>Innesto bianco destro per binari guida entrata L N + cavo di terra per circuito a trifase.</p>	<p>White recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.</p>
	<p>LED-RAIL-I-BCO 8031414917914</p> <p>Connettore bianco lineare per binari sistema trifase.</p>	<p>White straight connector for three-phase track rail system.</p>
	<p>LED-RAIL-FLEX-BCO 8031414917891</p> <p>Connettore bianco flessibile per sistema trifase.</p>	<p>White flexible power connector for three-phase track rail system.</p>
	<p>LED-RAIL-X-BCO 8031414917556</p> <p>Connettore a croce bianco per sistema trifase.</p>	<p>White cross connector for three-phase system.</p>
	<p>LED-RAIL-L-DX-BCO 8031414917976</p> <p>Connettore bianco track destro a L per binari guida trifase.</p>	<p>White L connector right side for three-phase track rail system.</p>
	<p>LED-RAIL-L-SX-BCO 8031414917952</p> <p>Connettore bianco track sinistro a L per binari guida trifase.</p>	<p>White L connector left side for three-phase track rail system.</p>

	LED-RAIL-I-MINI-NER 8031414917945	Black mini invisible connector for three phase track rail system.	
	LED-RAIL-NEST-SX-NER 8031414918003	Black recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.	
	LED-RAIL-NEST-DX-NER 8031414918027	Black recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.	
	LED-RAIL-I-NER 8031414917921	Black straight connector for three-phase track rail system.	
	LED-RAIL-FLEX-NER 8031414917907	Black flexible power connector for three-phase track rail system.	
	LED-RAIL-X-NER 8031414917563	Black cross connector for three-phase system.	
	LED-RAIL-L-DX-NER 8031414917983	Black L connector right side for three-phase track rail system.	
	LED-RAIL-L-SX-NER 8031414917969	Black L connector left side for three-phase track rail system.	

RAIL

Binari ed accessori.

Track rail and components.



LED-RAIL-T-DX1-BCO

8031414917518



Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Right white T connector for L N input guide rails + ground cable for three-phase system.

LED-RAIL-T-SX1-BCO

8031414917495



Connettore bianco sinistro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Left white T connector for L N input guide rails + ground cable for three-phase system.

LED-RAIL-T-DX2-BCO

8031414917532



Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Right white T connector for L N input guide rails + ground cable for three-phase system.

LED-RAIL-T-SX2-BCO

8031414917471



Connettore bianco a T per binari guida entrata L N + cavo di terra per circuito trifase.

White T connector for L N input guide rails + ground cable for three-phase circuit.




LED-RAIL-T-DX1-NER
8031414917525



Connettore nero destro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Right black T connector
for L N input guide
rails + ground cable for
three-phase system.




LED-RAIL-T-SX1-NER
8031414917501



Connettore nero sinistro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Left black T connector
for L N input guide
rails + ground cable for
three-phase system.




LED-RAIL-T-DX2-NER
8031414917549



Connettore nero destro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Right black T connector
for L N input guide
rails + ground cable for
three-phase system.




LED-RAIL-T-SX2-NER
8031414917488



Connettore nero a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Black T connector
for L N input guide
rails + ground cable for
three-phase circuit.



Trifase / Three-phase

RAIL

Binari ed accessori.

Track rail and components.



LED-RAIL-1M-DA-BCO

8031414926169



Binari elettrificati trifase in alluminio bianco da un 1 m con tappi inclusi.

1 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-RAIL-2M-DA-BCO

8031414926183



Binari elettrificati trifase in alluminio bianco da 2 m con tappi inclusi.

2 m track rail in white aluminum with three-phase adaptor and endcap included.

LED-RAIL-3M-DA-BCO

8031414926206



Binari elettrificati trifase in alluminio bianco da 3 m con tappi inclusi.

3 m track rail in white aluminum with three-phase adaptor and endcap included.



LED-RAIL-PL-DA-BCO

8031414926428



Kit 2 pz. Basette bianche per binario guida trifase.

Kit 2 pcs. white base for track rail three-phase.




LED-RAIL-CAP-DA-BCO

8031414926220



Tappo per binario trifase bianco.

White cap for three-phase track rail.




LED-RAIL-S-1,5-DA-BCO

8031414926381



Sistema sospensione 1,5 m per binari bianco.

White suspension 1,5 m for track rail.



LED-RAIL-S-3-DA-BCO

8031414926404



Sistema sospensione 3 m per binari bianco.

White suspension 3 m for track rail.

technical information




LED-RAIL-1M-DA-NER
8031414926176



Binari elettrificati trifase in alluminio nero da un 1 m con tappi inclusi.

1 m track rail in black aluminum with three-phase adaptor and endcap included.



LED-RAIL-2M-DA-NER
8031414926190



Binari elettrificati trifase in alluminio nero da 2 m con tappi inclusi.

2 m track rail in black aluminum with three-phase adaptor and endcap included.

LED-RAIL-3M-DA-NER
8031414926213



Binari elettrificati trifase in alluminio nero da 3 m con tappi inclusi.

3 m track rail in black aluminum with three-phase adaptor and endcap included.




LED-RAIL-PL-DA-NER
8031414926435



Kit 2 pz. basette nere per binario guida trifase.

Kit 2 pcs. black base for track rail three-phase.





LED-RAIL-CAP-DA-NER
8031414926237



Tappo per binario trifase nero.

Black cap for three-phase track rail.





LED-RAIL-S-1,5-DA-NER
8031414926398



Sistema sospensione 1,5 m per binari nero.

Black suspension 1,5 m for track rail.




LED-RAIL-S-3-DA-NER
8031414926411



Sistema sospensione 3 m per binari nero.

Black suspension 3 m for track rail.



RAIL

Binari ed accessori.
Track rail and components.

	<p>LED-RAIL-I-MINI-DA-BCO 8031414926282</p> <p>Connettore lineare mini bianco a scomparsa per sistema binari trifase.</p>	<p>White mini invisible connector for three-phase track rail system.</p> 
	<p>LED-RAIL-NEST-SX-DA-BCO 8031414926343</p> <p>Innesto bianco sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.</p>	<p>White recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.</p> 
	<p>LED-RAIL-NEST-DX-DA-BCO 8031414926367</p> <p>Innesto bianco destro per binari guida entrata L N + cavo di terra per circuito a trifase.</p>	<p>White recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.</p> 
	<p>LED-RAIL-I-DA-BCO 8031414926268</p> <p>Connettore bianco lineare per binari sistema trifase.</p>	<p>White straight connector for three-phase track rail system.</p> 
	<p>LED-RAIL-FLEX-DA-BCO 8031414926244</p> <p>Connettore bianco flessibile per sistema trifase.</p>	<p>White flexible power connector for three-phase track rail system.</p> 
	<p>LED-RAIL-X-DA-BCO 8031414926527</p> <p>Connettore a croce bianco per sistema trifase.</p>	<p>White cross connector for three-phase system.</p> 
	<p>LED-RAIL-L-DX-DA-BCO 8031414926329</p> <p>Connettore bianco track destro a L per binari guida trifase.</p>	<p>White L connector right side for three-phase track rail system.</p> 
	<p>LED-RAIL-L-SX-DA-BCO 8031414926305</p> <p>Connettore bianco track sinistro a L per binari guida trifase.</p>	<p>White L connector left side for three-phase track rail system.</p> 

	<p>LED-RAIL-I-MINI-DA-NER 8031414926299</p> <p>Connettore lineare mini nero a scomparsa per sistema binari trifase.</p>	<p>Black mini invisible connector for three phase track rail system.</p> <p></p>	
	<p>LED-RAIL-NEST-SX-DA-NER 8031414926350</p> <p>Innesto nero sinistro per binari guida entrata L N + cavo di terra per circuito a trifase.</p>	<p>Black recess power connector left side for three-phase track rail, L N input + ground cable for three-phase circuit.</p> <p></p>	
	<p>LED-RAIL-NEST-DX-DA-NER 8031414926374</p> <p>Innesto nero destro per binari guida entrata L N + cavo di terra per circuito a trifase.</p>	<p>Black recess power connector right side for three-phase track rail, L N input + ground cable for three-phase circuit.</p> <p></p>	
	<p>LED-RAIL-I-DA-NER 8031414926275</p> <p>Connettore nero lineare per binari sistema trifase.</p>	<p>Black straight connector for three-phase track rail system.</p> <p></p>	
	<p>LED-RAIL-FLEX-DA-NER 8031414926251</p> <p>Connettore nero flessibile per sistema trifase.</p>	<p>Black flexible power connector for three-phase track rail system.</p> <p></p>	
	<p>LED-RAIL-X-DA-NER 8031414926534</p> <p>Connettore a croce nero per sistema trifase.</p>	<p>Black cross connector for three-phase system.</p> <p></p>	
	<p>LED-RAIL-L-DX-DA-NER 8031414926336</p> <p>Connettore nero track destro a L per binari guida trifase.</p>	<p>Black L connector right side for three-phase track rail system.</p> <p></p>	
	<p>LED-RAIL-L-SX-DA-NER 8031414926312</p> <p>Connettore nero track sinistro a L per binari guida trifase.</p>	<p>Black L connector left side for three-phase track rail system.</p> <p></p>	

Trifase / Three-phase

RAIL

Binari ed accessori.

Track rail and components.



LED-RAIL-T-DX1-DA-BCO

8031414926480



Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Right white T connector for L N input guide rails + ground cable for three-phase system.

LED-RAIL-T-SX1-DA-BCO

8031414926466



Connettore bianco sinistro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Left white T connector for L N input guide rails + ground cable for three-phase system.

LED-RAIL-T-DX2-DA-BCO

8031414926503



Connettore bianco destro a T per binari guida entrata L N + cavo di terra per circuito trifase.

Right white T connector for L N input guide rails + ground cable for three-phase system.

LED-RAIL-T-SX2-DA-BCO

8031414926442



Connettore bianco a T per binari guida entrata L N + cavo di terra per circuito trifase.

White T connector for L N input guide rails + ground cable for three-phase circuit.




LED-RAIL-T-DX1-DA-NER
8031414926497




Connettore nero destro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Right black T connector
for L N input guide
rails + ground cable for
three-phase system.




LED-RAIL-T-SX1-DA-NER
8031414926473




Connettore nero sinistro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Left black T connector
for L N input guide
rails + ground cable for
three-phase system.




LED-RAIL-T-DX2-DA-NER
8031414926510




Connettore nero destro a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Right black T connector
for L N input guide
rails + ground cable for
three-phase system.




LED-RAIL-T-SX2-DA-NER
8031414926459













Connettore nero a T
per binari guida entrata
L N + cavo di terra
per circuito trifase.

Black T connector
for L N input guide
rails + ground cable for
three-phase circuit.




TRACK

Binari ed accessori.
Track rail and components.

	LED-TRACK-1M-INC 8031440361804	Binario trifase ad incasso in alluminio bianco 1 m.	Recessed track light in white aluminum 1 m.	
	LED-TRACK-2M-INC 8031440361811	Binario trifase ad incasso in alluminio bianco 2 m.	Recessed track light in white aluminum 2 m.	
	INC-TRACK-STAFFE 8031414879700	Kit 2pz staffe zincate per binario incasso	Kit 2pcs metal bracket for recessed track rail	
	INC-TRACK-NEST 8031414871193	Innesto sinistro per binario ad incasso trifase bianco.	White recess power connector left side for three-phase track rail.	
	INC-TRACK-NEST-R 8031414871179	Innesto destro per binario ad incasso trifase bianco.	White recess power connector right side for three-phase track rail in back version.	
	INC-TRACK-I 8031414871254	Connettore bianco lineare ad incasso per binari trifase.	White recess straight connection for three-phase track rail system.	
	INC-TRACK-L-R 8031414871216	Connettore bianco ad incasso destro a L per binari trifase.	White recess L connector right side for three-phase track rail system.	
	INC-TRACK-L 8031414871230	Connettore bianco ad incasso sinistro a L per binari trifase.	White recess L connector left side for three-phase track rail system.	

**LED-TRACK-1M-INC NERO**


8031414864836

Binario trifase ad incasso
in alluminio nero 1 m.Recessed track light in
black aluminum 1 m.**LED-TRACK-2M-INC NERO**


8031414864058

Binario trifase ad incasso
nero in alluminio 2 m.Recessed track light in
black aluminum 2 m.**INC-TRACK-STAFFE**

8031414879700

Kit 2pz staffe zincate
per binario incassoKit 2pcs metal bracket
for recessed track rail**INC-TRACK-NEST NERO**


8031414871209

Innesto sinistro per binario
ad incasso trifase nero.Black recess power
connector left side for
three-phase track rail.**INC-TRACK-NEST-R NERO**


8031414871186

Innesto destro per binario
ad incasso trifase nero.Black recess power
connector right side for
three-phase track rail
in back version.**INC-TRACK-I NERO**

8031414871261

Connettore nero lineare
ad incasso per binari trifase.Black recess straight
connection for three-phase
track rail system.**INC-TRACK-L-R NERO**

8031414871223


Connettore nero ad incasso
destro a L per binari trifase.Black recess L connector
right side for three-phase
track rail system.**INC-TRACK-L NERO**

8031414871247






Connettore nero ad incasso
sinistro a L per binari trifase.Black recess L connector
left side for three-phase
track rail system.

BUSBAR TRUNKING SYSTEM



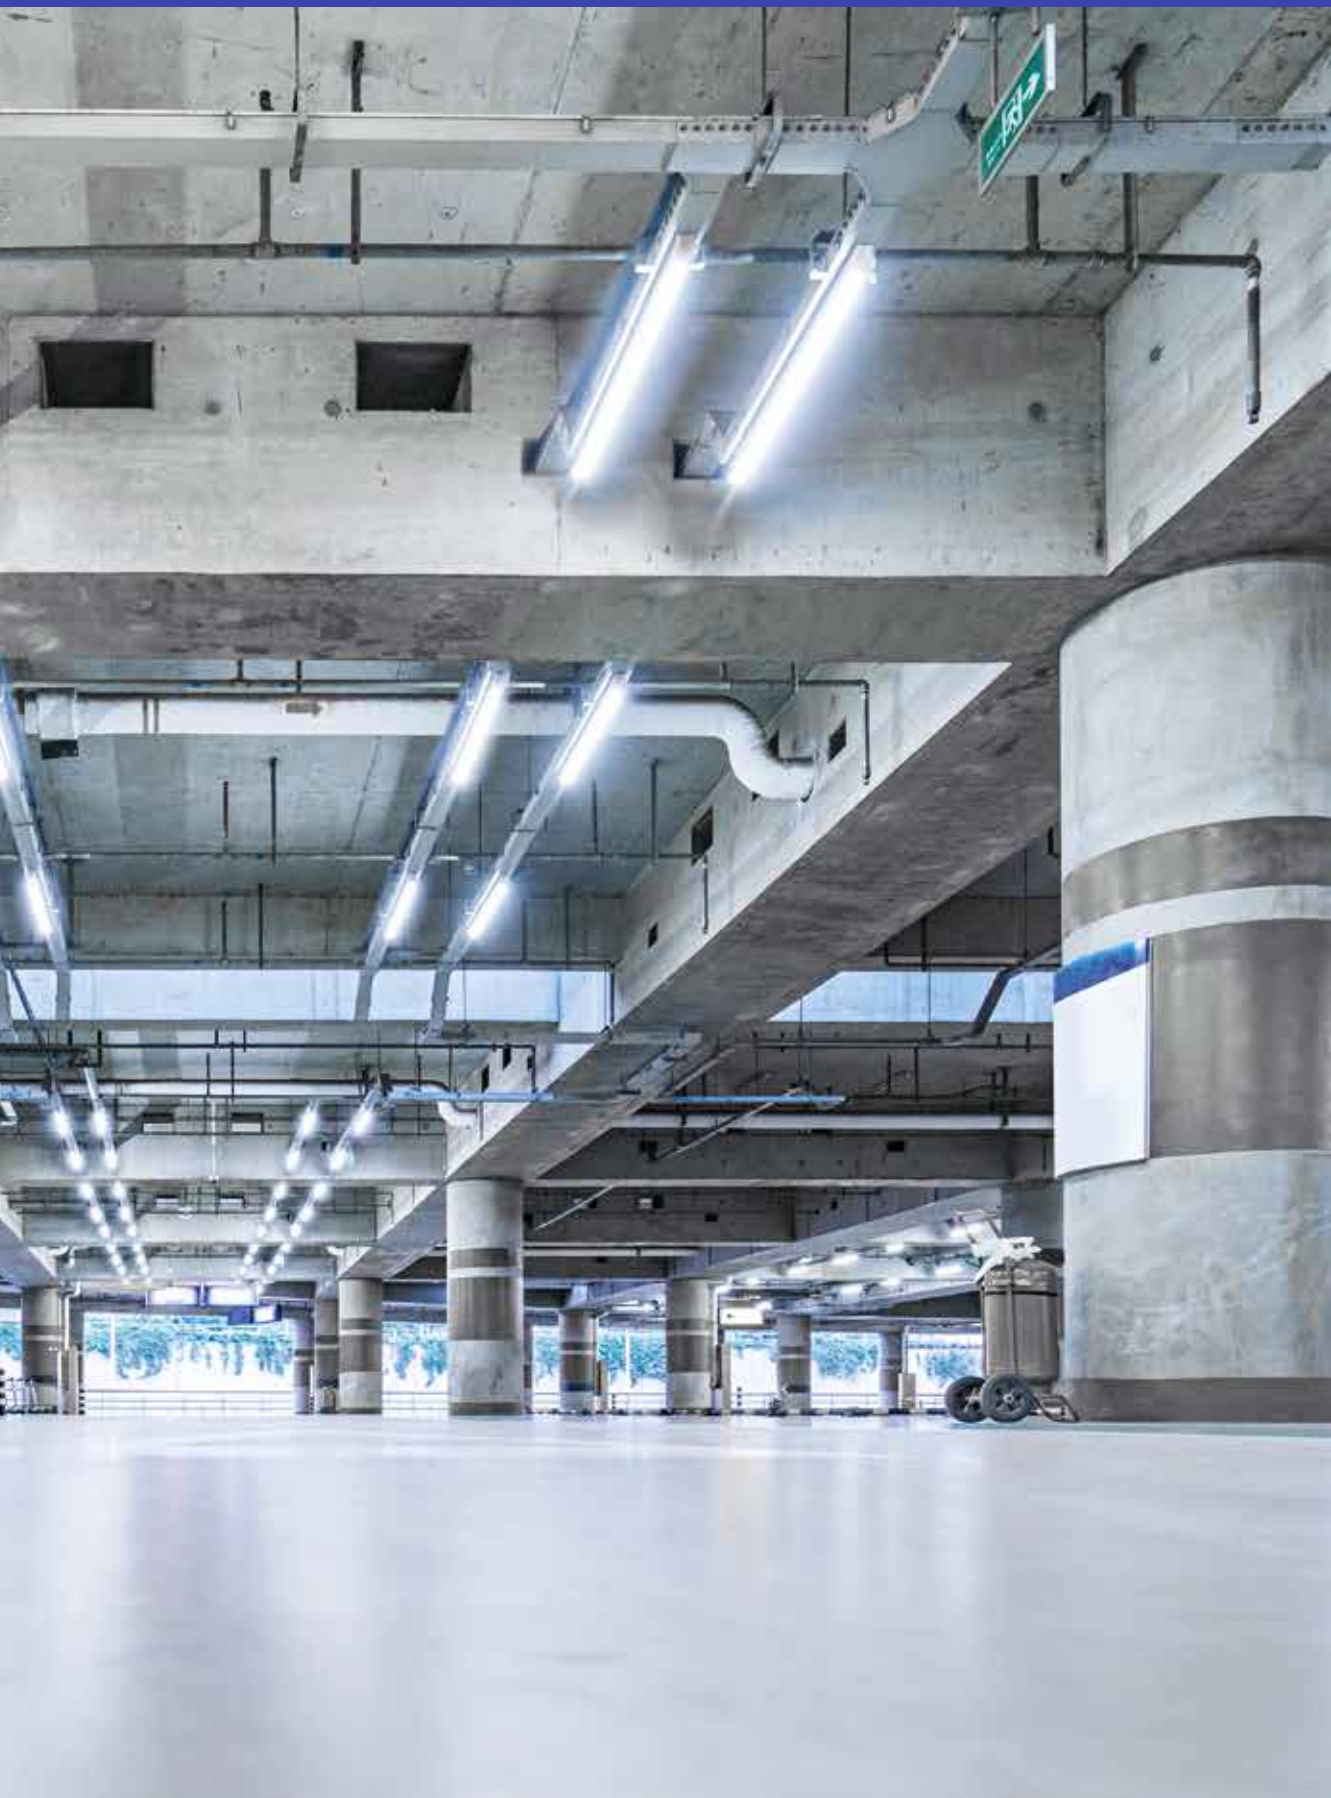


In.tec light **SISTEMA BINARI / TRACK LIGHTS**

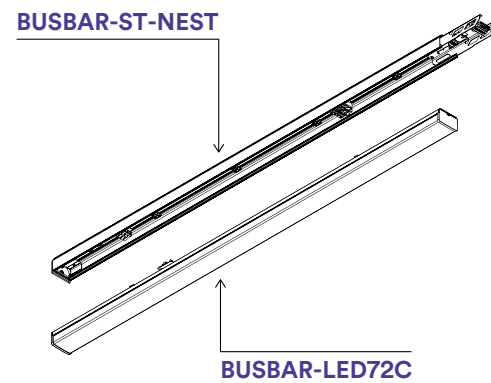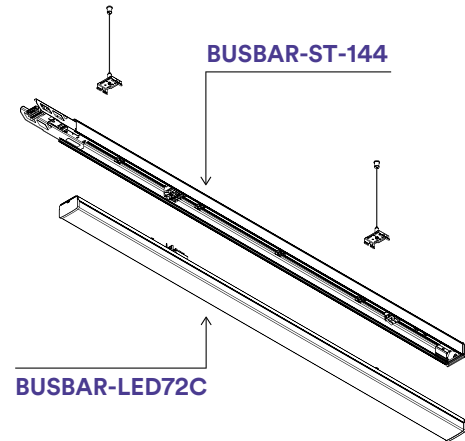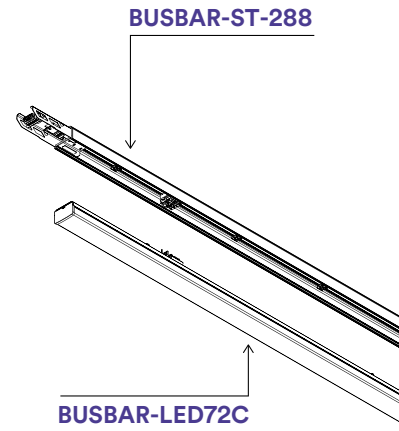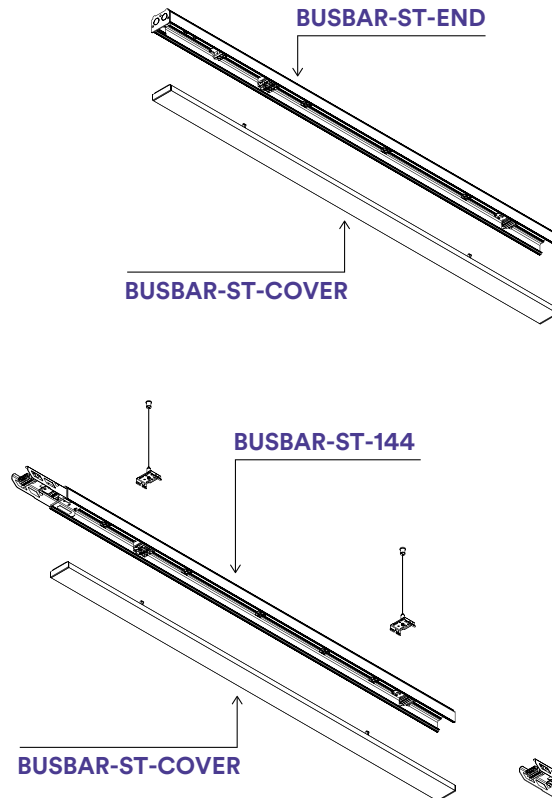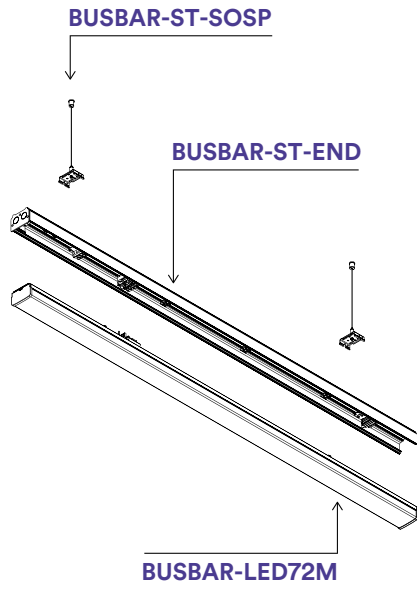

Schema di montaggio sistema binari.
Assembling technical sheet track rail system.


BUSBAR TRUNKING SYSTEM

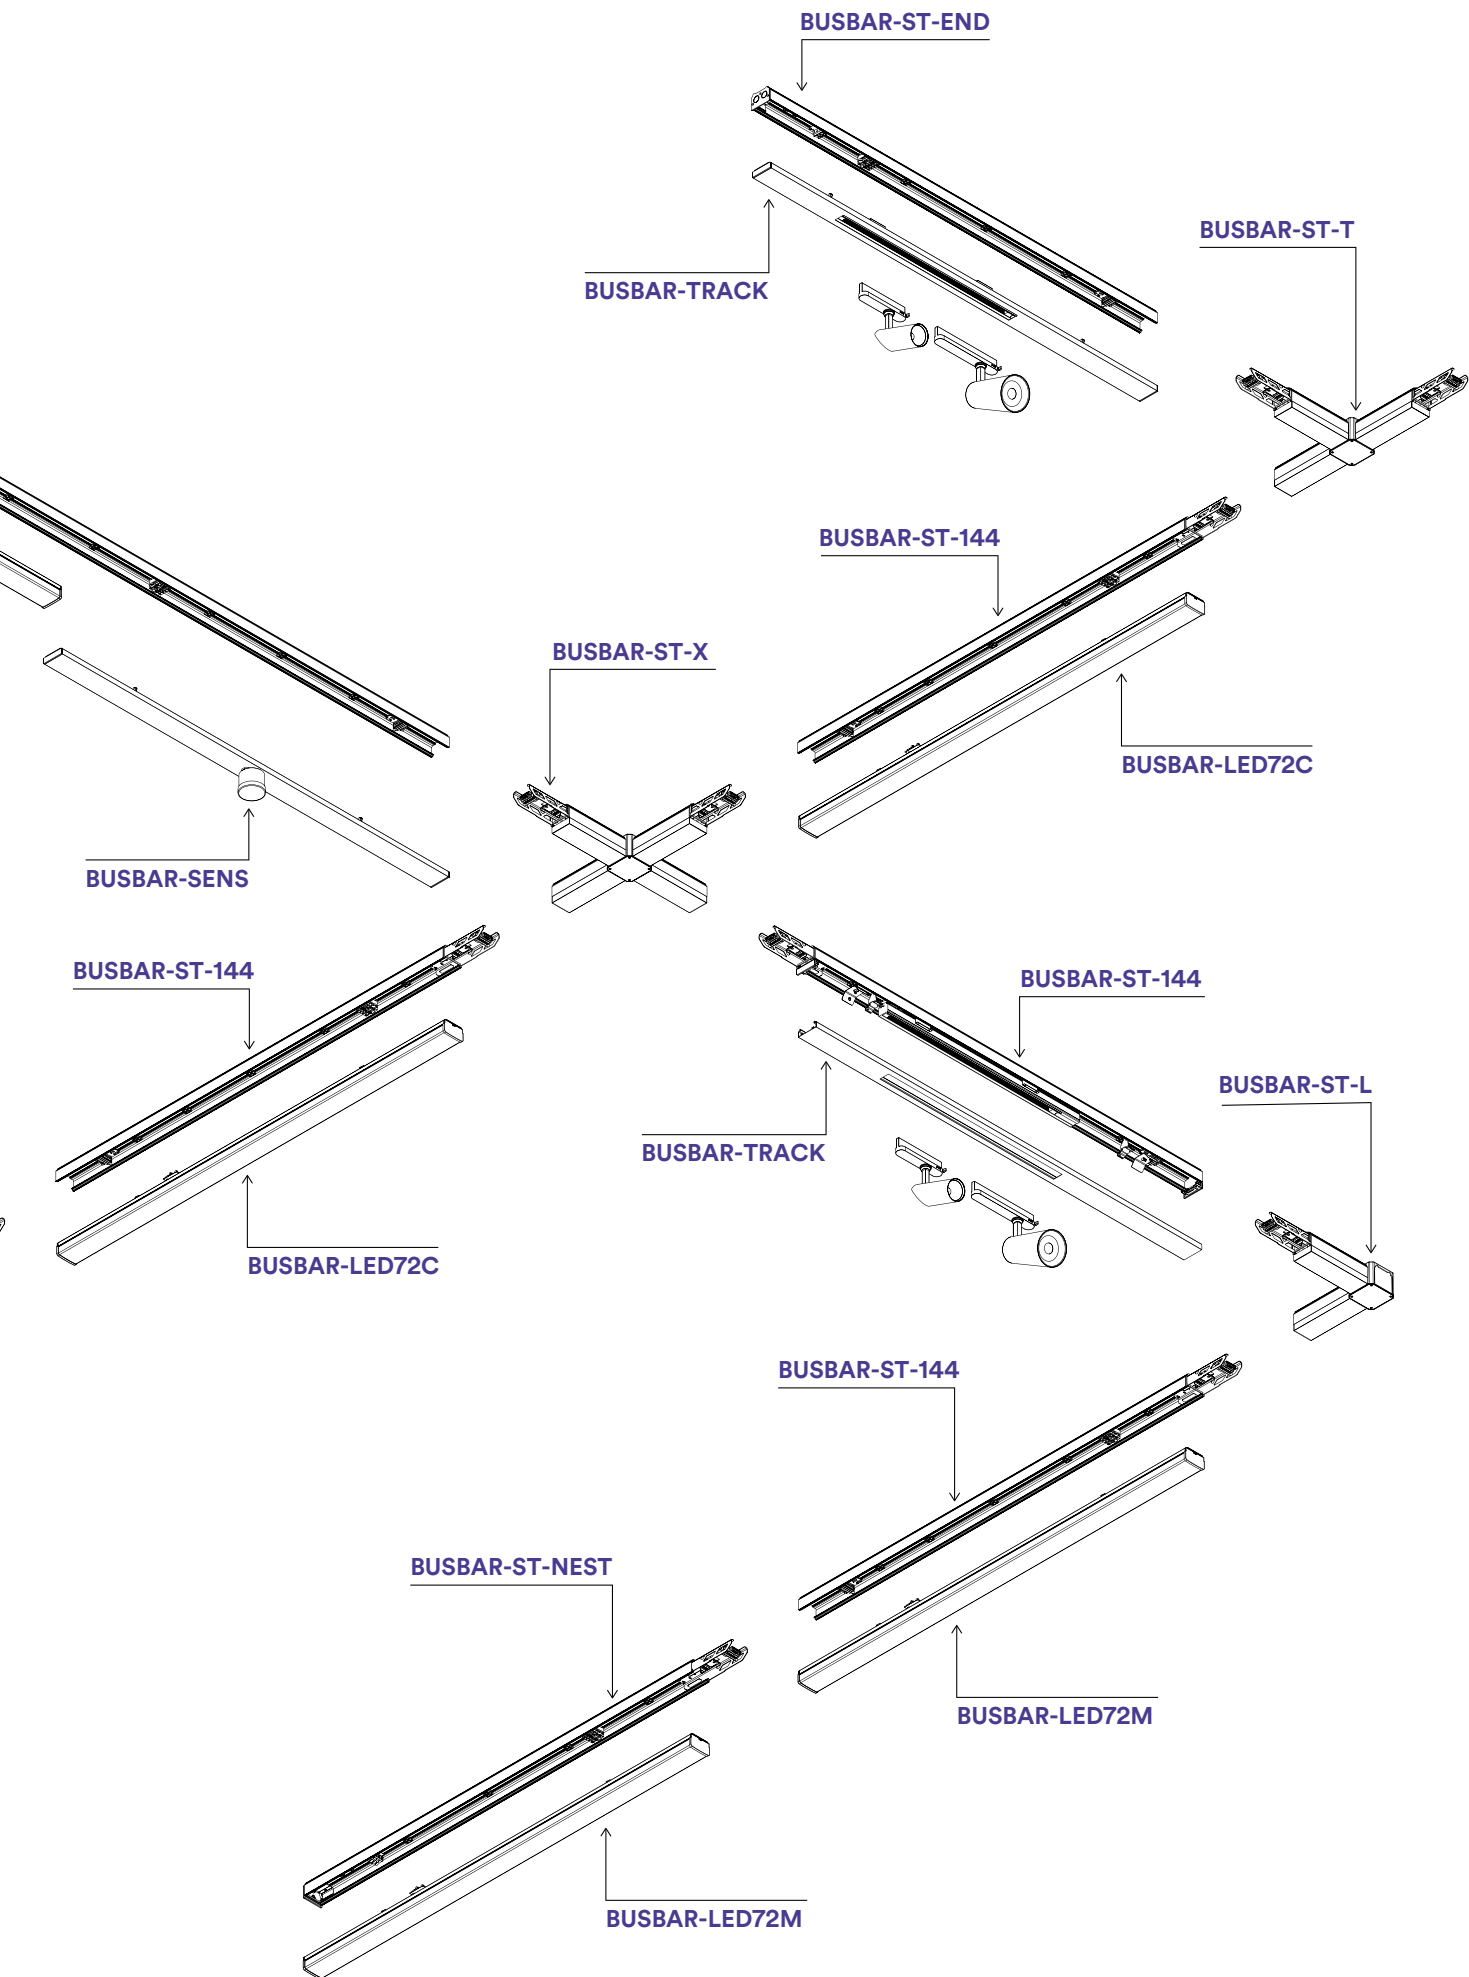

Trunking System

BUSBAR

Sistema trunking lineare.
Trunking linear system.

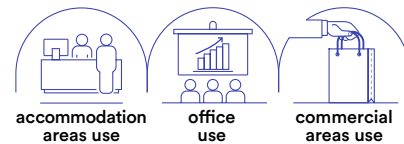

Materiale
alluminio

Colore
bianco



Temperatura colore
3000K / 4000K



Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour
white




Colour temperature
3000K / 4000K



Driver
built-in

Life time and on/off
50.000h
>25.000 on/off



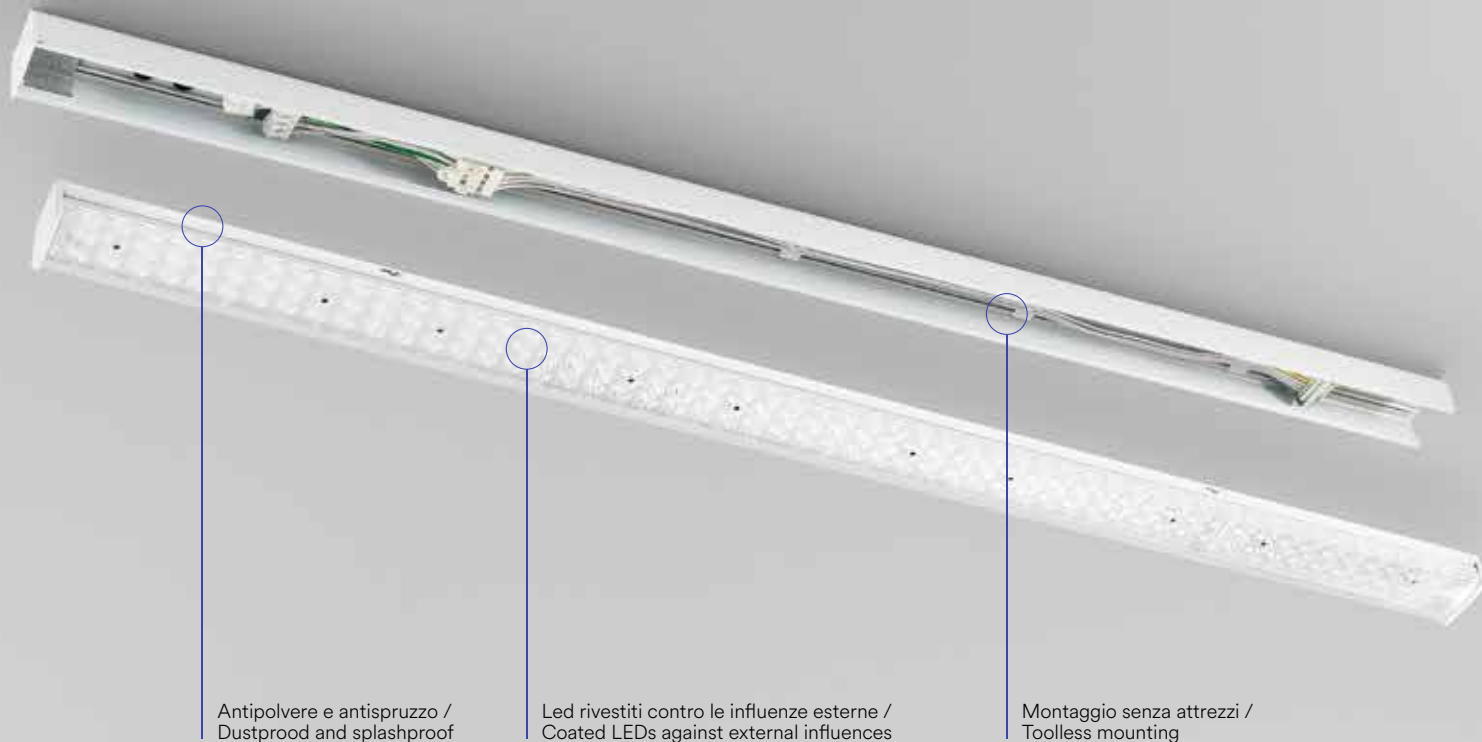

Antipolvere e antispruzzo /
Dustproof and splashproof

Led rivestiti contro le influenze esterne /
Coated LEDs against external influences

Montaggio senza attrezzi /
Toolless mounting



Sistema di fissaggio a soffitto o a sospensione
/ Ceiling mount or pendant fixing system



Estensibile grazie ai moduli in 2 misure
/ Extendable thanks to the extruded aluminum modules



Sistema easy di aggancio binari
/ Track rail easy connection system




7 cavi L1 L2 L3 N E D+ D- trifase più dimmer
/ 7 wire connection system L1 L2 L3 N E D+ D- three-phase + dimmer




Sistema easy di fissaggio della lampada
/ Lamp easy installation system

In.tec light **SISTEMA BINARI / TRACK LIGHTS**


Lenti per diversi fasci di luce / Different beam angles optional lens



Lente inclusa /
Included lens




Lente opzionale
doppio fascio luminoso 25°/
Optional lens double lens 25°

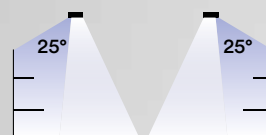

Lente opzionale
fascio di luce asimmetrico 25° sx-dx /
Optional lens asymmetric lens 25° sx-dx

Trunking System



BUSBAR

Lampada lineare per sistema trunking.
Linear lamp for trunking system.

Materiale
alluminio

Colore
bianco



Temperatura colore
3000K / 4000K



Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour
white



Colour temperature
3000K / 4000K



Driver
built-in

Life time and on/off
50.000h
>25.000 on/off





BUSBAR-LED72C

8031414883936

lumen 9340 lm


BUSBAR-LED72M

8031414883929

lumen 9340 lm

watt 72W

beam angle 90°




BUSBAR-LED72M-HELP

8031414898367

lumen 9340 lm


watt 72W



emergency light 3 h - 600 lm

watt 4W


beam angle 90°



Funzione MAINTAIN
sempre accesa /
MAINTAIN
function always on



Funzione NON-MAINTAIN
emergenza /
NON-MAINTAIN function
only emergency




Compatibile con altri sistemi trunking in commercio / Compatible with other trunking systems





Fotometria del prodotto / Photometric curve

Accessori non inclusi / Not included accessories



BUSBAR-LED72




BUSMAX-LENS-25

8031414884117

Lente per doppio fascio luminoso 25° /
Double lens 25°

Per tutta la lampada
BUSBAR occorrono 5 pezzi /
5 pieces need for the
whole **BUSBAR** lamp

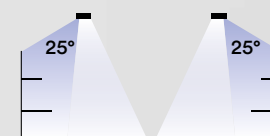

BUSMAX-LENS-RL

8031414884124

Lente fascio di luce asimmetrica 25° sx-dx /
Asymmetric lens 25° sx-dx

Per tutta la lampada
BUSBAR occorrono 5 pezzi /
5 pieces need for the
whole **BUSBAR** lamp


BUSBAR

Sistema blindosbarra lineare per installazione a sospensione e plafoniera.
Busways linear system bar for suspended installation and ceiling light.




BUSBAR-ST-NEST
8031414883943

Binario innesto
7 cavi per
alimentazione. Feed trunking
with 7 input wire.




BUSBAR-ST-END
8031414883950

Binario terminale
7 cavi con sistema
di connessione
multipla. Terminal track
rail 7 cables with
multiple connection
system.




BUSBAR-ST-144
8031414883967

Binario
intermedio 7 cavi
da 145 cm. Intermediate
trunking with 7
wire of 145 cm.




BUSBAR-ST-288
8031414883974

Binario
intermedio 7 cavi
da 290 cm. Intermediate
trunking with 7
wire of 290 cm.




BUSBAR-ST-L
8031414884087

Connettore a L
7 cavi. L connector
with 7 wires.




BUSBAR-ST-T
8031414884100

Connettore a T
7 cavi. T connector
with 7 wires.




BUSBAR-ST-X
8031414884094

Connettore a X
7 cavi. X connector
with 7 wires.



BUSBAR-ST-COVER
8031414883981

Cover di
alluminio bianco. White
aluminum cover.

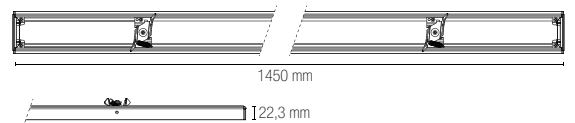

BUSBAR-SENS

1 / function




In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.

BUSBAR-SENS

2 / function



Se non viene rilevato movimento la lampada rimane ad un basso livello di luminosità.

If there is motion detected, the light will be remained at a low light level all the time.



Quando viene rilevato movimento, il sensore porta la lampada al 100% di luminosità.

When motion is detected, the sensor will switch on the light to 100% brightness.




Trascorso il tempo di attesa, il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento.

After elapse of hold time, the sensor dims the light at present low light level if no motion is detected.

BUSBAR-SENS

3 / function



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.




In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore attenua la luce all'attuale livello di luminosità se non è rilevato movimento.

After elapse of hold time, the sensor dims the light at present low light level if no motion is detected.



Trascorso il tempo di standby il sensore spegne la lampada se non è rilevato movimento.


After elapse of standby period, the sensor switches off the light if no motion is detected.

BUSBAR-SENS

8031414884131

Cover elettrificata con sensore di movimento e crepuscolare da 3 funzioni incluso.

Electrified cover with motion and dusk sensor. 3 functions sensor.

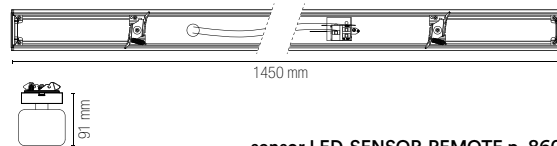


sensor LED-SENSOR-REMOTE p. 860

BUSBAR-TRACK

8031414884148

Cover elettrificata con binario trifase.

Electrified cover with three phase track system.

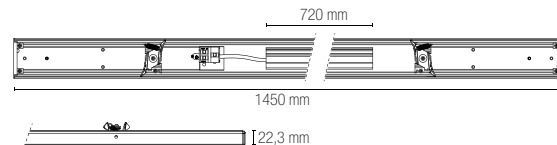

BUSBAR-FIX

8031414884155

Kit 2 pz staffe per fissaggio a plafoniera.

Bracket kit 2 pcs for ceiling mounting.



BUSBAR-ST-SOSP


8031414883998

Kit 2 pz cavi per binario a sospensione con cavo da 5 m.

Kit 2 pcs cables for suspension track with 5 m cable.



INDOOR

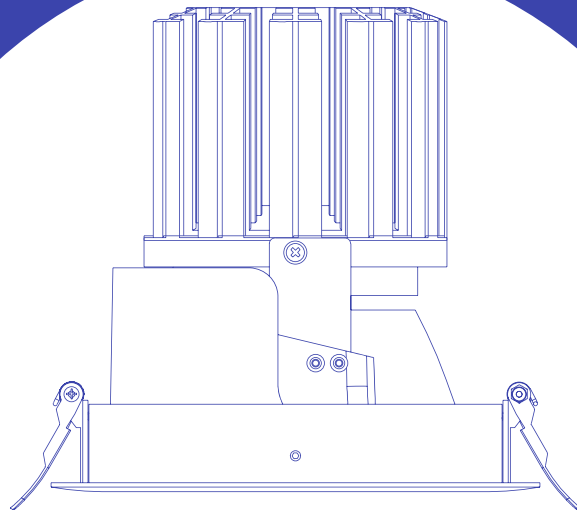


INCASSI
RECESSED LAMPS

APOLLO

Faretto ad incasso antiriflesso con struttura in alluminio e finitura con bordo bianco ed interno nero satinato. Luci spot con doppia orientabilità.

Anti-glare recessed spotlight with aluminum structure and finish with white border and satin black interior. Spot lights with double orientability.

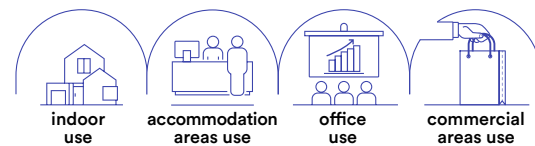

Materiale
alluminio

Colore

bordo bianco
e interno
nero satinato



Temperatura colore
3000K / 4000K



Driver
incluso

Material
aluminum

Colour

body with white
edge and
satin black internal




Colour temperature
3000K / 4000K





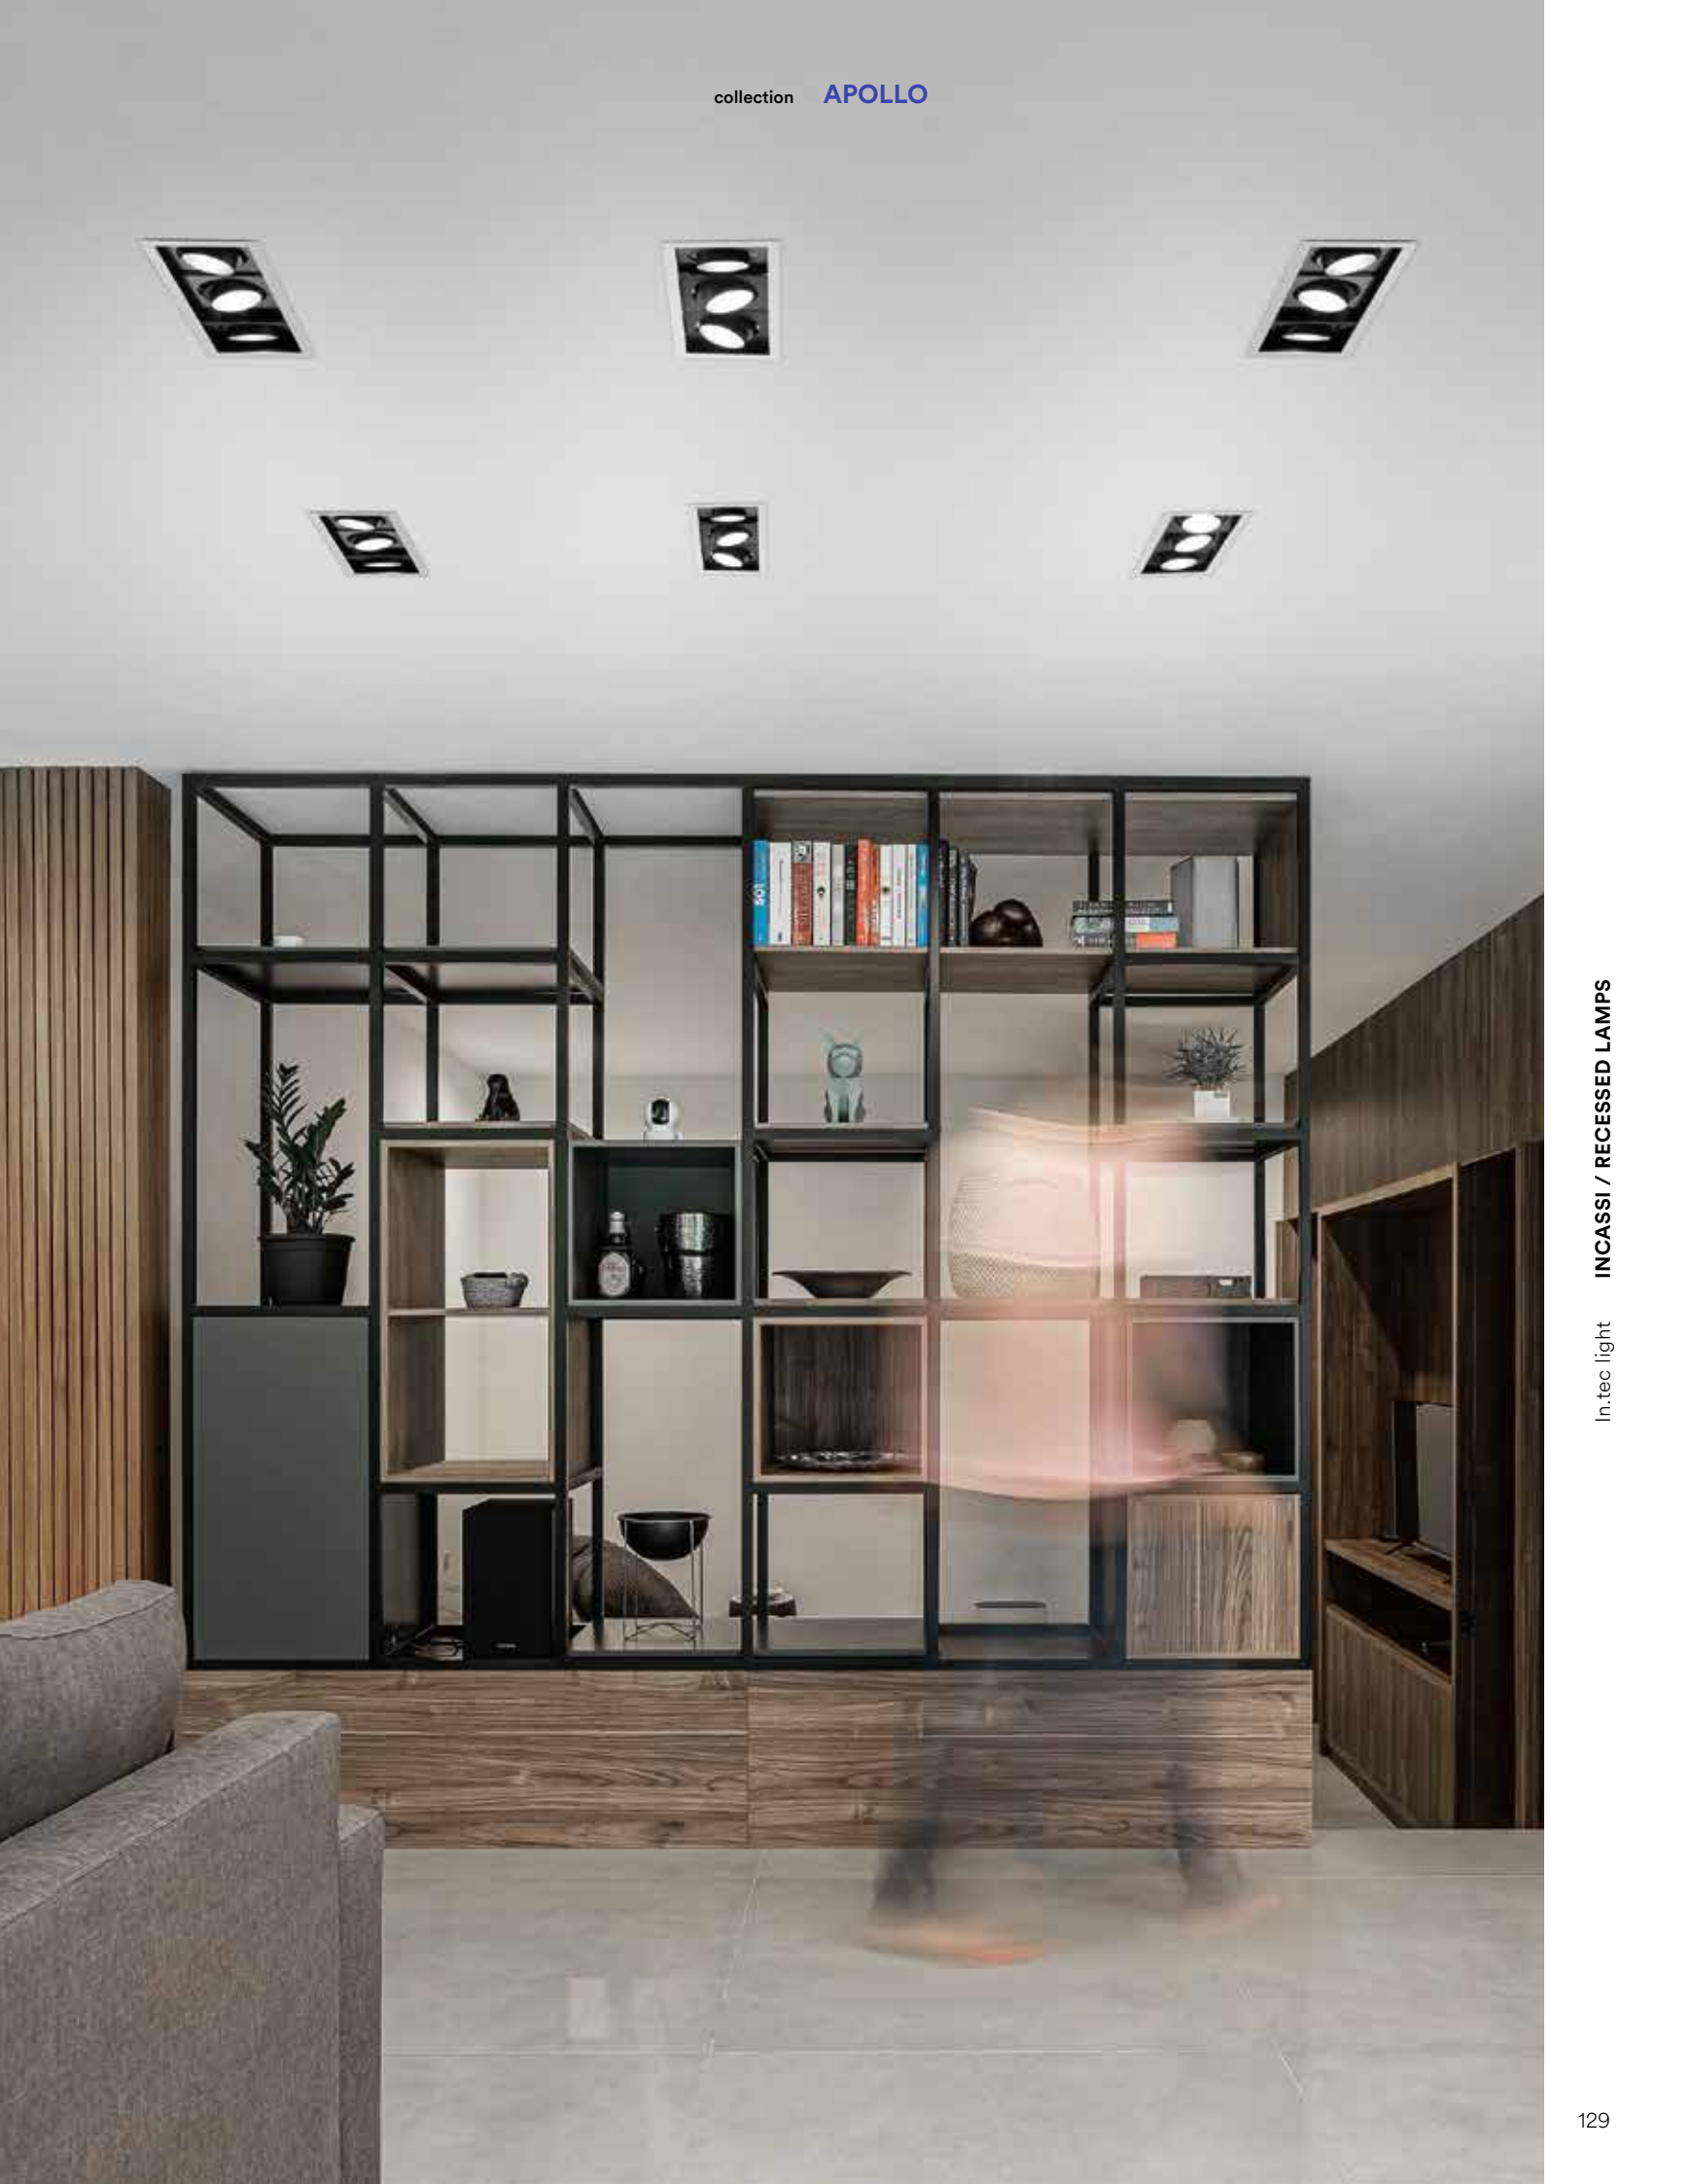


Driver
included











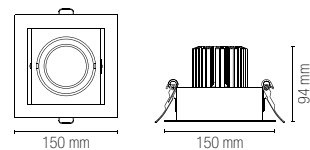
APOLLO

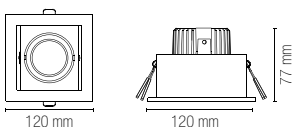






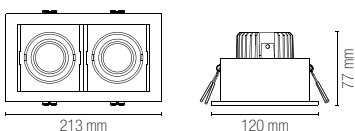
INC-APOLLO-1X10C 8031440360623	colour temp. 	colour 
lumen	1000 lm	
INC-APOLLO-1X10M 8031440360630	colour temp. 	colour 
lumen	1000 lm	
watt	1 × 10W	
beam angle	40°	
pf	-	
	100 × 100 mm	








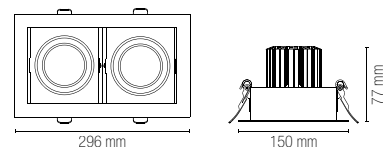
INC-APOLLO-1X20C 8031440360692	colour temp. 	colour 
lumen	2000 lm	
INC-APOLLO-1X20M 8031440360708	colour temp. 	colour 
lumen	2000 lm	
watt	1 × 20W	
beam angle	40°	
pf	-	
	125 × 125 mm	








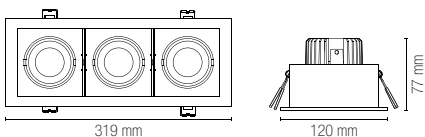
INC-APOLLO-2X10C 8031440360647	colour temp. 	colour 
lumen	2000 lm	
INC-APOLLO-2X10M 8031440360654	colour temp. 	colour 
lumen	2000 lm	
watt	2 × 10W	
beam angle	40°	
pf	-	
	190 × 100 mm	








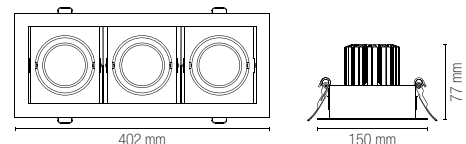
INC-APOLLO-2X20C 8031440360715	colour temp. 	colour 
lumen	4000 lm	
INC-APOLLO-2X20M 8031440360722	colour temp. 	colour 
lumen	4000 lm	
watt	2 × 20W	
beam angle	40°	
pf	-	
	245 × 125 mm	



INC-APOLLO-3X10C 8031440360661	colour temp. 	colour 
lumen	3000 lm	
INC-APOLLO-3X10M 8031440360678	colour temp. 	colour 
lumen	3000 lm	
watt	3 × 10W	
beam angle	40°	
pf	-	
	290 × 100 mm	



INC-APOLLO-3X20C 8031440360746	colour temp. 	colour 
lumen	6000 lm	
INC-APOLLO-3X20M 8031440360739	colour temp. 	colour 
lumen	6000 lm	
watt	3 × 20W	
beam angle	40°	
pf	-	
	355 × 125 mm	






INC-APOLLO-1X30C

8031440360753

lumen



2900 lm

INC-APOLLO-1X30M

8031440360760

lumen




2900 lm

watt 1 × 30W

beam angle 40°

pf 0.90


175 × 175 mm

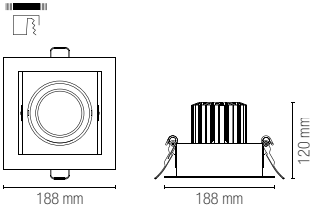

INC-APOLLO-1X45C

8031440360777

lumen




4500 lm

INC-APOLLO-1X45M

8031440360784

lumen




4500 lm

watt 1 × 45W


beam angle 40°

pf 0.90


175 × 175 mm

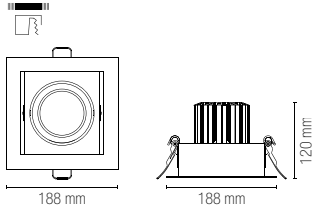


Fotometria del prodotto / Photometric curve




INC-APOLLO-1X10



INC-APOLLO-1X20



INC-APOLLO-1X30




INC-APOLLO-1X45

INC-APOLLO-2X30C

8031440360791

lumen



5800 lm

INC-APOLLO-2X30M

8031440360807

lumen




5800 lm

watt 2 × 30W

beam angle 40°

pf 0.90


320 × 175 mm

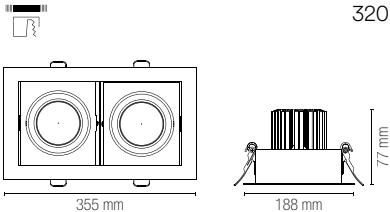

INC-APOLLO-2X45C

8031440360814

lumen



9000 lm

INC-APOLLO-2X45M

8031440360821

lumen





9000 lm

watt 2 × 45W


beam angle 40°

pf 0.90


320 × 175 mm

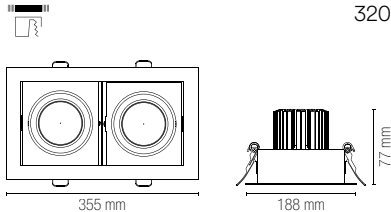


INC-APOLLO-2X10*



INC-APOLLO-2X20*



INC-APOLLO-2X30*




INC-APOLLO-2X45*

INC-APOLLO-3X30C

8031440360845

lumen



8700 lm

INC-APOLLO-3X30M

8031440360838

lumen




8700 lm

watt 3 × 30W

beam angle 40°

pf 0.90


475 × 175 mm

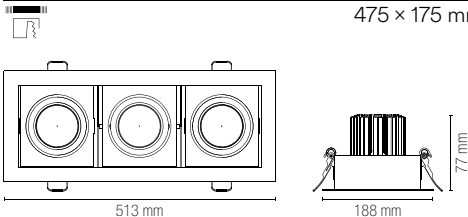

INC-APOLLO-3X45C

8031440360852

lumen



13500 lm

INC-APOLLO-3X45M

8031440360869

lumen





13500 lm

watt 3 × 45W


beam angle 40°

pf 0.90


475 × 175 mm

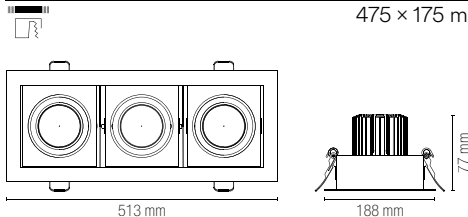


INC-APOLLO-3X10*



INC-APOLLO-3X20*



INC-APOLLO-3X30*




INC-APOLLO-3X45*

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element

OUTSIDER

Faretto ad incasso antiriflesso con struttura in alluminio, finitura bianco opaco e bordatura interna nera. Luci spot con testa estraibile e orientabile a 350°.

Anti-glare recessed spotlight with aluminum structure, matt white finish and black inner border. Spot lights with pull-out head and adjustable to 350°.

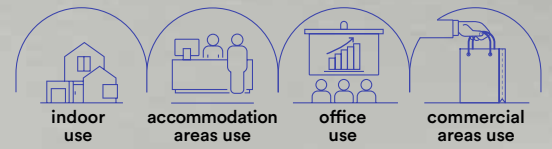

Materiale
alluminio

Colore

bianco opaco
con bordatura
interna nera



Temperatura colore
3000K / 4000K



Driver
incluso

Material
aluminum

Colour

matt white
color and black
internal ring



Colour temperature
3000K / 4000K








Driver
included









In.tec light **INCASSI / RECESSED LAMPS**


OUTSIDER









INC-OUTSIDER-1X15C 8031414864225	colour temp. 	colour 
lumen	1375 lm	
INC-OUTSIDER-1X15M 8031414864119	colour temp. 	colour 
lumen	1375 lm	
watt	1 x 15W	
beam angle	24°	
pf	-	
	90 x 90 x pr. 96 mm	

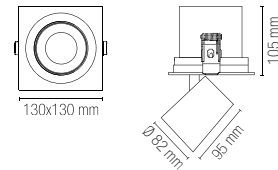






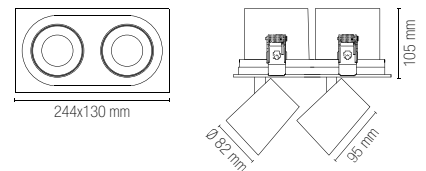
INC-OUTSIDER-1X30C 8031414864256	colour temp. 	colour 
lumen	3100 lm	
INC-OUTSIDER-1X30M 8031414864133	colour temp. 	colour 
lumen	3100 lm	
watt	1 x 30W	
beam angle	24°	
pf	0.90	
	116 x 116 x pr. 110 mm	

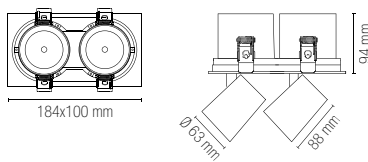







INC-OUTSIDER-2X15C 8031414864232	colour temp. 	colour 
lumen	2750 lm	
INC-OUTSIDER-2X15M 8031414864126	colour temp. 	colour 
lumen	2750 lm	
watt	2 x 15W	
beam angle	24°	
pf	-	
	174 x 90 x pr. 96 mm	








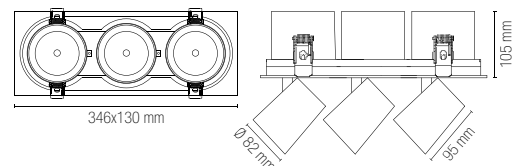
INC-OUTSIDER-2X30C 8031414864263	colour temp. 	colour 
lumen	6200 lm	
INC-OUTSIDER-2X30M 8031414864140	colour temp. 	colour 
lumen	6200 lm	
watt	2 x 30W	
beam angle	24°	
pf	0.90	
	230 x 116 x pr. 110 mm	

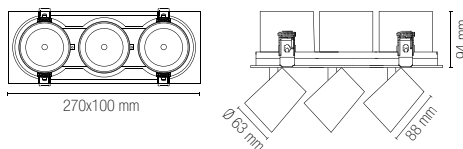


INC-OUTSIDER-3X15C 8031414864249	colour temp. 	colour 
lumen	4125 lm	
INC-OUTSIDER-3X15M 8031414864102	colour temp. 	colour 
lumen	4125 lm	
watt	3 x 15W	
beam angle	24°	
pf	-	
	260 x 90 x pr. 96 mm	




INC-OUTSIDER-3X30C 8031414864270	colour temp. 	colour 
lumen	9300 lm	
INC-OUTSIDER-3X30M 8031414864157	colour temp. 	colour 
lumen	9300 lm	
watt	3 x 30W	
beam angle	24°	
pf	0.90	
	335 x 116 x pr. 110 mm	




Fotometria del prodotto / Photometric curve




INC-OUTSIDER-1X15




INC-OUTSIDER-1X30




INC-OUTSIDER-2X15



INC-OUTSIDER-2X30



INC-OUTSIDER-3X15



INC-OUTSIDER-3X30



In.tec light **INCASSI / RECESSED LAMPS**

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curves represent the single module of each element

DELTA INC

Faretto ad incasso antiriflesso con struttura in alluminio, finitura bianco satinato e riflettore silver. Luci spot con testa estraibile e orientabile. Disponibile anche nella colorazione per la linea food.

Anti-glare recessed spotlight with aluminum structure, satin white finish and silver reflector. Spot lights with removable and adjustable head. Also available for lighting food line.

Materiale

alluminio

Colore

bianco satinato
e riflettore silver



**Temperatura colore
selezionabile**

3000K / 4000K / 6500K



Driver

incluso

Material

aluminum

Colour

satin white and
silver reflector



**Selectable color
temperature**

3000K / 4000K / 6500K



Driver

included






INC-DELTA-38DA
8031414923786
lumen

colour temp.	colour

6080 lm

watt	38W
beam angle	60°
pf	0.90
	Ø 160 mm

Fotometria del prodotto / Photometric curve



INC-DELTA-38




INC-DELTA-38 INC
8031414893546
lumen

colour temp.	colour

4300 lm

watt	38W
beam angle	60°
pf	0.90
	Ø 160 mm



Illuminazione per generi alimentari / Food lighting



INC-DELTA-38BR
8031414924226
lumen
K
CRI

colour temp.	colour

6080 lm
2500 K
>90

INC-DELTA-38RM
8031414924233
lumen
K
CRI

colour temp.	colour

6080 lm
3100 K
>70

INC-DELTA-38FM
8031414924240
lumen
K
CRI

colour temp.	colour

6080 lm
3000 K
>63

INC-DELTA-38FR
8031414924257
lumen
K
CRI

colour temp.	colour

6080 lm
3000 K
>93

watt	30W
beam angle	24°
pf	0.90
	Ø 150 mm

LYBRA

Faretto ad incasso rettangolare con struttura in alluminio e finitura in bianco satinato.

Diffusore con orientabilità verticale.

Rectangular recessed spotlight with aluminum structure and satin white finish.

Diffuser with vertical orientability.



Materiale

alluminio + PC

Colore

bianco satinato



Temperatura colore selezionabile

3000K / 4000K / 6500K



Driver

incluso

Material

aluminum + PC

Colour

satin white



Selectable color temperature

3000K / 4000K / 6500K




Driver


included




Fotometria del prodotto / Photometric curve



INC-LYBRA-38




	colour temp.	colour
INC-LYBRA-38		
8031414893553		
lumen	4400 lm	
watt	38W	
beam angle	120°	
pf	0.90	
	220 × 140 mm	

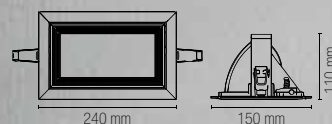

DAMA

Faretto da incasso con struttura in policarbonato e doppia ghiera intercambiabile rotonda e quadrata. Disponibile in bianco o nero.

Recessed light with polycarbonate structure and double interchangeable ring round or square. Available in black or white colors.

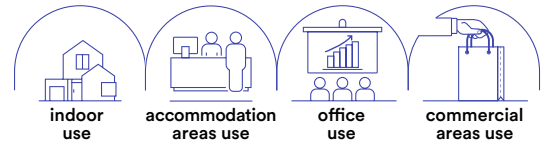

Materiale

PC

Colore

bianco
nero



Temperatura colore

4000K



Driver

incluso

Material

PC

Colour

white
black



Colour temperature

4000K



Driver


included



INCASSI / RECESSED LAMPS

In.tec light

Fotometria del prodotto / Photometric curve



INC-DAMA-QR44



INC-DAMA-QR44-BCO

8031414881581

lumen

colour temp.



300 lm

INC-DAMA-QR44-NER

8031414881598

lumen



300 lm

watt




LED 3W

beam angle

100°




Ø 35 mm



FIBRA OTTICA





Kit fibra ottica.
Fiber optic kit.



Materiale

fibra ottica
traslucente

Temperatura colore

RGB + 4000K



Material

translucent
optical fiber

Colour temperature

RGB + 4000K




LED-OPTICAL-200

8031414925131

200 fiber of Ø 1mm

Starry sky




LED-OPTICAL-500

8031414925148

500 fiber of Ø 0,75mm

Side glow



LED-OPTICAL-ENG

8031414925155


change color

DC12V + Adaptor 220V

colour
temp.



RGBW



16W

LED-OPTICAL-ENG-TW

8031414925162


Change color twinkle effect

DC12V + Adaptor 220V

colour
temp.




RGBW



16W

STARLIGHT STARLIGHT30



STARLIGHT

Materiale
alluminio

Colore
bianco, argento



Temperatura colore
4000K / BLU



Driver
non incluso

Material
aluminum

Colour
white, silver



Colour temperature
4000K / BLU



Driver
not included

STARLIGHT 30

Materiale
alluminio

Colore
bianco, argento



Temperatura colore
4000K



Driver
12V DC 100mA 6W

Material
aluminum

Colour
white, silver



Colour temperature
4000K



Driver
12V DC 100mA 6W





STARLIGHT

Connessione in parallelo / Parallel connection




Mini faretto a incasso cielo stellato con struttura in alluminio e doppia ghiera di colore bianco o silver intercambiabile.

Downlight for decorative starlight with aluminum structure and double interchangeable ring color white or silver.

	colour temp.	colour
LED-STARLIGHT-W 8031440361682		
lumen	11 lm	
LED-STARLIGHT-BLU 8031440361699		
	blu	

with 1 m. cable
watt

LED 0,2W



Accessori inclusi / Included accessories



Ghiera bianca intercambiabile /
White changeable ring



Ghiera silver intercambiabile /
Silver changeable ring

Accessori non inclusi / Not included accessories



LED-STARLIGHT-NEX
8031440364430

Scatola connessione per 10 teste 12V DC 1A incl. Cavo 1m. /
Box connection for 10 pcs 12V DC 1A with 1m. cable



LED-STARLIGHT-CONN
8031440364843


Connettore con singola entrata
3 uscite per kit cielo stellato
12V DC 1A incl. Cavo 1m. /
Connector one input three
output for starlight 12V
DC 1A with 1m. cable



LED-STARLIGHT-DR
8031440364447

Driver 12V DC 100mA
6W incl. Cavo 1m. /
Driver 12V DC 100mA
6W incl. 1m. cable

Fotometria del prodotto / Photometric curve



LED-STARLIGHT 0,2W

STARLIGHT 30




Kit 30 mini faretto a incasso cielo stellato con struttura in alluminio e doppia ghiera di colore bianco o silver intercambiabile.

Kit 30 downlight for decorative starlight with aluminum structure and double interchangeable ring color white or silver.

	colour temp.	colour
LED-STARLIGHT-30-W 8031440357692		
lumen	11 lm x 30	
with 1 m. cable		
watt		

LED 30 x 0,2W



Accessori inclusi / Included accessories



Ghiera bianca intercambiabile /
White changeable ring



Ghiera silver intercambiabile /
Silver changeable ring



3 Scatole connessione per 10 teste
12V DC 1A incl. cavo 1m. /
3 Boxes connection for 10 pcs
12V DC 1A with 1m. cable




1 Connettore con singola entrata
3 uscite per kit cielo stellato
12V DC 1A incl. cavo 1m. /
1 Connector one input three
output for starlight
12V DC 1A with 1m. cable



1 Driver 12V DC 100mA
6W incl. Cavo 1m. /
1 Driver 12V DC 100mA
6W incl. 1m. cable

Fotometria del prodotto / Photometric curve




LED-STARLIGHT 0,2W

ASSO KIT 3

Kit 3 faretti da incasso con struttura in alluminio disponibile nella versione silver quadrata o rotonda.

Kit 3 recessed spotlights with aluminum structure available in silver square or round.

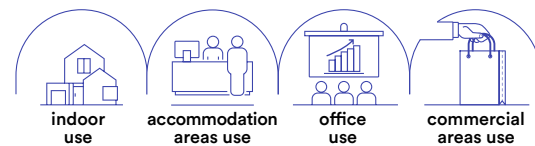

Materiale

alluminio

Colore

argento



Temperatura colore

4000K



Driver

230V incluso

Material

aluminum

Colour

silver




Colour temperature

4000K



Driver

230V included

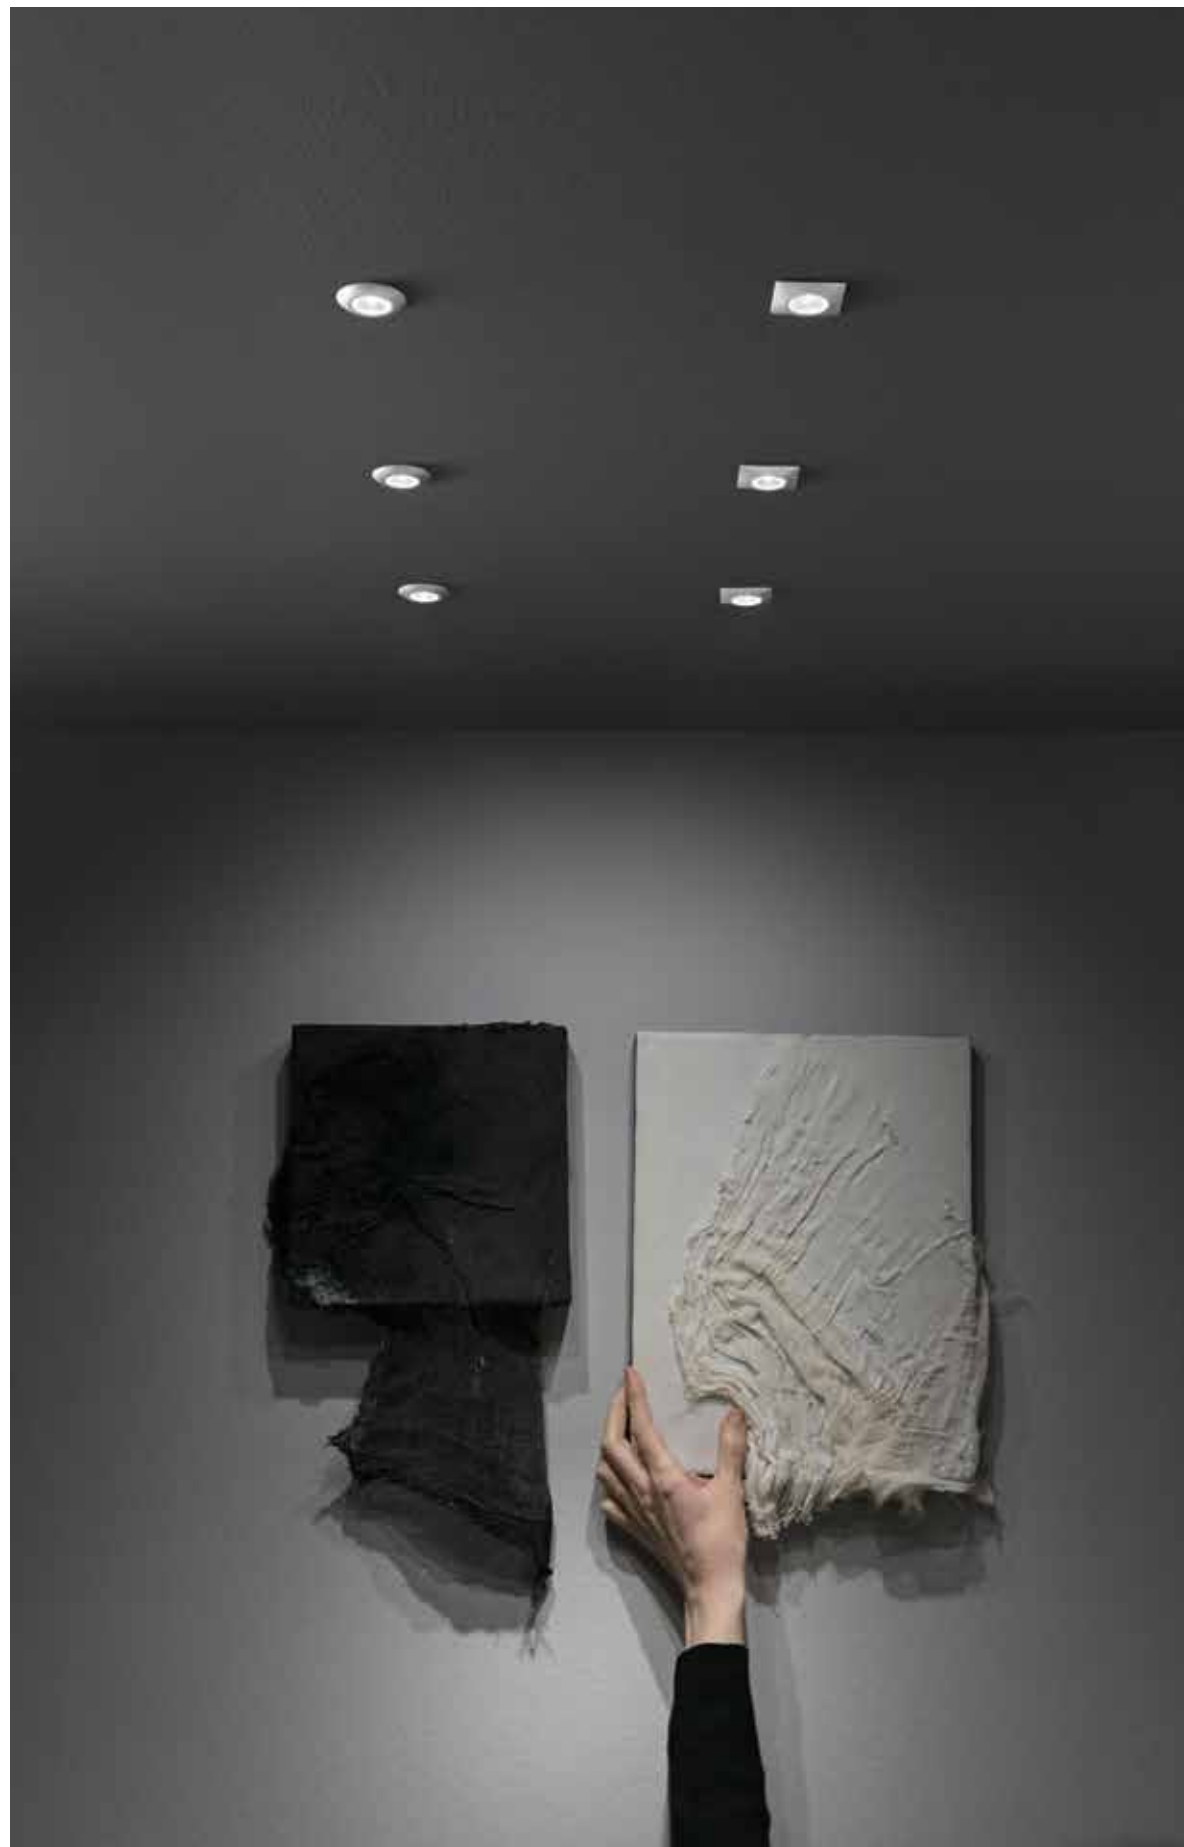



Kit 3 pz / Kit 3 pcs



INC-ASSO-Q3
8031414881628
lumen

colour temp.	colour
3x100 lm	



watt	LED 1,2 W
beam angle	30°
	Ø 25 mm




Kit 3 pz / Kit 3 pcs



INC-ASSO-R3
8031414881611
lumen


colour temp.	colour
3x100 lm	





watt	LED 1,2 W
beam angle	30°
	Ø 25 mm



Fotometria del prodotto / Photometric curve

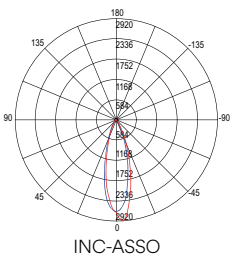


Accessori inclusi / Included accessories

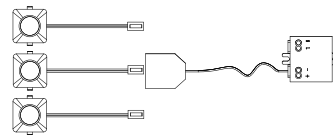

ASSO

Faretto da incasso con struttura in alluminio disponibile in bianco nero nella forma quadrata o rotonda.

Recessed spotlight with aluminum structure available in black white in square or round shape.

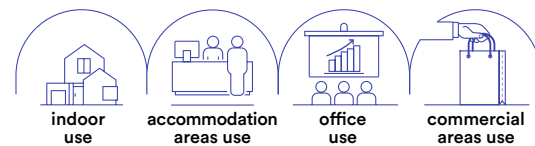

Materiale

alluminio

Colore

bianco
nero



Temperatura colore

3000K / 4000K / BLU



Driver

DC 24V
tensione costante
non incluso

Material

aluminum

Colour

white
black



Colour temperature

3000K / 4000K



Driver

DC 24V
constant voltage
not included





1 pz / 1 pcs



INC-ASSO-Q30C

8031414881642

lumen

colour temp. | colour

100 lm

INC-ASSO-Q30M

8031414881659


lumen

100 lm

watt LED 1,2 W

beam angle 30°

Ø 25 mm



1 pz / 1 pcs



INC-ASSO-Q30C-NER

8031414881666

lumen

colour temp. | colour

100 lm

INC-ASSO-Q30M-NER

8031414881673


lumen

100 lm

watt LED 1,2 W

beam angle 30°

Ø 25 mm



1 pz / 1 pcs



INC-ASSO-R30C

8031414877829

lumen

colour temp. | colour

100 lm

INC-ASSO-R30M

8031414877928

lumen

100 lm

INC-ASSO-R30-BLU


8031414877935

blu

watt LED 1,2 W

beam angle 30°

Ø 25 mm



1 pz / 1 pcs



INC-ASSO-R30C-NER

8031414881635

lumen

colour temp. | colour

100 lm

INC-ASSO-R30M-NER

8031414881680


lumen

100 lm


watt LED 1,2 W

beam angle 30°

Ø 25 mm




Fotometria del prodotto / Photometric curve




INC-ASSO

Accessori inclusi / Included accessories



cable 100 cm



Connessione in parallelo / Parallel connection system


Driver p. 843-852

Controller pag. 854-857

DOT

**Faretto da incasso con struttura
in alluminio disponibile in bianco nero.**

Recessed spotlight with aluminum
structure available in black or white.

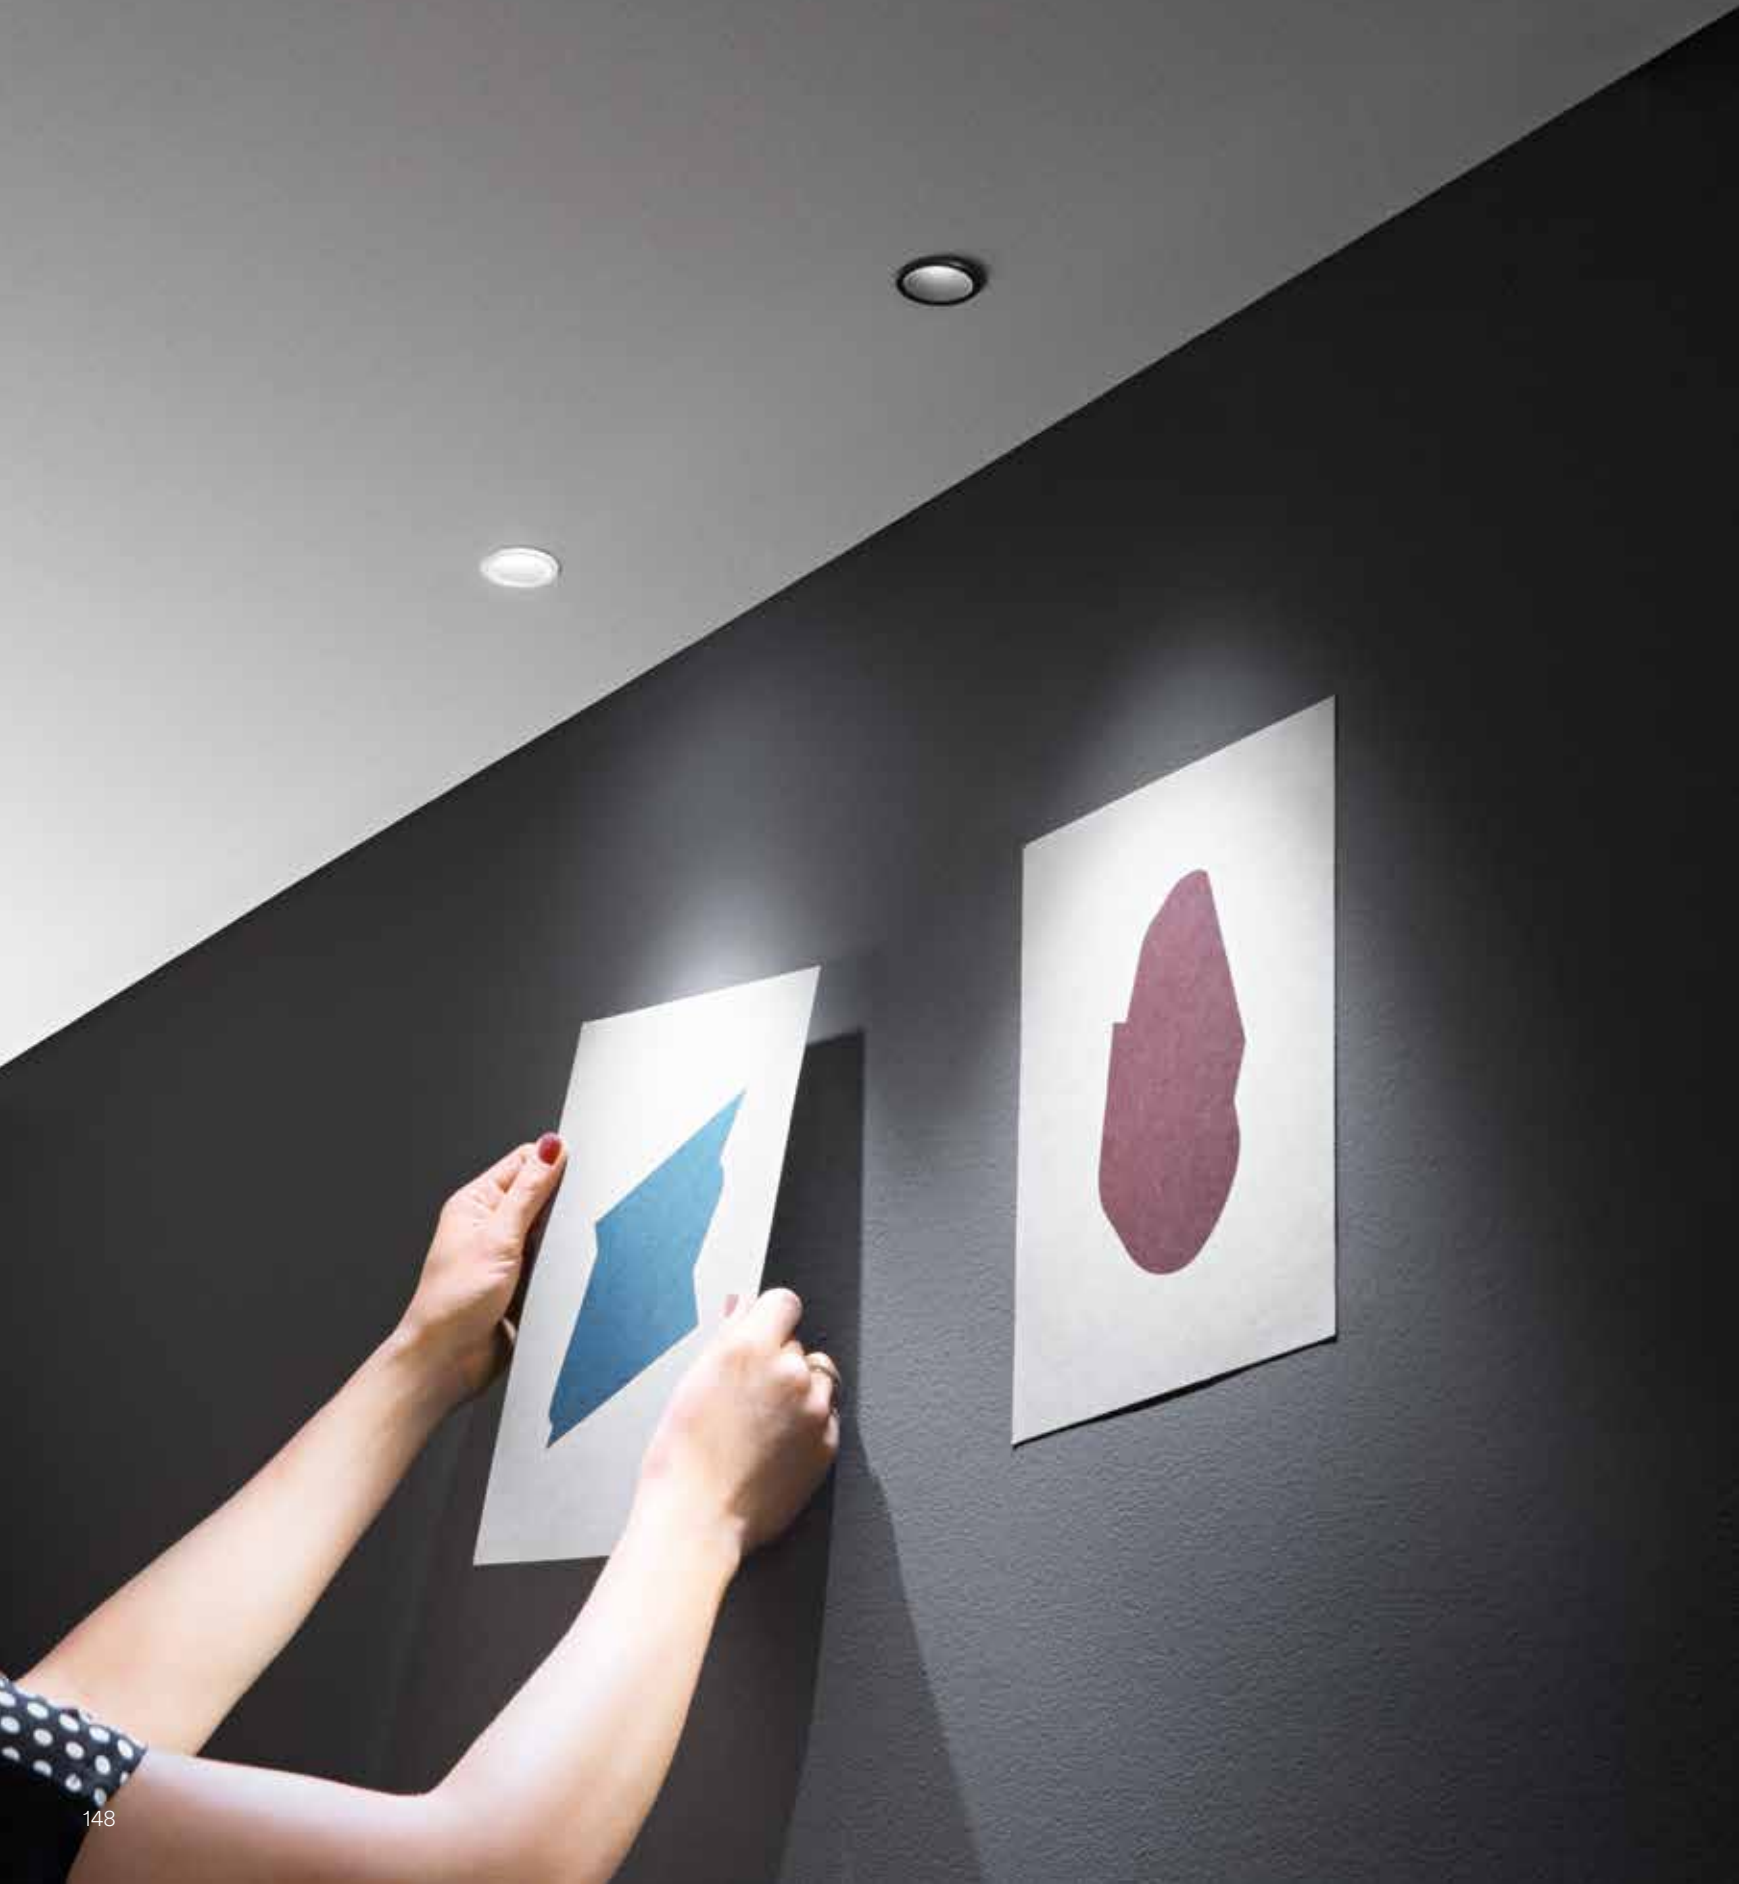

Materiale
alluminio + PC

Colore
bianco satinato
nero satinato



Temperatura colore selezionabile
3000K / 4000K / 6500K



Driver
incluso

Material
aluminum + PC

Colour
satin white
satin black




Selectable color temperature
3000K / 4000K / 6500K



Driver
included



Fotometria del prodotto /
Photometric curve



INC-DOT-R5



INC-DOT-R5DA-BCO

8031414923793

lumen

colour temp. | colour



600 lm

INC-DOT-R5DA-NER

8031414923809

lumen



600 lm

watt 5W

beam angle 24°

Ø 37 mm



INC-DOT-R5-BCO

8031414893584

lumen




480 lm

INC-DOT-R5-NER

8031414893614

lumen




480 lm

watt 5W

beam angle 24°


Ø 37 mm



HYDE

Faretto da incasso con struttura
in alluminio disponibile in bianco nero.

Recessed spotlight with aluminum
structure available in black or white.

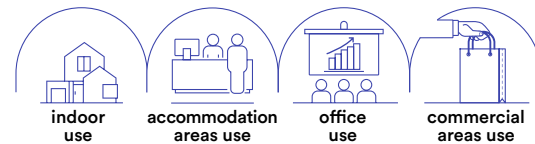

Materiale

alluminio + PC

Colore

bianco satinato
nero satinato



**Temperatura colore
selezionabile**

2700K / 3000K / 4000K / 6500K



Driver

incluso

Material

aluminum + PC

Colour

satin white
satin black



**Selectable color
temperature**

2700K / 3000K / 4000K / 6500K



Driver

included






INC-HYDE-BCO

8031414893560

lumen

colour temp.




750 lm

watt 8W

beam angle 60°

Ø 70 mm




INC-HYDE-NER

8031414893577

lumen

colour temp.




750 lm


watt 8W

beam angle 60°

Ø 70 mm



Fotometria del prodotto / Photometric curve




INC-HYDE

SINKRO

Faretto da incasso lineare antiriflesso con struttura in alluminio pressofuso, finitura con bordo bianco e interno nero lucido.

Anti-glare linear recessed spotlight with die-cast aluminum structure, finish with white border and glossy black interior.

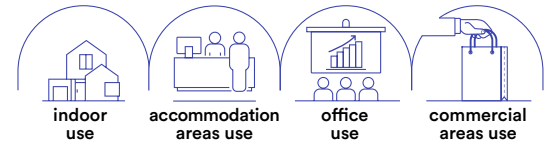

Materiale

alluminio pressofuso

Colore

bordo bianco e
interno nero lucido



Temperatura colore

4000K



Driver

incluso

Material

die cast aluminum

Colour

white and glossy
black inside




Colour temperature

4000K



Driver

included

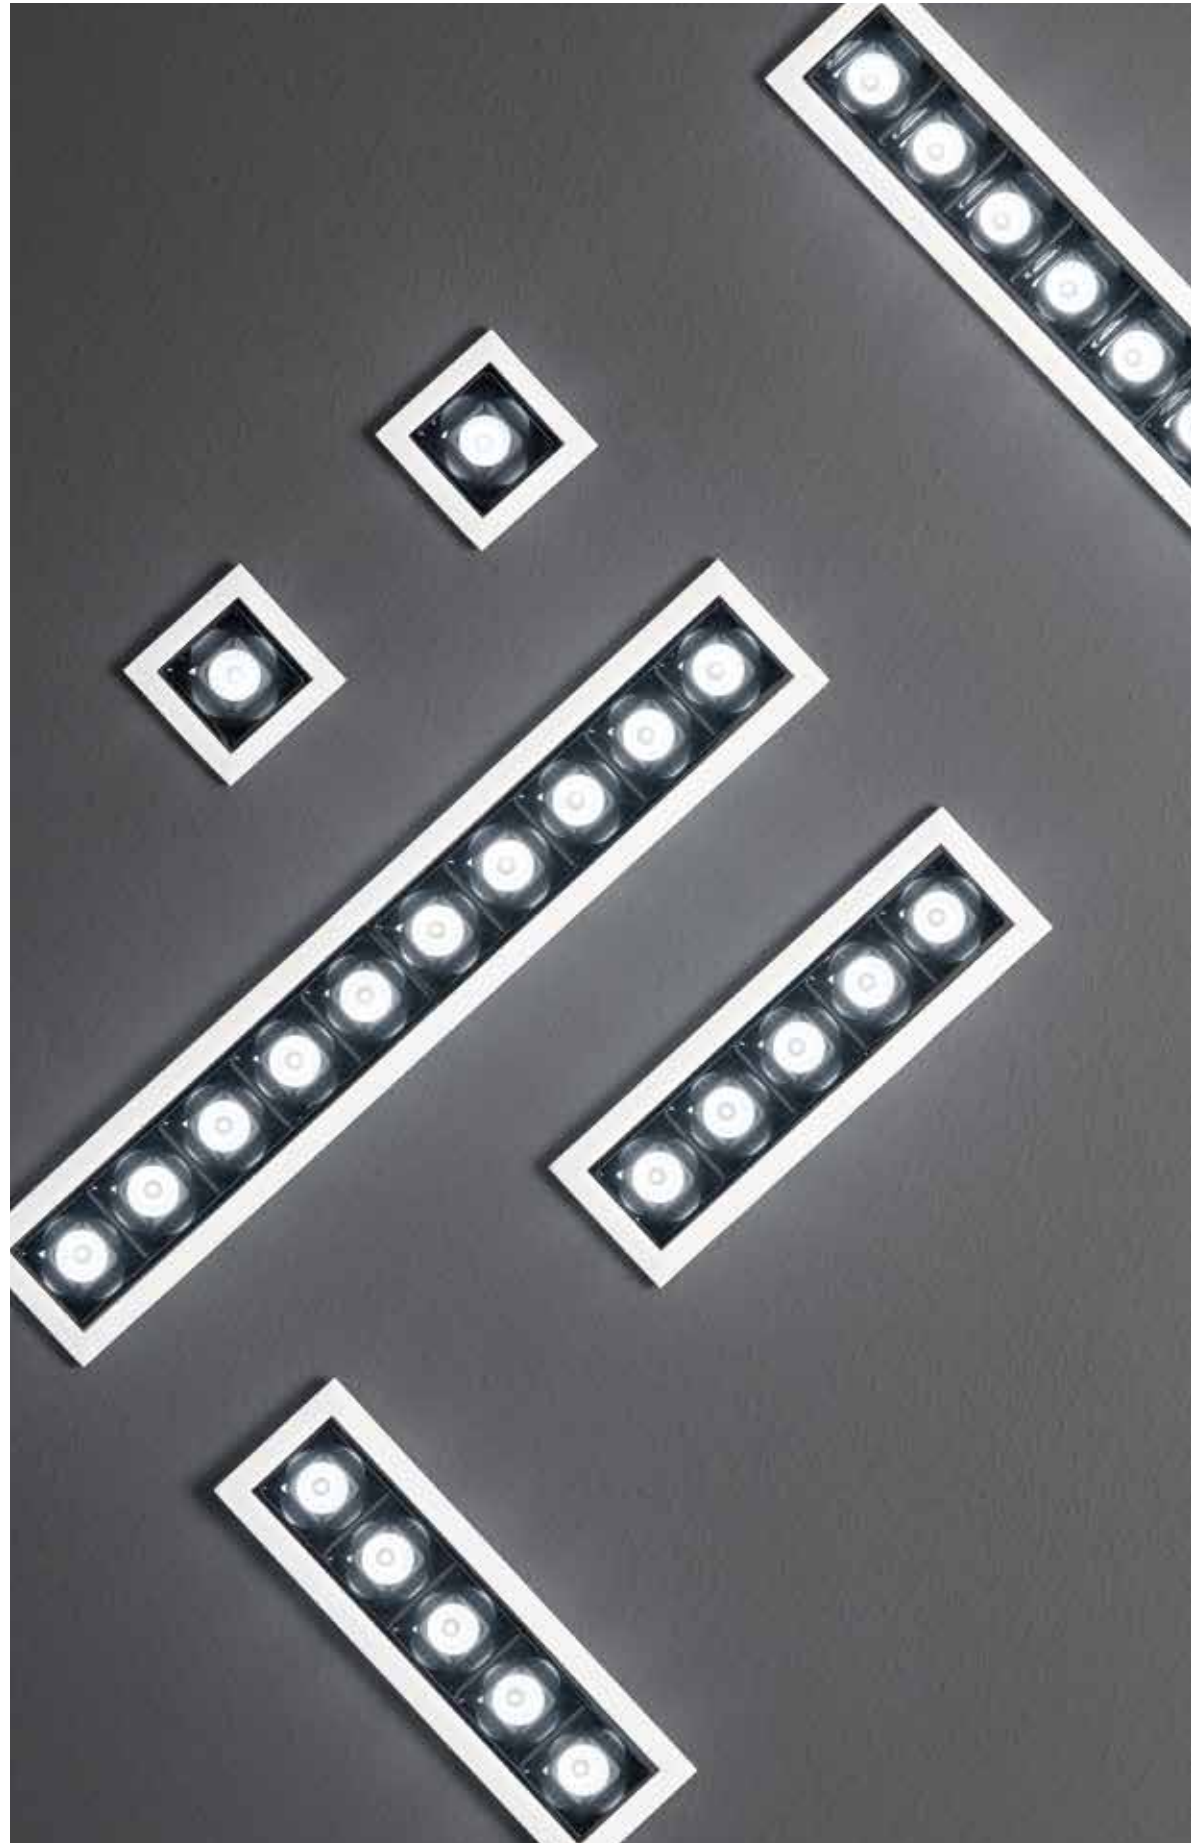



INC-SINKRO-2M

8031440360876

lumen

colour temp. | colour




230 lm

watt 2W

beam angle 45°

34 × 34 mm

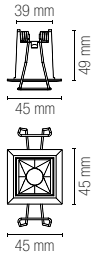

INC-SINKRO-10M

8031440360890

lumen

colour temp. | colour




1130 lm

watt 5 × 2W

beam angle 45°

136 × 34 mm



INC-SINKRO-20M

8031440360906

lumen

colour temp. | colour




2260 lm


watt 10 × 2W

beam angle 45°


269 × 34 mm

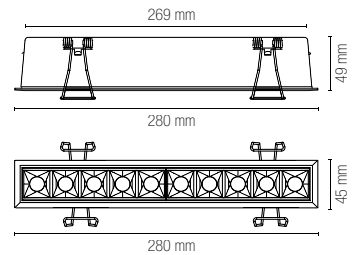


Fotometria del prodotto / Photometric curve



INC-SINKRO-2M



INC-SINKRO-10M




INC-SINKRO-20M

ELITE

Faretto da incasso antiriflesso con struttura in alluminio e finitura in bianco goffrato. Luce spot orientabile.

Anti-glare recessed spotlight with aluminum frame and embossed white finish. Adjustable spot light.

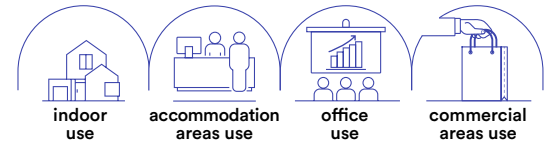

Materiale

alluminio

Colore

bianco goffrato



Temperatura colore

3000K / 4000K



Driver

incluso

Material

aluminum

Colour

Embossed white




Colour temperature

3000K / 4000K




Driver

included







	colour temp.	colour
INC-ELITE-1X10C 8031440363396		
lumen	1000 lm	
INC-ELITE-1X10M 8031440363365		
lumen	1000 lm	
watt	10W	
beam angle	40°	
pf	-	
	Ø 95 mm	




	colour temp.	colour
INC-ELITE-1X20C 8031440363372		
lumen	2000 lm	
INC-ELITE-1X20M 8031440363341		
lumen	2000 lm	
watt	20W	
beam angle	40°	
pf	-	
	Ø 107 mm	




	colour temp.	colour
INC-ELITE-1X30C 8031440363358		
lumen	2900 lm	
INC-ELITE-1X30M 8031440363327		
lumen	2900 lm	
watt	30W	
beam angle	40°	
pf	0.90	
	Ø 150 mm	



	colour temp.	colour
INC-ELITE-1X45C 8031440363334		
lumen	4500 lm	
INC-ELITE-1X45M 8031440363303		
lumen	4500 lm	
watt	45W	
beam angle	40°	
pf	0.90	
	Ø 150 mm	




Fotometria del prodotto / Photometric curve

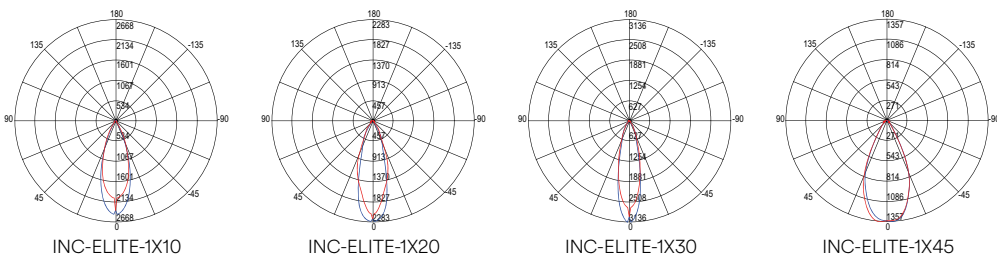

QUARK

Faretto da incasso con struttura in alluminio antiriflesso e finitura in bianco o nero satinato.

Recessed spotlight with anti-reflective aluminum structure and satin black or white finish.

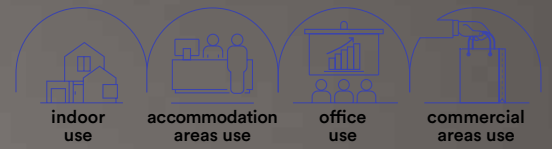

Materiale

alluminio + PC

Colore

bianco satinato
nero satinato



Temperatura colore selezionabile

3000K / 4000K / 6500K



Driver

incluso

Material

aluminum + PC

Colour

satin white
satin black



Selectable color temperature

3000K / 4000K / 6500K



Driver

included





	colour temp.	colour
INC-QUARK-R8DA-BCO 8031414923816	1040 lm	
INC-QUARK-R8DA-NER 8031414923847	1040 lm	

watt	8W
beam angle	38°
	Ø 50 mm



	colour temp.	colour
INC-QUARK-R12DA-BCO 8031414923823	1480 lm	
INC-QUARK-R12DA-NER 8031414923854	1480 lm	

watt	12W
beam angle	38°
	Ø 75 mm




	colour temp.	colour
INC-QUARK-R18DA-BCO 8031414923830	2350 lm	
INC-QUARK-R18DA-NER 8031414923861	2350 lm	

watt	18W
beam angle	38°
	Ø 80 mm


	colour temp.	colour
INC-QUARK-R8-BCO 8031414893621	830 lm	
INC-QUARK-R8-NER 8031414893652	830 lm	

watt	8W
beam angle	38°
	Ø 50 mm




	colour temp.	colour
INC-QUARK-R12-BCO 8031414893638	1300 lm	
INC-QUARK-R12-NER 8031414893669	1300 lm	

watt	12W
beam angle	38°
	Ø 75 mm




	colour temp.	colour
INC-QUARK-R18-BCO 8031414893645	2000 lm	
INC-QUARK-R18-NER 8031414893676	2000 lm	


watt	18W
beam angle	38°
	Ø 80 mm




Fotometria del prodotto / Photometric curve



INC-QUARK-R8



INC-QUARK-R12




INC-QUARK-R18

XANTO

Faretto da incasso con struttura in alluminio pressofuso antiriflesso con finitura in bianco satinato. Disponibile dalla forma quadrata o rotonda in diverse misure.

Recessed spotlight with anti-glare die-cast aluminum structure with satin white finish. Available in square or round shape different sizes.

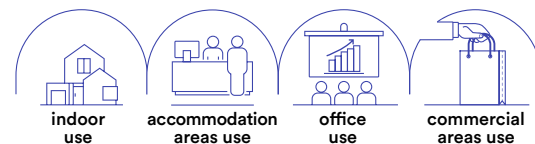

Materiale

alluminio pressofuso

Colore

bianco satinato



Temperatura colore

3000K / 4000K / 5000K



Driver

incluso

Material

die cast aluminum

Colour

satin white



Colour temperature

3000K / 4000K / 5000K



Driver

included







XANTO




	colour temp.	colour
INC-XANTO-C-R120 8031414861101		
lumen	1120 lm	
INC-XANTO-M-R120 8031414861224		
lumen	1120 lm	
INC-XANTO-F-R120 8031414861163		
lumen	1120 lm	
watt	12W	
beam angle	98°	
pf	-	
	Ø 110 mm	




	colour temp.	colour
INC-XANTO-C-R154 8031414861118		
lumen	1700 lm	
INC-XANTO-M-R154 8031414861231		
lumen	1700 lm	
INC-XANTO-F-R154 8031414861170		
lumen	1700 lm	
watt	18W	
beam angle	98°	
pf	-	
	Ø 145 mm	




	colour temp.	colour
INC-XANTO-C-R220 8031414861125		
lumen	3000 lm	
INC-XANTO-M-R220 8031414861248		
lumen	3000 lm	
INC-XANTO-F-R220 8031414861187		
lumen	3000 lm	
watt	30W	
beam angle	98°	
pf	0.90	
	Ø 200 mm	




Fotometria del prodotto / Photometric curve




INC-XANTO-F-R120





INC-XANTO-F-R154





INC-XANTO-F-R220

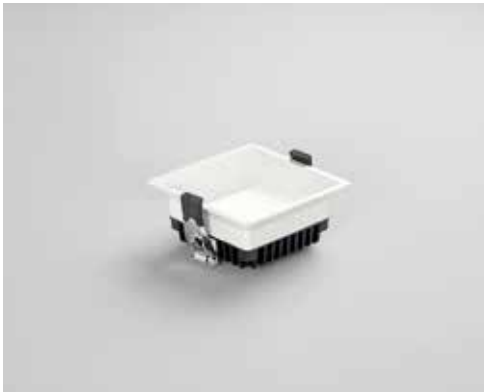



	colour temp.	colour
INC-XANTO-C-Q110 8031414861071 lumen	3000 K	White
INC-XANTO-M-Q110 8031414861194 lumen	4000 K	White
INC-XANTO-F-Q110 8031414861132 lumen	6500 K	White
watt	12W	
beam angle	98°	
pf	-	
	100 × 100 mm	




	colour temp.	colour
INC-XANTO-C-Q145 8031414861088 lumen	3000 K	White
INC-XANTO-M-Q145 8031414861200 lumen	4000 K	White
INC-XANTO-F-Q145 8031414861149 lumen	6500 K	White
watt	18W	
beam angle	98°	
pf	-	
	136 × 136 mm	




	colour temp.	colour
INC-XANTO-C-Q220 8031414861095 lumen	3000 K	White
INC-XANTO-M-Q220 8031414861217 lumen	4000 K	White
INC-XANTO-F-Q220 8031414861156 lumen	6500 K	White
watt	30W	
beam angle	98°	
pf	0.90	
	200 × 200 mm	




Fotometria del prodotto / Photometric curve



INC-XANTO-F-Q120



INC-XANTO-F-Q145




INC-XANTO-F-Q220

MACK

**Faretto da incasso in policarbonato anti
abbagliamento con diffusore bianco e riflettore cromato.**

Recessed spotlight in anti-glare polycarbonate
with white diffuser and chromed reflector.

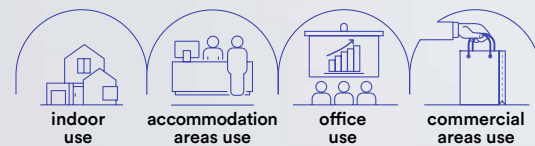

Materiale

PC

Colore

bianco con
riflettore cromato



Temperatura colore

3000K / 4000K



Driver

integrato

Material

PC

Colour

white with
chrome reflector



Colour temperature

3000K / 4000K



Driver

built-in



INC-MACK-15C

8031414873913

lumen

colour temp. colour



1650 lm

INC-MACK-15

8031414867974

lumen



1650 lm

watt


15W

beam angle

75°



Ø 125 mm



INC-MACK-20C

8031414873906

lumen

colour temp. colour



2500 lm

INC-MACK-20

8031414867981

lumen



2500 lm

watt


20W

beam angle

75°



Ø 160 mm



INC-MACK-25C

8031414873890

lumen

colour temp. colour



3050 lm

INC-MACK-25

8031414867998

lumen



3050 lm

watt


25W

beam angle


75°




Ø 200 mm

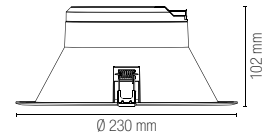


Fotometria del prodotto / Photometric curve



INC-MACK 15W



INC-MACK 20W




INC-MACK 25W

TRON

Faretto da incasso con struttura in alluminio e diffusore in acrilico bianco opaco con interruttore per regolazione temperatura colore.

Recessed spotlight with aluminum structure and matt white acrylic diffuser with switch for color temperature regulation.

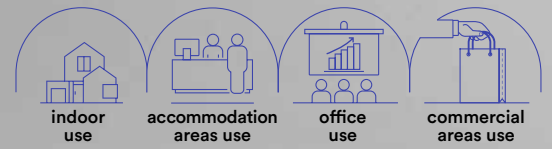

Materiale

struttura in alluminio,
diffusore in acrilico

Colore

bianco opaco



Temperatura colore selezionabile

3000K / 4000K / 6000K



Driver

incluso

Material

aluminum structure,
acrylic diffuser

Colour

matt white



Selectable color temperature

3000K / 4000K / 6000K



Driver

included




INC-TRON-7
8031414876198
lumen

colour temp.	colour

720 lm

watt	7W
beam angle	120°
pf	-
	Ø 75 mm




INC-TRON-20
8031414876204
lumen

colour temp.	colour

2480 lm

watt	20W
beam angle	120°
pf	0.90
	Ø 175 mm




INC-TRON-30
8031414876211
lumen


colour temp.	colour

3300 lm


watt	30W
beam angle	120°
pf	0.90
	Ø 210 mm

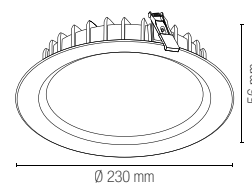


Fotometria del prodotto / Photometric curve



INC-TRON-7



INC-TRON-20




INC-TRON-30

SLIM CCT

Faretto da incasso con struttura rotonda in alluminio pressofuso ultrasottile con interruttore per regolazione temperatura colore.

Recessed spotlight with round structure in ultra-thin die-cast aluminum with switch for color temperature regulation.

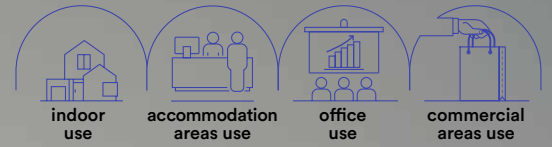

Materiale

alluminio pressofuso

Colore

bianco



Temperatura colore selezionabile

3000K / 4000K / 6500K



Driver

incluso

Material

die cast aluminum

Colour

white




Selectable color temperature

3000K / 4000K / 6500K



Driver


included



INC-SLIM-8CCT
8031414892310
lumen

colour temp.	colour

780 lm




watt	8W
beam angle	120°
	Ø 110 mm



INC-SLIM-12CCT
8031414892280
lumen

colour temp.	colour

1260 lm




watt	12W
beam angle	120°
	Ø 160 mm



INC-SLIM-18CCT
8031414892297
lumen

colour temp.	colour

1980 lm




watt	18W
beam angle	120°
	Ø 205 mm



INC-SLIM-24CCT
8031414892303
lumen


colour temp.	colour

2700 lm




watt	24W
beam angle	120°
	Ø 220 mm


Fotometria del prodotto / Photometric curve




INC-SLIM-8CCT



INC-SLIM-12CCT



INC-SLIM-18CCT



INC-SLIM-24CCT

FLAP CCT

Faretto da incasso con struttura quadrata in alluminio pressofuso ultrasottile con interruttore per regolazione temperatura colore.

Recessed spotlight with square structure in ultra-thin die-cast aluminum with switch for color temperature regulation.



Materiale

alluminio pressofuso

Colore

bianco



Temperatura colore selezionabile

3000K / 4000K / 6500K



Driver

incluso

Material

die cast aluminum

Colour

white





Selectable color temperature

3000K / 4000K / 6500K



Driver



included

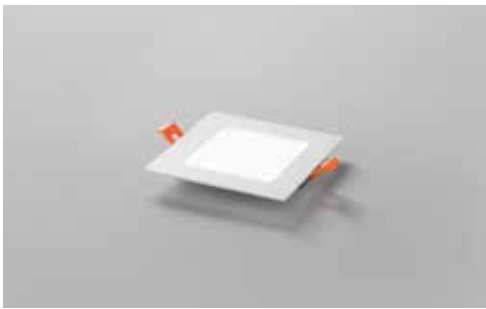

INC-FLAP-8CCT

8031414892273

lumen





watt	8W
beam angle	120°
□	110 × 110 mm



INC-FLAP-12CCT

8031414892242

lumen





watt	12W
beam angle	120°
□	160 × 160 mm



INC-FLAP-18CCT

8031414892259

lumen





watt	18W
beam angle	120°
□	205 × 205 mm



INC-FLAP-24CCT





8031414892266

lumen



watt	24W
beam angle	120°
□	220 × 220 mm

Fotometria del prodotto / Photometric curve



TOTAL

**Incasso in alluminio con diffusore
in policarbonato effetto plafoniera
con bordi illuminati.**

Built-in aluminum with polycarbonate
diffuser with illuminated edges.

Materiale

alluminio + PC

Colore

bianco



**Temperatura colore
selezionabile**

3000K / 4000K / 6500K



Driver

incluso

Material

aluminum + PC

Colour

white




**Selectable color
temperature**

3000K / 4000K / 6500K



Driver

included



INC-TOTAL-R15
8031414893744

lumen

colour temp.	colour

1600 lm

watt 15W
beam angle 120°
Ø 70 - 115 mm




INC-TOTAL-R24
8031414893751

lumen

colour temp.	colour

2680 lm

watt 24W
beam angle 120°
Ø 110 - 160 mm




INC-TOTAL-R30
8031414893768

lumen


colour temp.	colour

3300 lm


watt 30W
beam angle 120°
Ø 130 - 200 mm

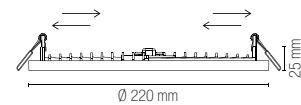


Fotometria del prodotto / Photometric curve



INC-TOTAL-R15



INC-TOTAL-R24




INC-TOTAL-R30

PLUS

Faretto da incasso con struttura in alluminio e diffusore in acrilico bianco opaco.

Recessed spotlight with aluminum frame and matt white acrylic diffuser.

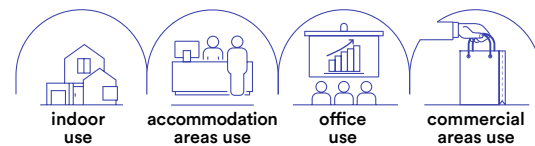

Materiale
struttura in
alluminio diffusore
in acrilico

Colore
bianco opaco



**Temperatura colore
selezionabile**

3000K / 4000K / 6000K



Driver
incluso

Material
aluminum structure,
acrylic diffuser

Colour
satin white




**Selectable color
temperature**

3000K / 4000K / 6000K



Driver
included





INC-PLUS-R8M

8031414876105


lumen

colour temp.



780 lm

colour



watt 8W

beam angle 120°

pf -

Ø 75 mm



INC-PLUS-R20M

8031414876136

lumen

colour temp.



2200 lm

colour



watt 20W

beam angle 120°

pf -

Ø 155 mm



INC-PLUS-R30M

8031414876167

lumen

colour temp.



3500 lm

colour



watt 30W


beam angle 120°

pf 0.90


Ø 205 mm




Fotometria del prodotto / Photometric curve



INC-PLUS-R8M



INC-PLUS-R20M




INC-PLUS-R30M

SNIPER

Faretto da incasso con struttura in fibre di plastica e punto luce orientabile.

Recessed spotlight with plastic fibre structure and adjustable light point.

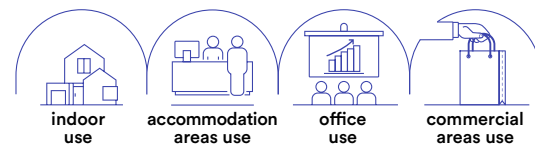

Materiale

PC

Colore

bianco



Temperatura colore selezionabile

3000K / 4000K / 6500K



Driver

integrato

Material

PC

Colour

white




Selectable color temperature

3000K / 4000K / 6500K



Driver

built-in



INC-SNIPER-QR90

8031414888719

lumen

colour temp. | colour

660 lm

watt


7W

beam angle

38°




Ø 70 mm

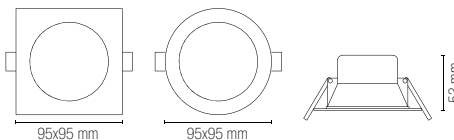

Accessori inclusi / Included accessories



due ghiera intercambiabili
1 rotonda 1 quadrata /
interchangeable ring

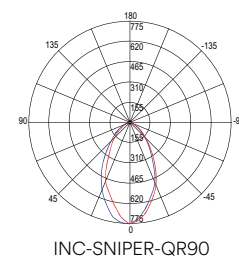

INC-SNIPER-QR120

8031414888726

lumen

colour temp. | colour

1165 lm

watt


12W

beam angle

38°




Ø 90 mm

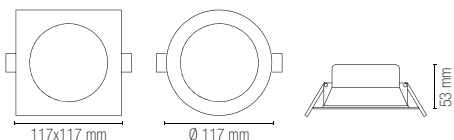

Accessori inclusi / Included accessories




due ghiera intercambiabili
1 rotonda 1 quadrata /
interchangeable ring

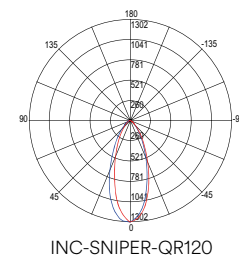

GLOW

Faretto da incasso BBC in PC.
BBC recessed spotlight in PC.

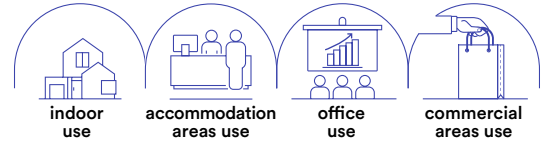

Materiale
PC

Colore
bianco



Temperatura colore selezionabile
2700K / 3000K / 4000K



Driver
integrato

Material
PC

Colour
white



Selectable color temperature
2700K / 3000K / 4000K





Driver
built-in



INC-GLOW-R90
8031414925933
lumen

colour temp. | colour |
600 lm

watt 6W
beam angle 68°
Ø 68 mm

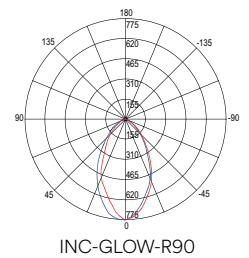


INCASSI / RECESSED LAMPS

In.tec light

POLARIS

Faretto da incasso con struttura in alluminio e punto luce orientabile.
Recessed spotlight with aluminum structure and adjustable light point.

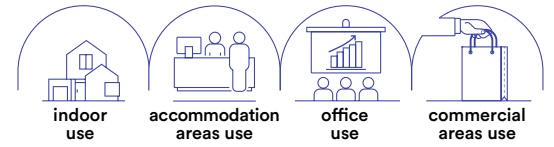

- Materiale**
alluminio
- Colore**
bianco gofrato
silver gofrato
- Temperatura colore**
4000K
- Driver**
incluso
- Durata e on/off**
25.000 h
>10.000 on/off
- Material**
aluminum
- Colour**
embossed white
embossed silver
- Colour temperature**
4000K
- Driver**
included
- Life time and on/off**
25.000 h
>10.000 on/off




INC-POLARIS-R3 BCO
8031429681169

lumen 300 lm


INC-POLARIS-R3

8031432041196

lumen 300 lm



colour temp. | colour |




INC-POLARIS R3

watt 3W

beam angle 24°

Ø 55 mm

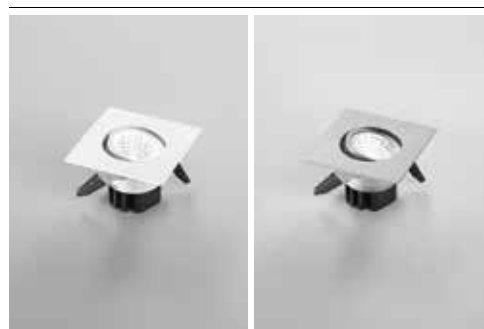


INC-POLARIS-Q3 BCO
8031429761168

lumen 300 lm


INC-POLARIS-Q3

8031432051195

lumen 300 lm



colour temp. | colour |



INC-POLARIS Q3


watt 3W

beam angle 24°

Ø 55 mm

ORIONE

Faretto da incasso in alluminio nei colori bianco goffrato o silver goffrato.
Recessed aluminum spotlight in white or embossed silver.

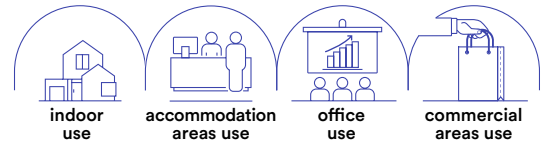

Materiale
alluminio

Colore
bianco goffrato
silver goffrato



Temperatura colore
4000K



Driver
incluso

Material
aluminum


Colour
embossed white
embossed silver



Colour temperature
4000K



Driver
included



INC-ORIONE-R6 BCO
8031429771167



lumen

colour temp.	colour
650 lm	

INC-ORIONE-R6
8031432021198

lumen

650 lm	



INC-ORIONE R6

watt 7W
beam angle 87°
Ø 75 mm



INC-ORIONE-Q6 BCO
8031434361216



lumen

colour temp.	colour
650 lm	

INC-ORIONE-Q6
8031432031197

lumen

650 lm	



INC-ORIONE Q6

watt 7W
beam angle 87°
Ø 75 mm


INCASSI / RECESSED LAMPS

In.tec light

FUSION

Faretto da incasso in alluminio con
finitura in nikel, bianco satinato o oro.

Recessed aluminum spotlight with
nikel, satin white or gold finish.

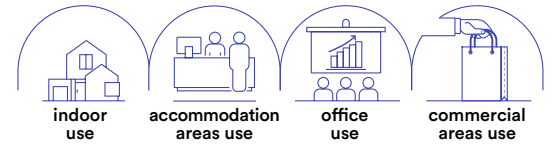

Materiale

alluminio

Colore

bianco satinato
nikel
oro



Temperatura colore

4000K



Driver


integrato

Material

aluminum

Colour

white
nikel
gold



Colour temperature

4000K



Driver

built-in






1 pz / 1 pcs



	colour temp.	colour
INC-FUSION-5W BCO 8031440361736 lumen	400 lm	
INC-FUSION-5W NIK 8031440361705 lumen	400 lm	
INC-FUSION-5W ORO 8031440361712 lumen	400 lm	




watt	5W
beam angle	120°
	Ø 60 mm

Kit 3 pz / Kit 3 pcs




	colour temp.	colour
INC-FUSION-3X5W BCO 8031440353335 lumen	3 x 400 lm	
INC-FUSION-3X5W NIK 8031440353342 lumen	3 x 400 lm	
INC-FUSION-3X5W ORO 8031440353359 lumen	3 x 400 lm	



watt	3 x 5W
beam angle	120°
	Ø 60 mm

Fotometria del prodotto / Photometric curve




INC-FUSION 5W

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element

BLITZ

Lampada sottopensile kit 3pz con struttura in alluminio in policarbonato bianco opaco.

Cabinet ceiling lamp kit 3pz with aluminum structure in opal white polycarbonate.



Materiale

struttura in alluminio
diffusore in pc

Colore

bianco opaco



Temperatura colore

4000K



Driver

incluso

Material

aluminum structure with PC diffuser

Colour

satin white and silver reflector




Colour temperature

4000K



Driver

included



LED-BLITZ-R3*

Le curve fotometriche rappresentano il singolo modulo LED per ogni elemento / Above photometric curve represent the single module of each element



Accessori inclusi / Included accessories



x3
Driver + morsettiera con cavo 1,5m / Driver + connector with 1,5m cable included

Kit 3 pz / Kit 3 pcs




LED-BLITZ-R3
8031440353274
lumen

colour temp.



350 lm


watt 3 x 5W
beam angle 105°



NEMO

Lampada sottopensile da incasso con struttura in termoplastica con finitura in bianco o silver.

Recessed cabinet lamp with thermoplastic structure with white or silver finish.

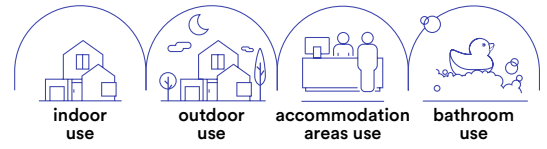

Materiale
struttura in termoplastica

Colore
bianco
silver



Temperatura colore
4000K



Driver
integrato

Material
thermoplastic structure


Colour
white
silver



Colour temperature
4000K



Driver
built-in



INC-NEMO 3,5W



INC-NEMO-65 BCO

8031414877065

lumen

colour temp.



277 lm

INC-NEMO-65 SIL

8031414877072

lumen



277 lm

watt

3,5W

beam angle

120°




Ø 55 mm



In.tec light INCASSI / RECESSED LAMPS

RAINBOW

Faretto da incasso in alluminio in bianco o cromato.
Recessed aluminum spotlight in white or chromed.

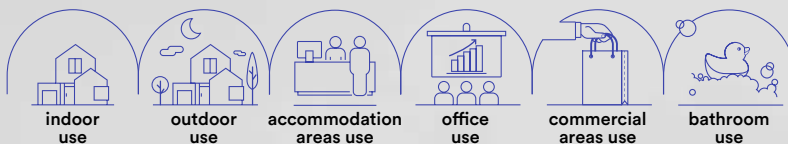

Materiale
alluminio

Colore
bianco
cromo



Temperatura colore
RGB + 4000K



Driver
DC 12V
tensione costante
non incluso

Material
aluminum


Colour
white
chrome



Colour temperature
RGB + 4000K



Driver
DC 12V
constant voltage
not included



EASY
DOMOTICA



INC-RAINBOW-M BCO
8031414862627
lumen


colour temp. | colour |

110 lm

INC-RAINBOW-M
8031414862603
lumen

110 lm

watt 5W
beam angle 120°
Ø 90 mm



**Sistema di connessione /
Connection system**

Driver pag. 843-852
Controller pag. 854-857

WHITE - BIANCO
YELLOW - GIALLO
GREEN - VERDE
RED - ROSSO
BLACK - NERO




INC-RAINBOW 4000K

ZENIT

Faretto da incasso orientabile con struttura in policarbonato e finitura in nikel, bianco satinato, cromo o oro.



Adjustable recessed spotlight with polycarbonate structure and nikel, satin white, chrome or gold finish.

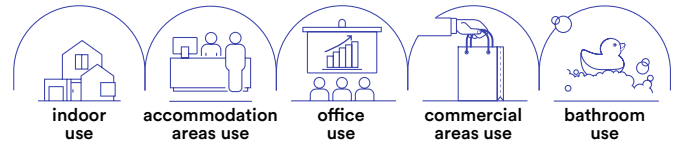

- Materiale**
policarbonato
- Colore**
bianco satinato
nikel
cromo
oro
- Temperatura colore**
3000K
- Driver**
integrato
- Material**
polycarbonate
- Colour**
satin white
nikel
chrome
gold finish
- Colour temperature**
3000K
- Driver**
built-in



	colour temp.	colour
INC-ZENIT-5W BCO 8031439881276		
lumen	390 lm	
INC-ZENIT-5W NIK 8031439901271		
lumen	390 lm	
INC-ZENIT-5W CR 8031439891275		
lumen	390 lm	
INC-ZENIT-5W ORO 8031439911270		
lumen	390 lm	

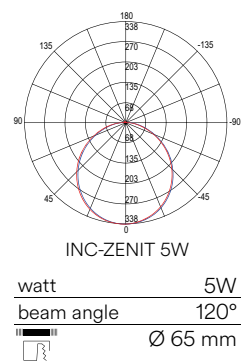


INCASSI / RECESSED LAMPS

In.tec light

QUANTUM

Faretto da incasso con struttura in alluminio
nelle versioni bianco e nero satinato.

Recessed spotlight with aluminum structure
in white and satin black versions.

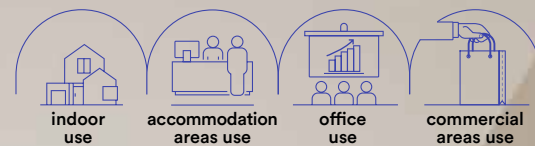

Materiale

alluminio + PC

Colore

bianco satinato
nero satinato



Temperatura colore selezionabile

3000K / 4000K / 6500K



Driver

integrato

Material

aluminum + PC

Colour

satin white
satin black



Selectable color temperature

3000K / 4000K / 6500K



Driver

built-in





DALI		colour temp.	colour
	INC-QUANTUM-R18DA-BCO 8031414923878		
lumen		2350 lm	
INC-QUANTUM-R18-NER 8031414923908			
lumen		2350 lm	
watt		18W	
beam angle		60°	
pf		-	
		Ø 120 mm	




DALI		colour temp.	colour
	INC-QUANTUM-R30DA-BCO 8031414923885		
lumen		4200 lm	
INC-QUANTUM-R30DA-NER 8031414923915			
lumen		4200 lm	
watt		30W	
beam angle		60°	
pf		0.90	
		Ø 140 mm	

DALI		colour temp.	colour
	INC-QUANTUM-R40DA-BCO 8031414923892		
lumen		5500 lm	
INC-QUANTUM-R40DA-NER 8031414923922			
lumen		5500 lm	
watt		40W	
beam angle		60°	
pf		0.90	
		Ø 165 mm	




DALI		colour temp.	colour
	INC-QUANTUM-R18-BCO 8031414893683		
lumen		2000 lm	
INC-QUANTUM-R18-NER 8031414893713			
lumen		2000 lm	
watt		18W	
beam angle		60°	
pf		-	
		Ø 120 mm	

DALI		colour temp.	colour
	INC-QUANTUM-R30-BCO 8031414893690		
lumen		3300 lm	
INC-QUANTUM-R30-NER 8031414893720			
lumen		3300 lm	
watt		30W	
beam angle		60°	
pf		0.90	
		Ø 140 mm	

DALI		colour temp.	colour
	INC-QUANTUM-R40-BCO 8031414893706		
lumen		4300 lm	
INC-QUANTUM-R40-NER 8031414893737			
lumen		4300 lm	
watt		40W	
beam angle		60°	
pf		0.90	
		Ø 165 mm	




Fotometria del prodotto / Photometric curve

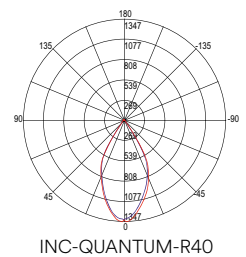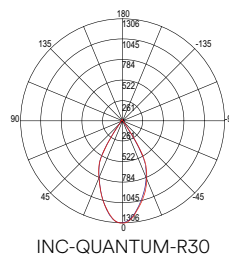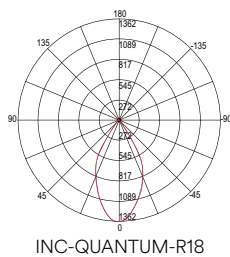

HORUS

Faretto da incasso dimmerabile con struttura in policarbonato bianco opaco.
Dimmable recessed spotlight with matt white polycarbonate structure.

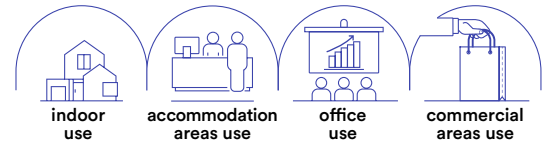

Materiale
policarbonato

Colore
bianco opaco



Temperatura colore
4000K



Dimmer
dimmer 1-10

Driver
integrato

Material
polycarbonate

Colour
matt white



Colour temperature
4000K



Dimmer
dimmable 1-10

Driver
built-in





INC-HORUS-10W

8031440363501

lumen

colour temp. | colour


1050 lm

watt 10W

beam angle 100°

pf -

Ø 90 mm



INC-HORUS-15W

8031440363518

lumen

colour temp. | colour


1900 lm

watt 15W

beam angle 100°

pf -

Ø 120 mm



INC-HORUS-20W

8031440363464

lumen

colour temp. | colour


2600 lm

watt 20W

beam angle 100°

pf -

Ø 170 mm



INC-HORUS-25W

8031440363495

lumen

colour temp. | colour


3250 lm

watt 25W


beam angle 100°

pf 0.90


Ø 200 mm




Fotometria del prodotto / Photometric curve




INC-HORUS-10W



INC-HORUS-15W



INC-HORUS-20W



INC-HORUS-25W

MATRIX

Faretto da incasso in metallo con lampadina GU10 inclusa disponibile nei colori bianco, nikel, oro e cromo.

Recessed metal spotlight with GU10 bulb included available in white, nikel, gold and chrome.



Materiale
metallo

Colore
bianco
nikel
cromo
oro



Temperatura colore
3000K



Material
metal

Colour
white
nikel
chrome
gold



Colour temperature
3000K






MATRIX


Kit 3 pz / Kit 3 pcs

Ø 80 mm




Kit 3 pz / Kit 3 pcs

Ø 100 mm
orientabile / adjustable



1 pz / 1 pcs

Ø 100 mm
orientabile / adjustable





INC-MATRIX-LEDF3 BCO
8031440359320



INC-MATRIX-LEDF3 NIK
8031440359337



3 x GU10 5W LED
Ø 60 mm



Accessori inclusi / Included accessories



**3 lampadine LED SMD /
3 LED SMD light bulbs**

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	3 x 413 lm



**Staffa con connettore /
Bracket with connector**

3 pz inclusi / 3 pcs included



**GU10 230V~50Hz
Portalampada /
Lampholder**

3 pz inclusi / 3 pcs included

INC-MATRIX-LEDM3 BCO
8031429651162



INC-MATRIX-LEDM3 NIK
8031431571182



INC-MATRIX-LEDM3 CR
8031440313032



INC-MATRIX-LEDM3 ORO
8031440313025



3 x GU10 5W LED
Ø 80 mm



Accessori inclusi / Included accessories



**3 lampadine LED SMD /
3 LED SMD light bulbs**

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	3 x 413 lm



**Staffa con connettore /
Bracket with connector**

3 pz inclusi / 3 pcs included



**Portalampada /
Lampholder
GU10 230V~50Hz**

3 pz inclusi / 3 pcs included

INC-MATRIX-LEDM1 BCO
8031440313063



INC-MATRIX-LEDM1 NIK
8031440313049



INC-MATRIX-LEDM1 CR
8031440313056



INC-MATRIX-LEDM1 ORO
8031440313070



1 x GU10 5W LED
Ø 80 mm



Accessori inclusi / Included accessories



**Lampadina LED SMD /
LED SMD light bulb**

watt	5W
beam angle	100°
cri	80
on/off	>10.000
3000K	
lumen	413 lm



**Staffa con connettore /
Bracket with connector**

3 pz inclusi / 3 pcs included




**Portalampada /
Lampholder
GU10 230V~50Hz**

3 pz inclusi / 3 pcs included

TUBEX

Incasso in gesso componibile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante. Punto luce regolabile e orientabile con finitura in bianco o nero gofrato.

Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body. Adjustable light point with embossed black or white finish.

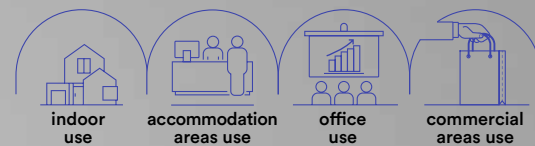

indoor use

accommodation areas use

office use

commercial areas use

Materiale

gesso e alluminio

Colore

bianco gofrato
nero gofrato



Temperatura colore

3000K / 4000K



Driver

incluso

Material

gypsum and aluminum

Colour

embossed white
embossed black



Colour temperature

3000K / 4000K



Driver

included



INC-TUBEX-2C-BCO

8031414883752

lumen

colour temp. | colour



190 lm



INC-TUBEX-2M-BCO

8031414883769

lumen



190 lm

INC-TUBEX-2C-NER

8031414883776

lumen



190 lm

INC-TUBEX-2M-NER

8031414883783

lumen



190 lm



INC-TUBEX-BASE

8031414883745

watt




2,5W

beam angle



30°



165 x 165 mm

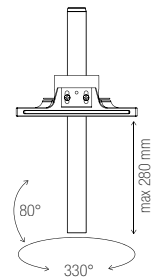

Modular system:
INC-TUBEX-BASE
+ INC-TUBEX-2




Staffa regolabile /
Adjustable bracket

STARRY

Incasso in gesso componibile da integrare nel cartongesso per dare omogeneità tra parte e corpo illuminante.

Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

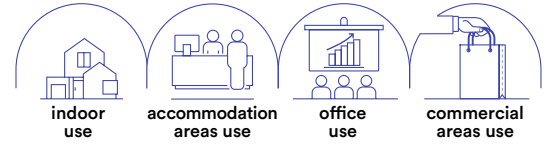

Materiale
gesso
alluminio

Colore
bianco



Temperatura colore
3000K / 4000K



Driver
incluso

Material
gypsum
aluminum

Colour
white



Colour temperature
3000K / 4000K





Driver
included



Modular system:
LED-STARRY +
INC-STARRY-R1

Modular system:
LED-STARRY +
INC-STARRY-Q1



LED-STARRY-C

8031414884476

lumen

colour
temp.

160 lm

LED-STARRY-M

8031414884483

lumen

160 lm

watt

2,5W

beam angle

45°



INC-STARRY-R1

8031414884452





Ø 75 mm

INC-STARRY-Q1

8031414884469





75 x 75 mm



GHOST

Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.

Recessed paintable gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

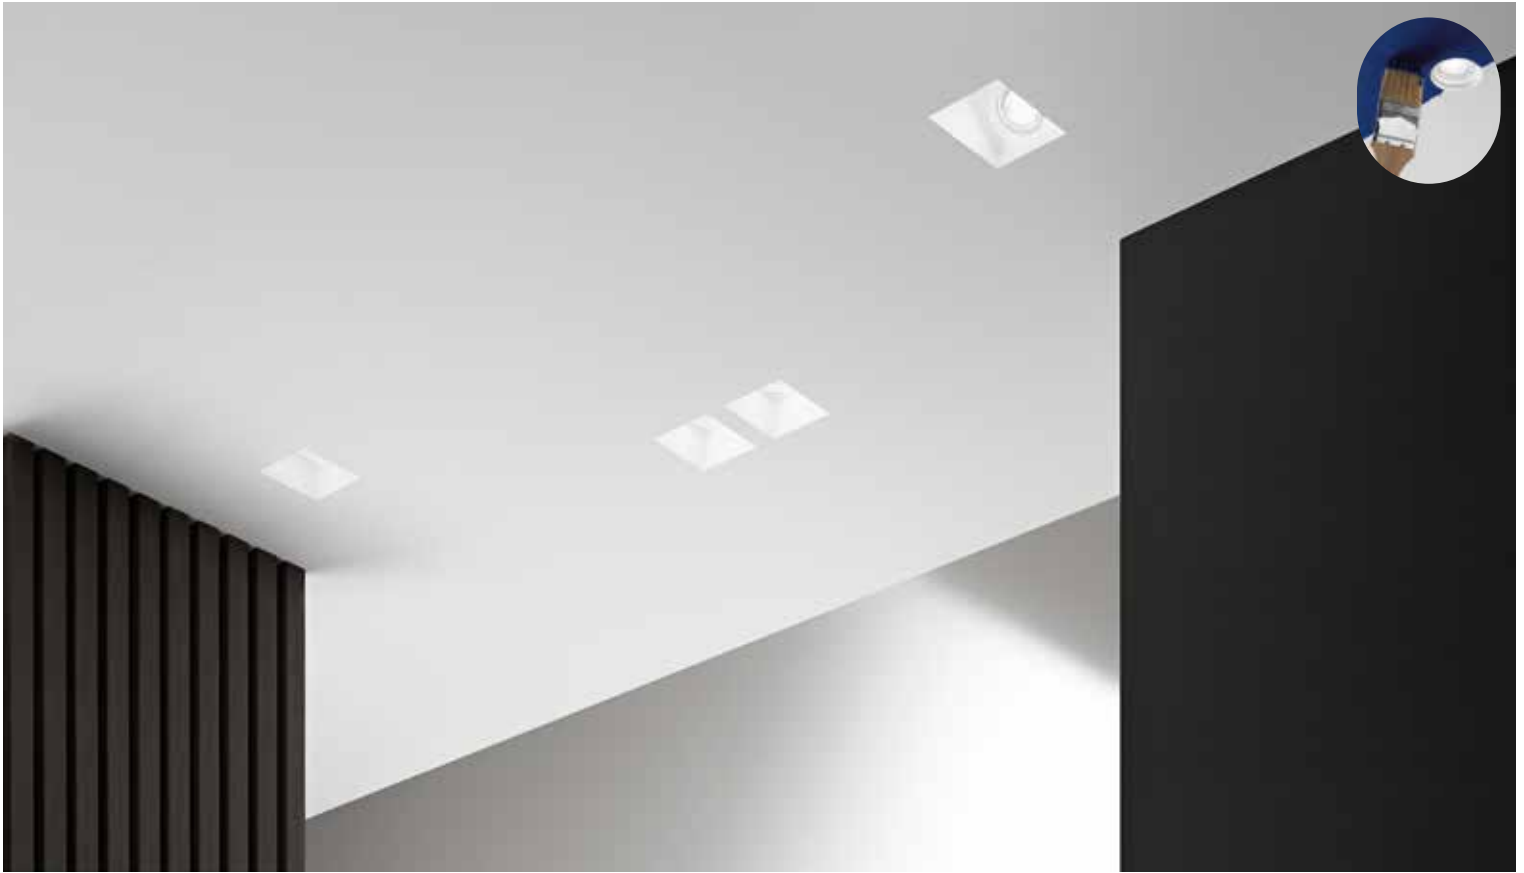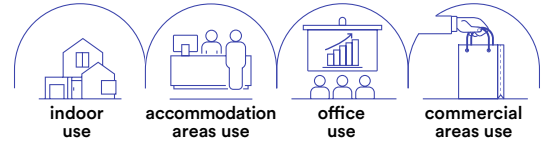

INCASSI / RECESSED LAMPS

In.tec light



INC-GHOST-Q1D
8031434241211

1 x GU10 MAX 35W
125 x 125 mm



INC-GHOST-Q1
8031434261219

1 x GU10 MAX 35W
125 x 125 mm



INC-GHOST-Q2
8031434301212

2 x GU10 MAX 35W
219 x 123 x 8-15 mm








Staffa regolabile /
Adjustable bracket



Portalamпада incluso /
Lampholder included




Lampadina non inclusa /
Light bulb not included




VULKAN

Incasto in gesso verniciabili con cilindri intercambiabili e finiture bianco, nero e oro satinato.

Gypsum down light paintable with interchangeable cylinders and in white, black and satin gold finishes.

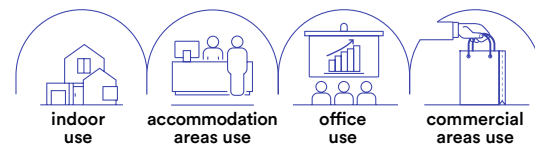

Modular system:
INC-VULKAN-BASE
+ INC-VULKAN




INC-VULKAN-BASE
8031414883707

1 x GU10 MAX 35W



170 x 170 mm




INC-VULKAN-BCO
8031414883714

INC-VULKAN-NER
8031414883721

INC-VULKAN-ORO
8031414883738

1 x GU10 MAX 35W

1 x GU10 MAX 35W



colour



Staffa regolabile /
Adjustable bracket



Portalampana incluso /
Lampholder included





Lampadina non inclusa /
Light bulb not included

ENTITY


Incasso in gesso verniciabile con ghiera intercambiabili in finiture bianco, oro e cromo.

Gypsum down light paintable with interchangeable cylinders white, black and satin gold finishes.

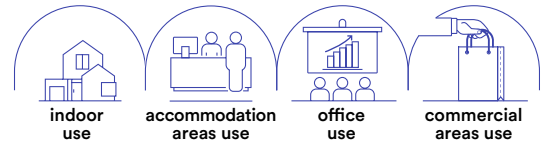


INCASSI / RECESSED LAMPS

In.tec light

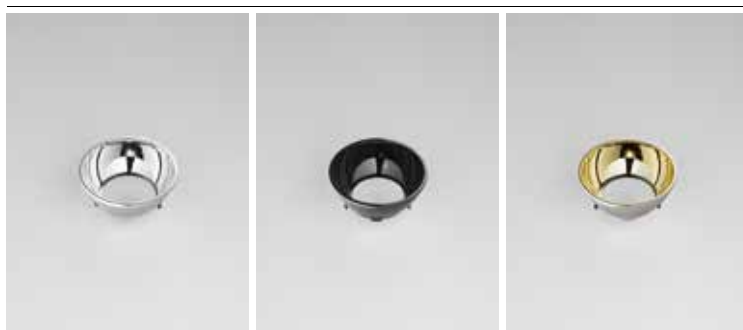

Modular system:
INC-ENTITY-Q
+ ENTITY-RING



INC-ENTITY-Q
8031414883790

1 x GU10 MAX 10W



125 x 125 mm

ENTITY-RING-CR
8031414883813

ENTITY-RING-NER
8031414883820

ENTITY-RING-ORO
8031414883806

1 x GU10 MAX 35W

colour




Staffa regolabile /
Adjustable bracket



Portalamпада incluso /
Lamp holder included





Lampadina non inclusa /
Light bulb not included



GOBLET

Incasso con struttura sporgente in gesso verniciabile e portalampane incluso.
Gypsum prominent down light paintable and lamp holder included.

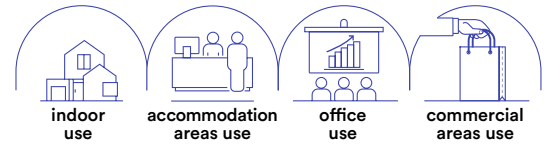



INC-GOBLET-R
8031414882960

1 x GU10 MAX 35W
Ø 75 mm



INC-GOBLET-Q
8031414882977

1 x GU10 MAX 35W
Ø 75 mm




Portalampana incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included

SHADOW

Incasso con struttura in gesso verniciabile e portalampade incluso.
Gypsum downlight paintable and lamp holder included.

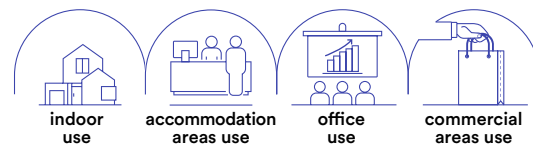

INCASSI / RECESSED LAMPS


In.tec light



INC-SHADOW-R
8031414882984

1 x GU10 MAX 35W


Ø 90 mm



INC-SHADOW-Q
8031414882991

1 x GU10 MAX 35W

Ø 100 mm




Portalamпада incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included

PHANTOM

Incasso con struttura in gesso verniciabile e portalampade incluso.
Gypsum downlight paintable and lamp holder included.

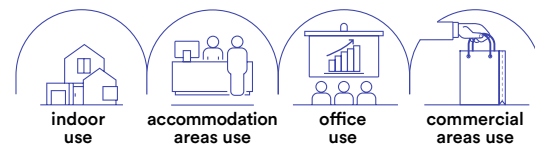



INC-PHANTOM-R1
8031431551184

1 x GU10 MAX 35W
Ø 83 mm



INC-PHANTOM-Q1
8031431561183

1 x GU10 MAX 35W
82 x 82 mm





Portalampada incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included

SPETTRO

Incasso con struttura in gesso verniciabile e portalampade incluso.
Gypsum downlight paintable and lamp holder included.

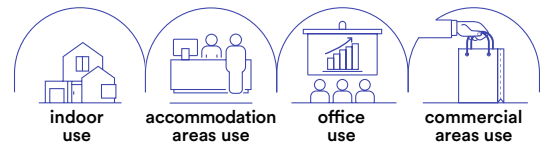

INCASSI / RECESSED LAMPS


In.tec light



INC-SPETTRO-R1
8031431531186

1 x GU10 MAX 35W


Ø 85 mm



INC-SPETTRO-Q1
8031431541185

1 x GU10 MAX 35W

Ø 95 x 95 mm



Portalamпада incluso /
Lampholder included




Lampadina non inclusa /
Light bulb not included

MINI



Incasso in gesso da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.

Recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

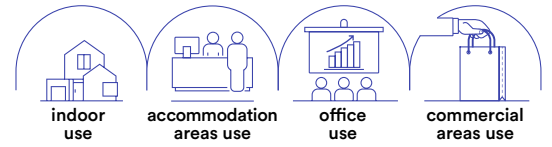


INC-MINI-R1
8031414873623

1 x MINI GU10 MAX 35W
bulb size \varnothing 34 mm
 \varnothing 73 mm

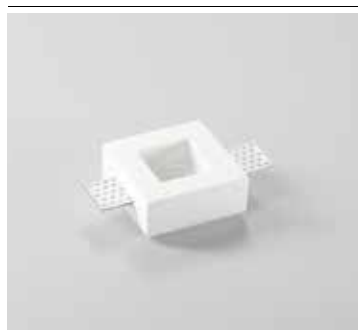


INC-MINI-Q1
8031414873616

1 x MINI GU10 MAX 35W
bulb size \varnothing 34 mm
73 x 73 mm






 Portalamпада incluso /
Lampholder included

 Lampadina non inclusa /
Light bulb not included

HIVE

Incasso in gesso verniciabile con 4 punti luce da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.

Recessed gypsum paintable downlight with 4 light to be integrated into the plasterboard to give homogeneity between ceiling and lighting body.

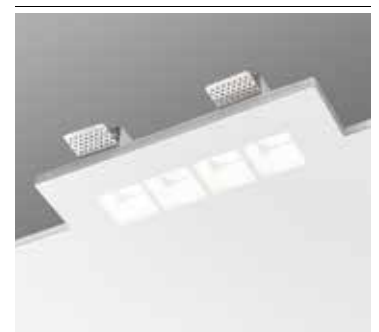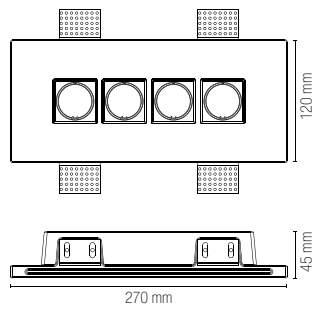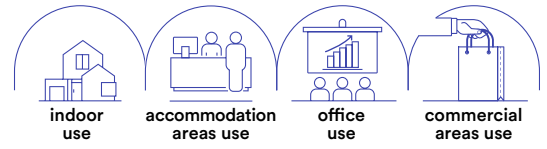

INC-HIVE-RT4
8031414884278

4 x MINI GU10 MAX 35W
bulb size Ø 34 mm
275 x 125 mm



Staffa regolabile /
Adjustable bracket



Portalamпада incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included



INCASSI / RECESSED LAMPS

In.tec light

SPIRIT


Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.

Recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

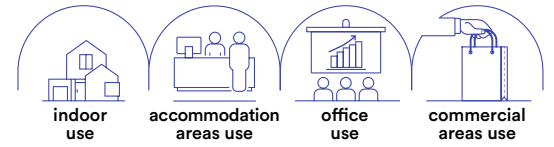



INC-SPIRIT-R1
8031440362177

1 x GU10 MAX 35W
Ø 103 mm

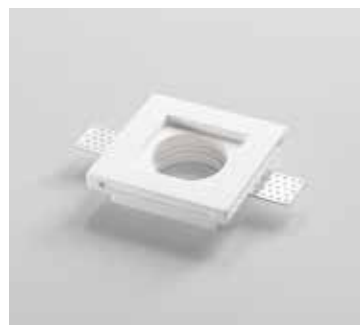

INC-SPIRIT-Q1
8031440362160

1 x GU10 MAX 35W
103 x 103 mm



Portalamпада incluso /
Lampholder included




Lampadina non inclusa /
Light bulb not included

SNOW

Incasso in gesso verniciabile con diffusore in vetro satinato da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminato.

Recessed paintable gypsum downlight with satin glass diffuser to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

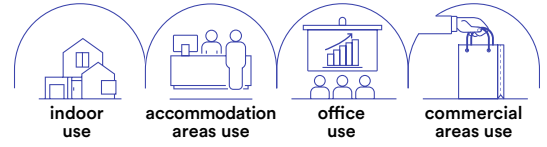

INC-SNOW-R
8031440351607

1 x GU10 MAX 10W
Ø 125 mm



INC-SNOW-Q
8031440351577



1 x GU10 MAX 10W
125 x 125 mm



Staffa regolabile /
Adjustable bracket

Portalamпада incluso /
Lampholder included

Lampadina non inclusa /
Light bulb not included

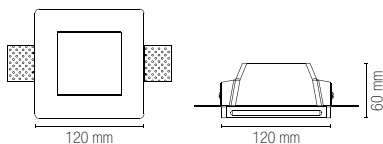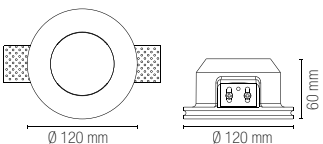


INCASSI / RECESSED LAMPS

In.tec light

MORGANA


Incasso orientabile in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.

Adjustable and paintable recessed gypsum downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body.

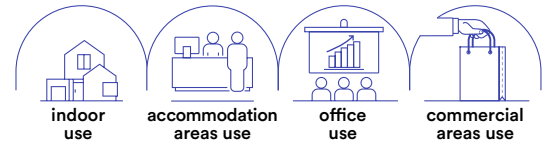


INC-MORGANA-R1
8031434211214

1 x GU10 MAX 35W
Ø 155 mm

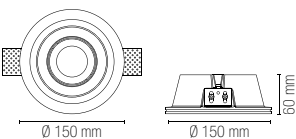


INC-MORGANA-Q1
8031434231212

1 x GU10 MAX 35W
160 x 160 mm

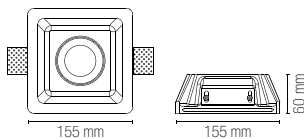

INC-MORGANA-Q2
8031434201215

2 x GU10 MAX 35W
260 x 160 mm

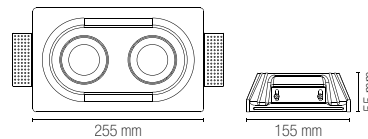

Staffa regolabile /
Adjustable bracket



Portalamпада incluso /
Lampholder included




Lampadina non inclusa /
Light bulb not included

SENSO

Incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.

Recessed gypsum paintable downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body.

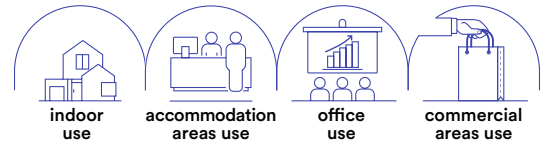


INCASSI / RECESSED LAMPS

In.tec light




INC-SENSO-MINI
8031414892723

1 x MINI GU10 MAX 10W
85 x 85 mm

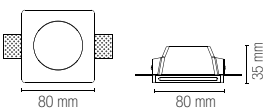


INC-SENSO-1
8031434221213

1 x GU10 MAX 35W
125 x 125 mm

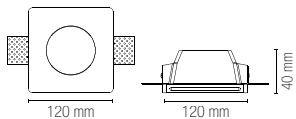

INC-SENSO-2
8031414873593

2 x GU10 MAX 35W
243 x 123 mm

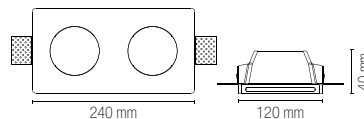

8/15mm
Staffa regolabile /
Adjustable bracket



Portalamпада incluso /
Lampholder included

Lampadina non inclusa /
Light bulb not included

BRICK


Incasto in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante con steli dalle forme modulari che sporgono dalla parete.

Recessed gypsum paintable downlight to be integrated into the plasterboard to give homogeneity between ceiling and the lighting body with modular stems protruding from the wall.

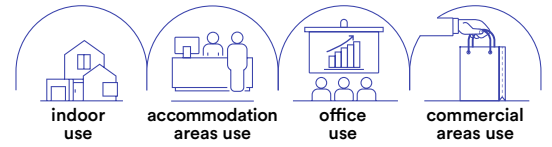

INC-BRICK-Q1
8031414873586

1 x GU10 MAX 35W
123 x 123 mm

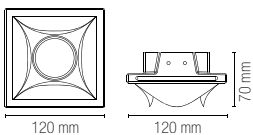

Staffa regolabile /
Adjustable bracket



Portalampada incluso /
Lampholder included




Lampadina non inclusa /
Light bulb not included

EVA

Struttura ad incasso a scomparsa in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.


Recessed structure in paintable gypsum to be integrated into the plasterboard to give homogeneity between the ceiling and lighting body.

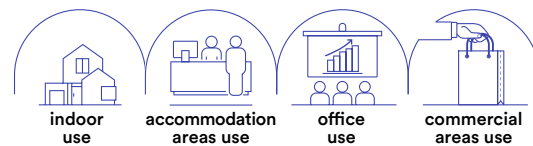

INC-EVA-R1
8031414873609

1 x E27 MAX 35W

Ø 185 mm



Portalamпада incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included


INCASSI / RECESSED LAMPS


In.tec light

SKILIFT

Sistema componibile da incasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra soffitto e corpo illuminante.


Modular recessed system in paintable gypsum to be integrated into the plasterboard to give homogeneity between the ceiling and the lighting body.

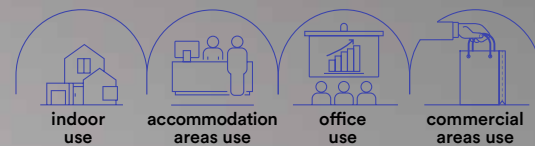

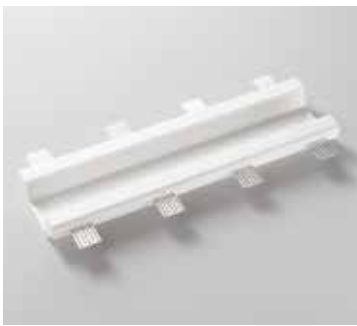


INC-SKILIFT-40CM
8031414884346

 405 × 115 mm

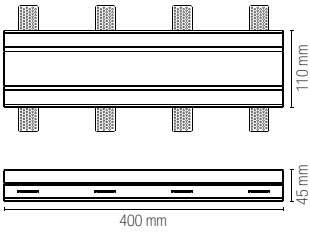



INC-SKILIFT-20CM
8031414884322

 205 × 115 mm




INC-SKILIFT-L16CM
8031414884360

 165 × 165 mm




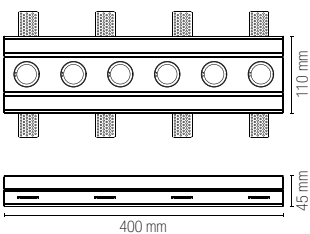
INC-SKILIFT-CAP
8031414886869

 55 × 115 mm





INC-SKILIFT-6
8031414884339

6 x MINI GU10 MAX 35W
bulb size \varnothing 34 mm
 405 × 115 mm




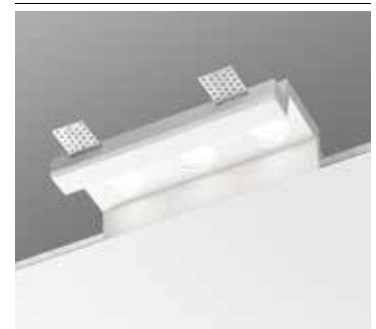

INC-SKILIFT-3
8031414884315

3 x MINI GU10 MAX 35W
bulb size \varnothing 34 mm
 205 × 115 mm



INC-SKILIFT-L3
8031414884353

3 x MINI GU10 MAX 35W
bulb size \varnothing 34 mm
 165 × 165 mm



Portalamпада incluso /
Lampholder included




Lampadina non inclusa /
Light bulb not included

ARIEL

Segnapasso in gesso verniciabile da integrare nel cartongesso per dare omogeneità tra parete e corpo illuminante.


Paintable gypsum wall-light to be integrated into the plasterboard to give homogeneity between the wall and lighting body.

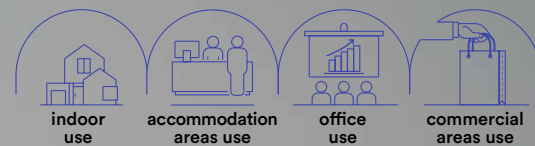




I-ARIEL-QL1
8031434151213

1 x MINI GU10 MAX 35W
bulb size \varnothing 34 mm
115 x 250 x 12 mm





I-ARIEL-RM1
8031434121216

1 x MINI GU10 MAX 35W
bulb size \varnothing 34 mm
125 x 185 x 12 mm



I-ARIEL-RS1
8031434131215

1 x MINI GU10 MAX 35W
bulb size \varnothing 34 mm
105 x 105 x 12 mm

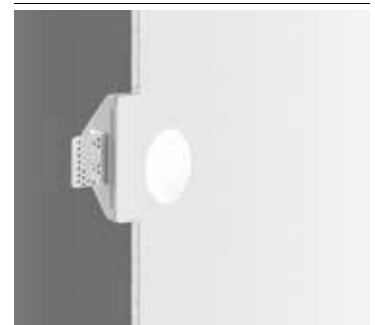


Staffa regolabile /
Adjustable bracket



Portalampana incluso /
Lampholder included




Lampadina non inclusa /
Light bulb not included





I-ARIEL-QL1-BOX
8031414868360

Cassa di derivazione opzionale
per fissaggio a parete in muratura
materiale alluminio /
Aluminum optional recess box
for brickwork recess installation

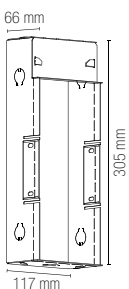


I-ARIEL-RM1-BOX
8031414868384

Cassa di derivazione opzionale
per fissaggio a parete in muratura
materiale alluminio /
Aluminum optional recess box
for brickwork recess installation



I-ARIEL-RS1-BOX
8031414868377


Cassa di derivazione opzionale
per fissaggio a parete in muratura
materiale alluminio /
Aluminum optional recess box
for brickwork recess installation




ANIMA

Applique in gesso verniciabile con leggera sporgenza da integrare nel cartongesso per dare omogeneità tra parte e corpo illuminante.

Wall lamp in paintable gypsum with slight protrusion to be integrated into the plasterboard to give homogeneity between the part and the illuminating body.

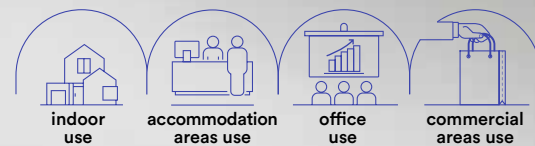



Staffa regolabile /
Adjustable bracket



Portalamпада incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included



I-ANIMA-AP2
8031414861323

2 x E14 MAX 14W
320 x 260 x 90 mm



I-ANIMA-AP2-BOX
8031414868391



Cassa di derivazione opzionale
per fissaggio a parete in muratura
materiale alluminio /
Aluminum optional recess box
for brickwork recess installation

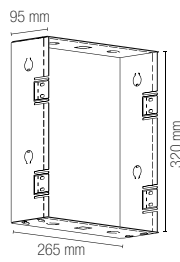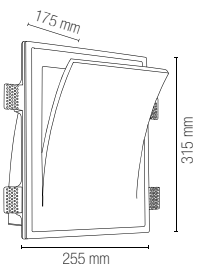

STENOS

Faretto da incasso con struttura in termoplastica orientabile ed antiriflesso.

Recessed spotlight with adjustable and anti-reflective thermoplastic structure.

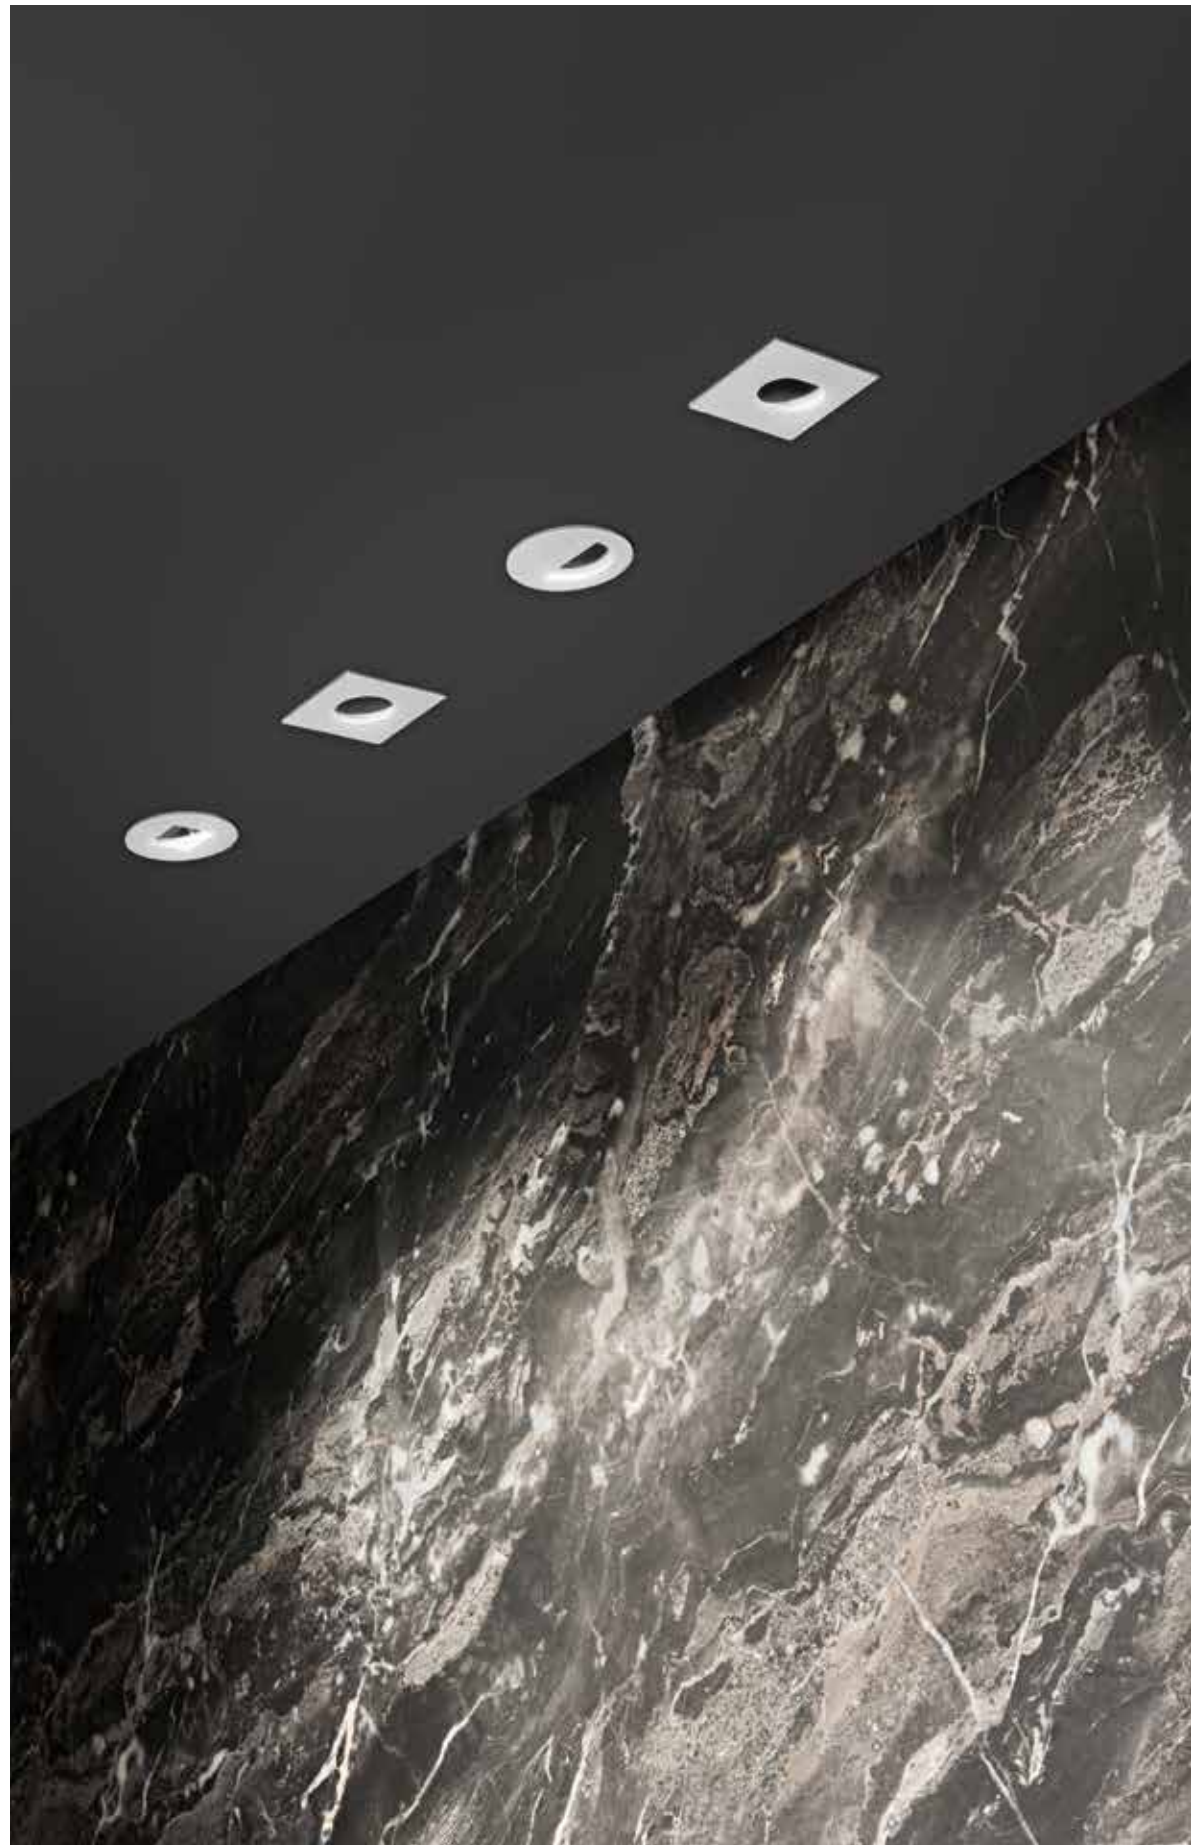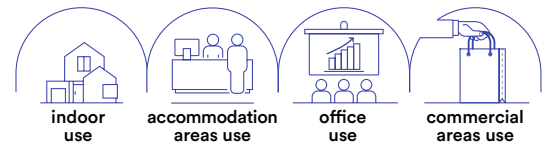



INC-STENOS-R-OV
8031414875818



INC-STENOS-Q-OV
8031414875856



INC-STENOS-R-QU
8031414875832



INC-STENOS-Q-QU
8031414875870



INC-STENOS-R-RO
8031414875801





INC-STENOS-Q-RO
8031414875849



INC-STENOS-R-ML
8031414875825



INC-STENOS-Q-ML
8031414875863

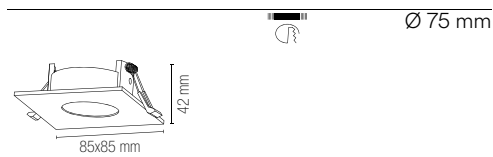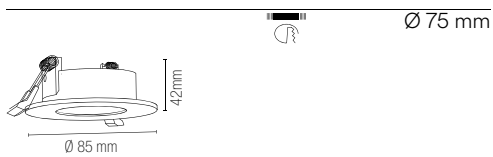


Lampadina
non inclusa /
Light bulb
not included



Portalampada GU10
o MR16 non inclusi/
GU10 or MR16 lamp
holder not included




Lampadina
non inclusa /
Light bulb
not included




Portalampada GU10
o MR16 non inclusi/
GU10 or MR16 lamp
holder not included

VIPER



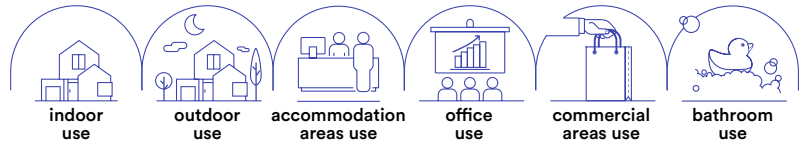

Faretto con struttura in metallo e diffusore in vetro satinato.
Spotlight with metal structure and satin glass diffuser.



Portalampada GU10 o MR16 non inclusi / GU10 or MR16 lamp holder not included



Lampadina non inclusa / Light bulb not included





INC-VIPER-R-BCO
8031414861590

INC-VIPER-R-NIK
8031414861576

colour



Ø 74 mm



Portalampada GU10 o MR16 non inclusi / GU10 or MR16 lamp holder not included



Lampadina non inclusa / Light bulb not included




INC-VIPER-Q-BCO
8031414861866

INC-VIPER-Q-NIK
8031414861873

colour




Ø 74 mm



INCASSI / RECESSED LAMPS

In.tec light

AYRIS

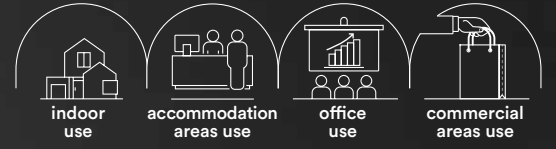



Faretto ad incasso antiriflesso in alluminio nero o bianco goffrato.
Recessed spotlight with anti-reflective in black or white embossed aluminum.




Portalamпада incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included



	colour
INC-AYRIS-R BCO 8031414868216	
INC-AYRIS-R NER 8031414868193	
1 x GU10 MAX 35W	
	Ø 75 mm




Portalamпада incluso /
Lampholder included



Lampadina non inclusa /
Light bulb not included



	colour
INC-AYRIS-Q BCO 8031414868223	
INC-AYRIS-Q NER 8031414868186	
1 x GU10 MAX 35W	
	72 x 72 mm





REFLEX



Incasso in metallo
Metal down light

INC-REFLEX-SF1 BCO
8031439321260



INC-REFLEX-SF1 NER
8031414861552



INC-REFLEX-SF1 CR
8031439301262




INC-REFLEX-SF1 ORO
8031439341268




INC-REFLEX-SF1 NIK
8031439311261




INC-REFLEX-SF1 BR
8031439331269



INC-REFLEX-Q-SF1 BCO
8031414861538

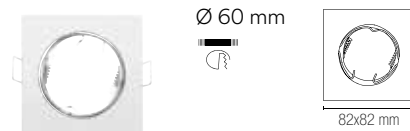

INC-REFLEX-Q-SF1 NER
8031414885053



INC-REFLEX-Q-SF1 NIK
8031414861545



Incasso in metallo orientabile
Metal down light adjustable



INC-REFLEX-SM1 BCO
8031439251260



INC-REFLEX-SM1 NER
8031414861569



INC-REFLEX-SM1 CR
8031439281267



INC-REFLEX-SM1 ORO
8031439271268



INC-REFLEX-SM1 NIK
8031439261269



INC-REFLEX-SM1 BR
8031439291266



INC-REFLEX-Q-SM1 BCO
8031440363310



INC-REFLEX-Q-SM1 NER
8031414885060



INC-REFLEX-Q-SM1 NIK
8031440363280



Lampadina
non inclusa /
Light bulb
not included



Portalampada GU10
o MR16 non inclusi/
GU10 or MR16 lamp
holder not included



Lampadina
non inclusa /
Light bulb
not included



Portalampada GU10
o MR16 non inclusi/
GU10 or MR16 lamp
holder not included

INDOOR



SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE
MULTI-FUNCTION LIGHTING SYSTEM

SHAPE

Barre in PC con connettori
per composizioni personalizzate.

PC bars with connectors
for customized compositions.

Materiale

PC

Colore

bianco



Temperatura colore

4000K / 6500K



Driver

integrato

Material

PC

Colour

white




Colour temperature

4000K / 6500K




Driver

built-in

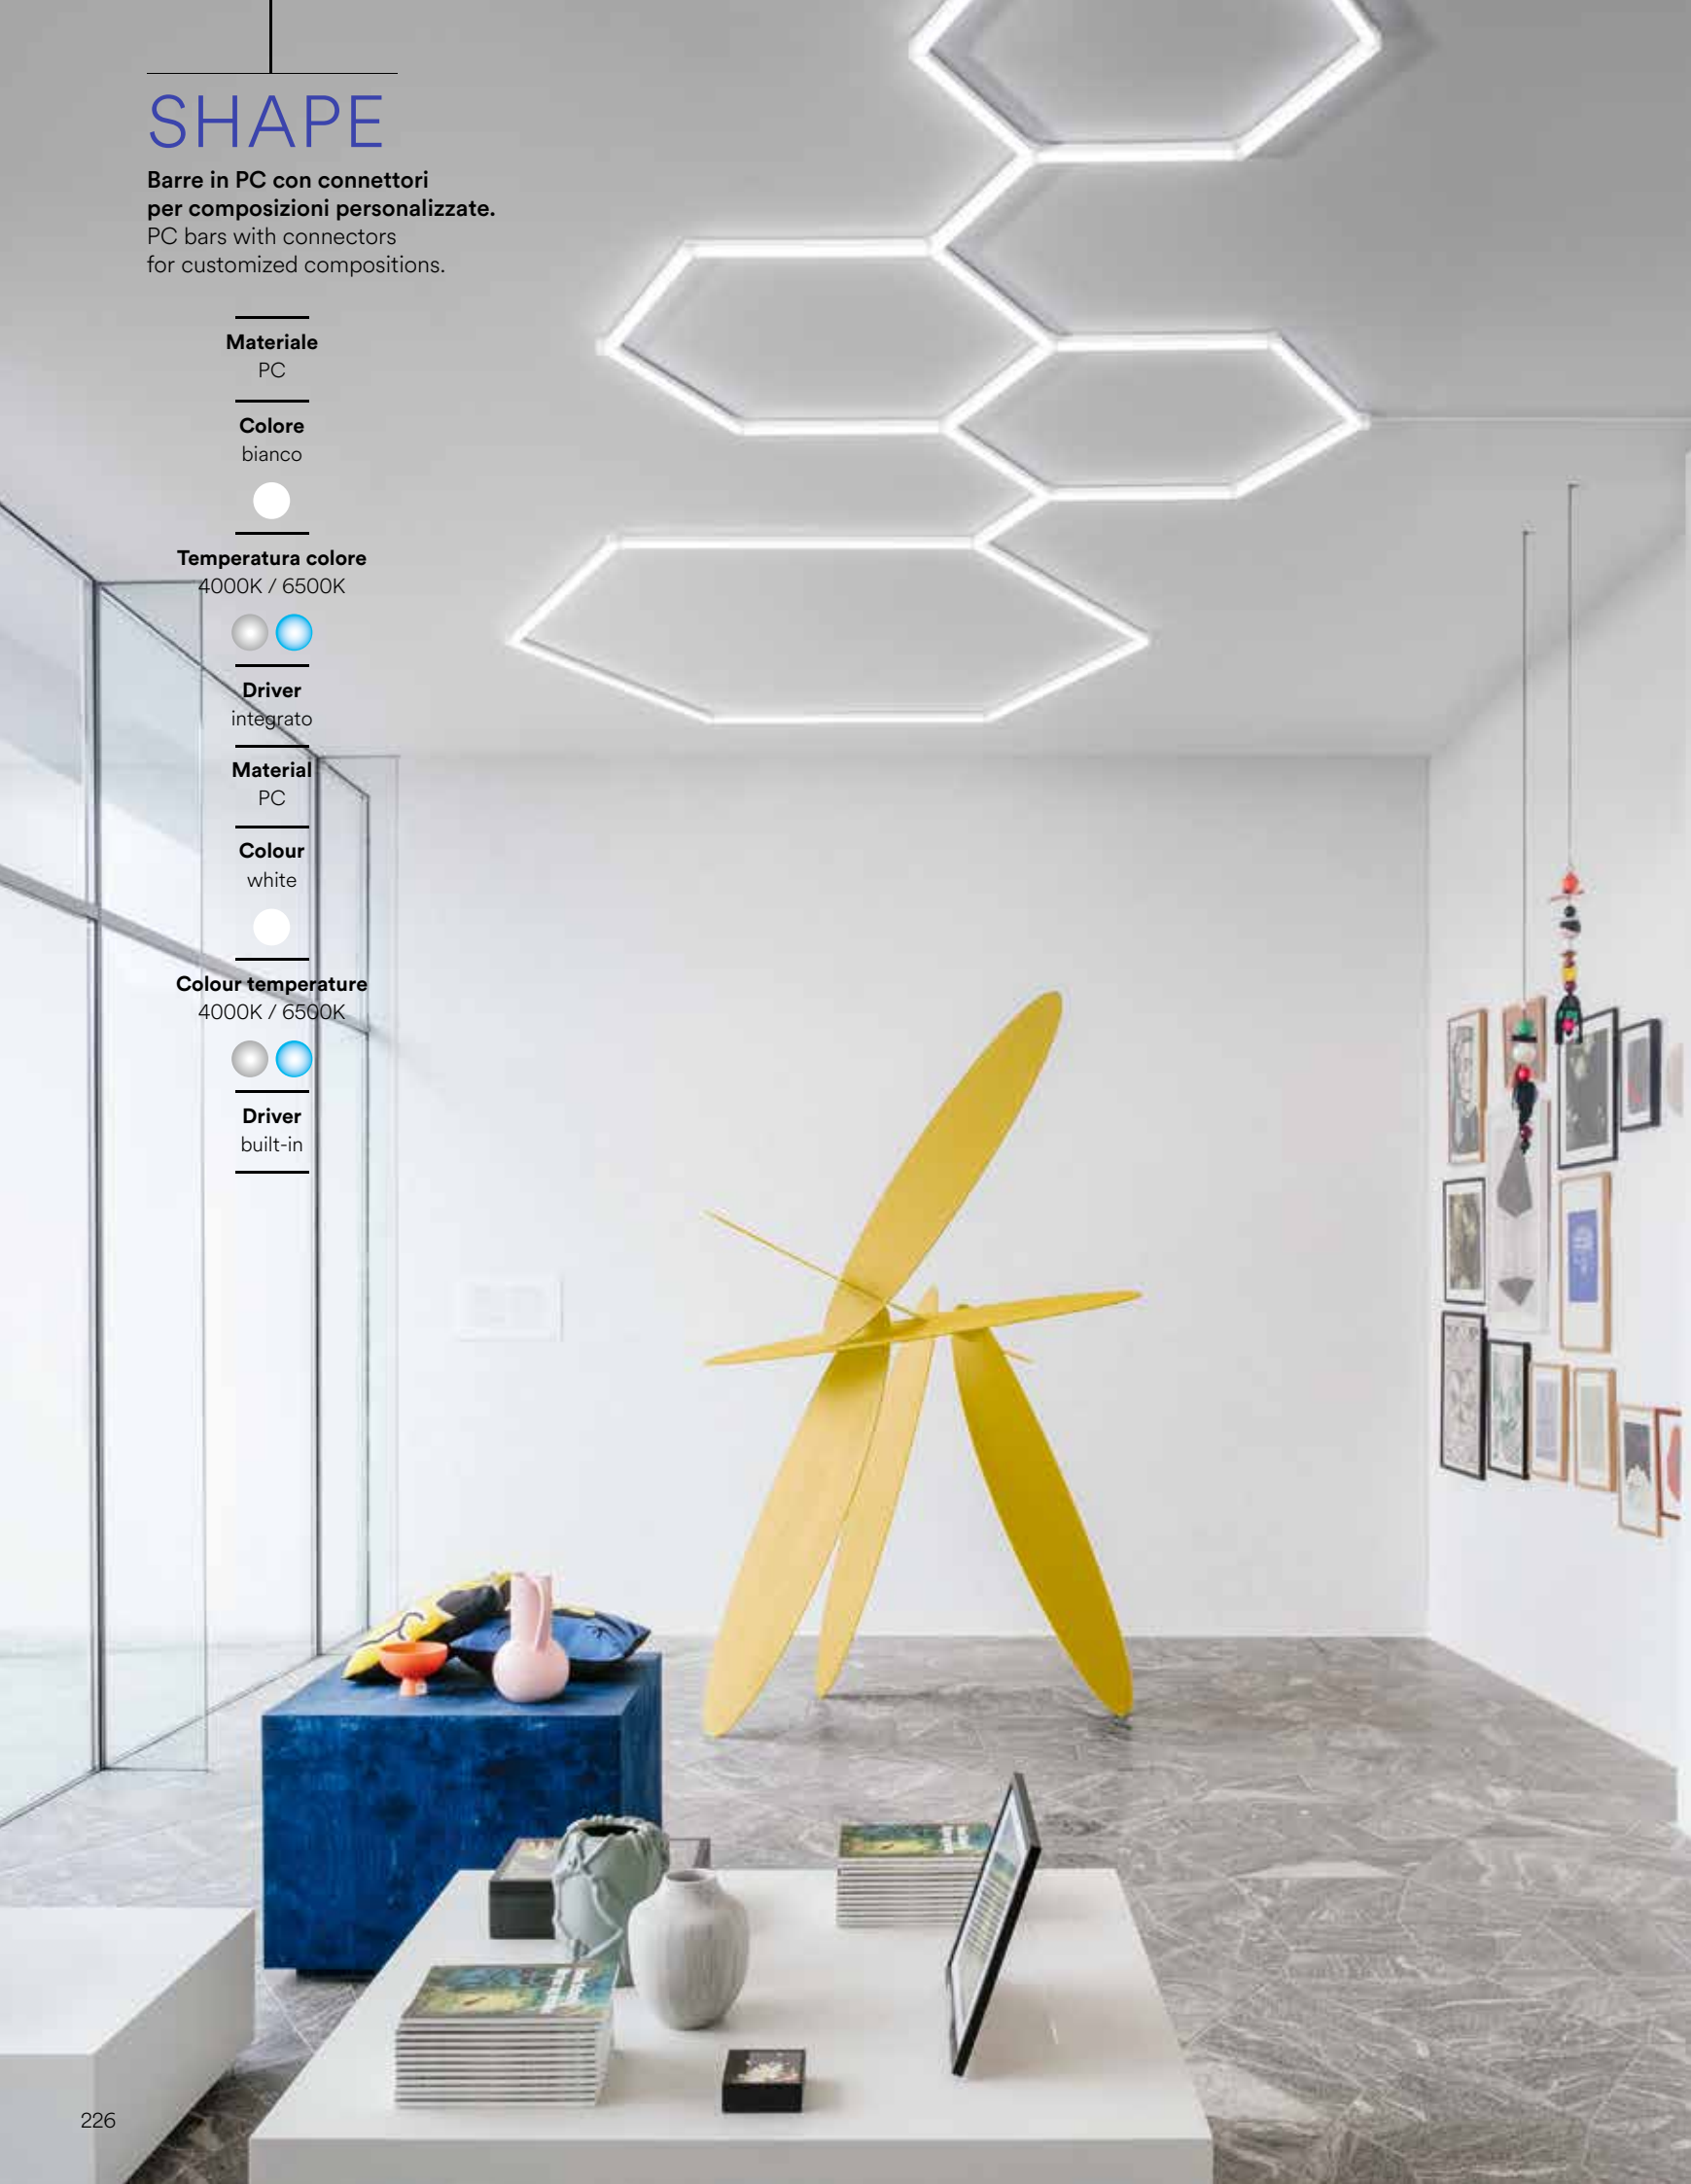



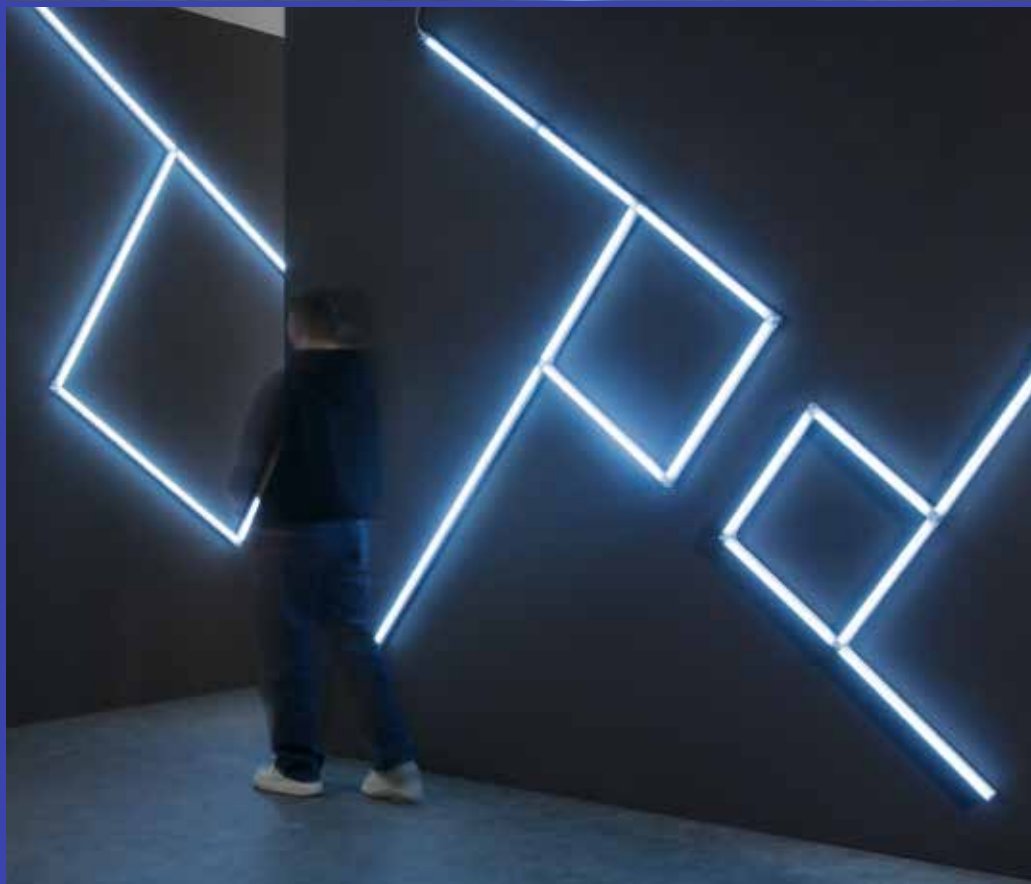



	colour temp.	colour
LEDBAR-SHAPE-44M 8031414925384		
lumen	700 lm	
LEDBAR-SHAPE-44F 8031414925391		
lumen	700 lm	




	colour temp.	colour
LEDBAR-SHAPE-56M 8031414925407		
lumen	900 lm	
LEDBAR-SHAPE-56F 8031414925414		
lumen	900 lm	


	colour temp.	colour
LEDBAR-SHAPE-117M 8031414925421		
lumen	1800 lm	
LEDBAR-SHAPE-117F 8031414925438		
lumen	1800 lm	

watt	7W
beam angle	120°

watt	9W
beam angle	120°

watt	18W
beam angle	120°



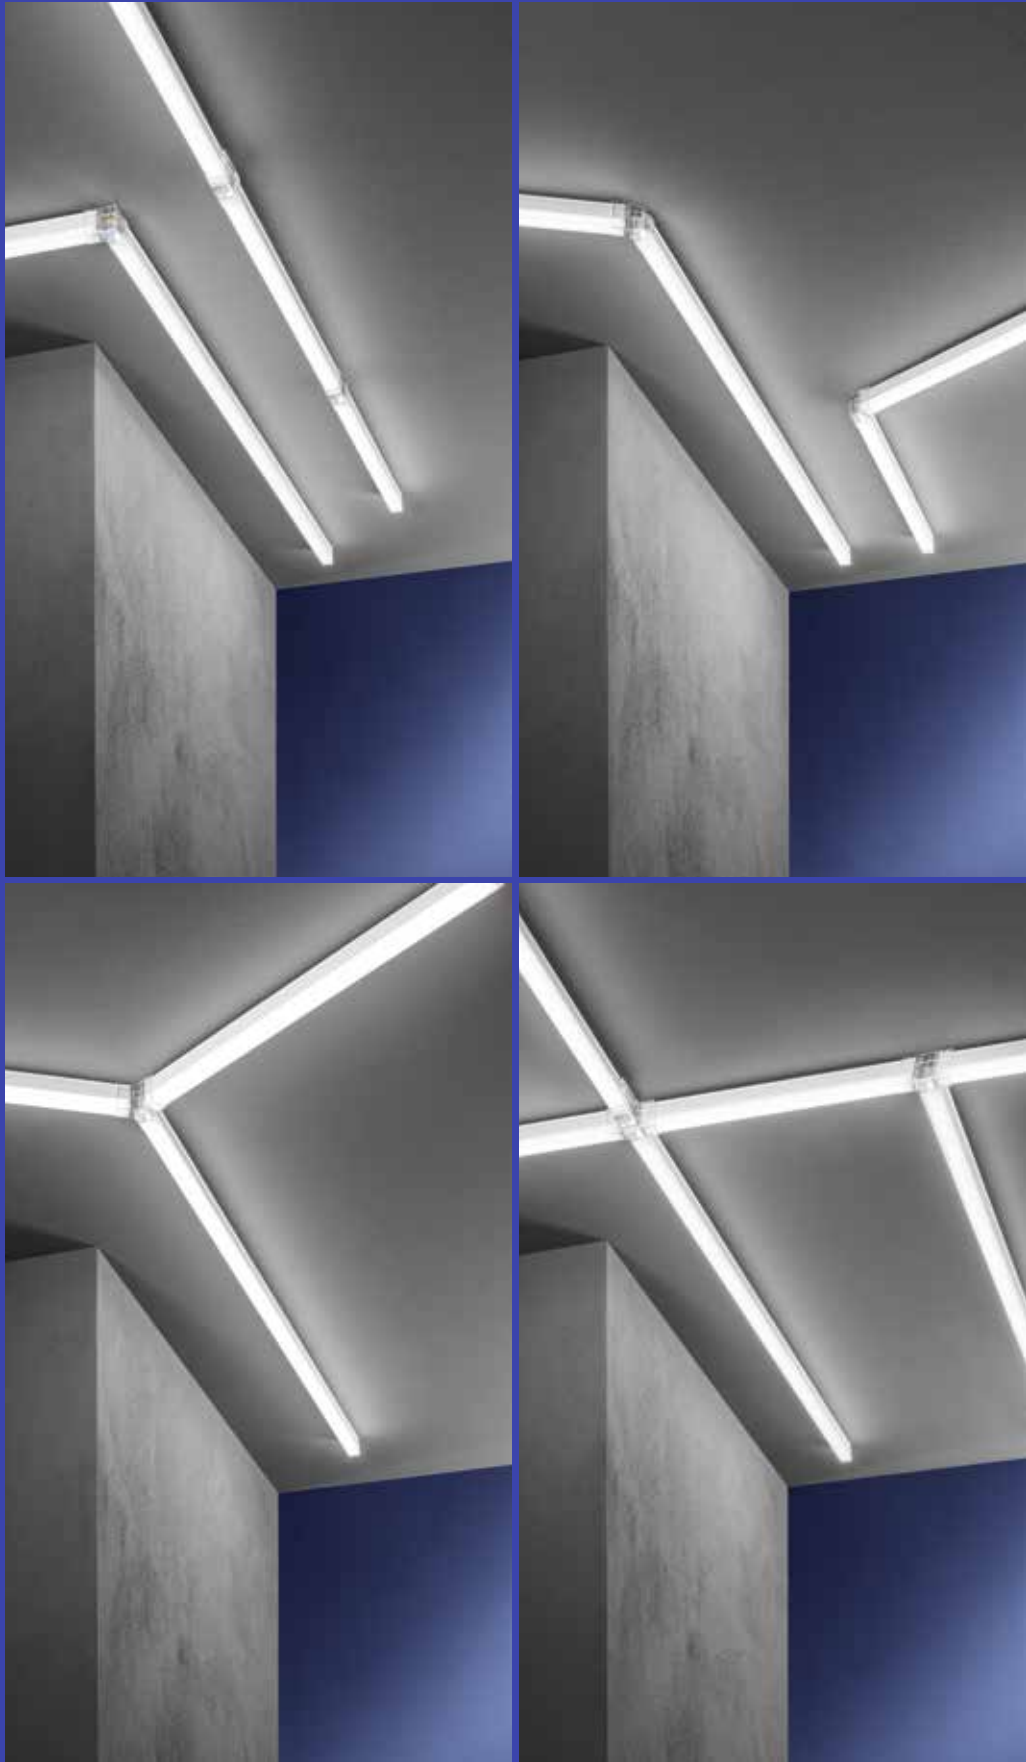

	LEDBAR-SHAPE-I 8031414925445 Connettore lineare Linear connector
	LEDBAR-SHAPE-L 8031414925469 Connettore a L L connector
	LEDBAR-SHAPE-ANG 8031414925452 Connettore angolo 120° 120° edge connector
	LEDBAR-SHAPE-T 8031414925483 Connettore a T T connector
	LEDBAR-SHAPE-T120 8031414925476 Connettore a 3 angoli 120° 3 120° edge connector
	LEDBAR-SHAPE-X 8031414925490 Connettore a X X connector
	LEDBAR-SHAPE-NEST 8031414925506 Innesto elettrico Electrical nest

NEXT

Barra a LED in metallo bianco o nero satinato
con diffusore anti abbagliamento.

Metal LED bar satin white or black finish with antiglare diffuser.




indoor
use



accommodation
areas use



office
use



commercial
areas use

Materiale

metallo

Colore

bianco satinato
nero satinato



Temperatura colore

3000K / 4000K



Driver

incluso

Material

metal

Colour

satin white
satin black



Colour temperature

3000K / 4000K



Driver

included



NEXT

Barra a LED in metallo bianco o nero satinato con diffusore anti abbagliamento.
Metal LED bar satin white or black finish with antiglare diffuser.

Materiale

metallo

Colore

bianco satinato
nero satinato



Temperatura colore
3000K / 4000K



Driver

incluso

Material

metal

Colour

satin white
satin black




Colour temperature
3000K / 4000K




Driver


included

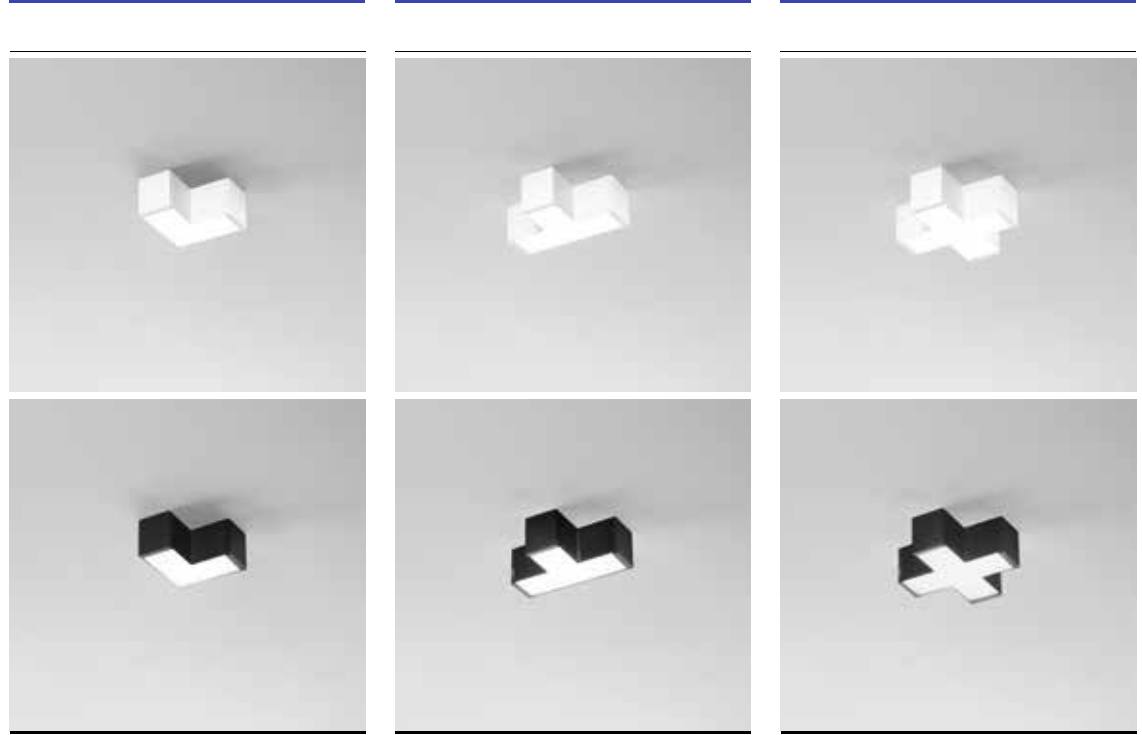


	colour temp.	colour
LED-NEXT-W-L 8031414921782 lumen		
	640 lm	
LED-NEXT-B-L 8031414921775 lumen		
	640 lm	
watt	8W	
beam angle	100°	
pf	-	



	colour temp.	colour
LED-NEXT-W-T 8031414921768 lumen		
	800 lm	
LED-NEXT-B-T 8031414921751 lumen		
	800 lm	
watt	10W	
beam angle	100°	
pf	-	




	colour temp.	colour
LED-NEXT-W-X 8031414921744 lumen		
	960 lm	
LED-NEXT-B-X 8031414921737 lumen		
	960 lm	
watt	12W	
beam angle	100°	
pf	-	






	colour temp.	colour
LED-NEXT-W-60 8031414921645 lumen		
	1920 lm	
LED-NEXT-B-60 8031414921638 lumen		
	1920 lm	

watt	24W
beam angle	100°
pf	0.90




	colour temp.	colour
LED-NEXT-W-90 8031414921669 lumen		
	2880 lm	
LED-NEXT-B-90 8031414921652 lumen		
	2880 lm	

watt	36W
beam angle	100°
pf	0.90



	colour temp.	colour
LED-NEXT-W-200 8031414921683 lumen		
	6400 lm	
LED-NEXT-B-200 8031414921676 lumen		
	6400 lm	

watt	80W
beam angle	100°
pf	0.90



Accessori inclusi / Included accessories



Connettore / Connector



Staffa per montaggio a plafoniera / Ceiling mounting brackets

Accessori inclusi / Included accessories



Connettore / Connector



Staffa per montaggio a plafoniera / Ceiling mounting brackets

Accessori inclusi / Included accessories




Connettore / Connector



Staffa per montaggio a plafoniera / Ceiling mounting brackets


NEXT

Barra a LED in metallo bianco o nero satinato con diffusore anti abbagliamento.
Metal LED bar satin white or black finish with antiglare diffuser.

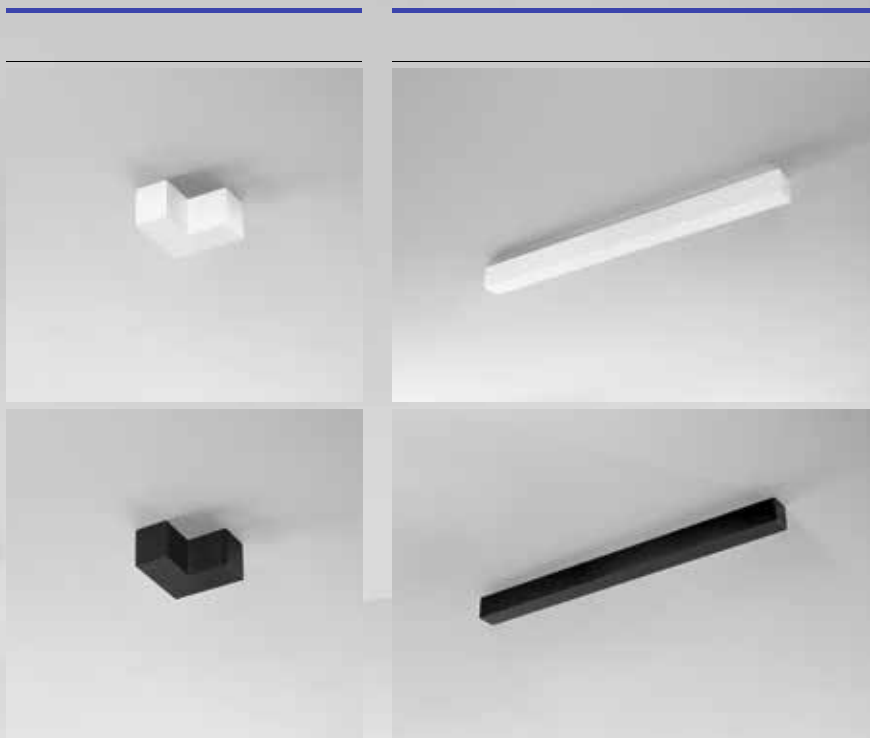

Barre NEXT senza sorgente luminosa per creare "tratti bui" /
NEXT bar without light source to create "dark lines".

	colour		colour
LED-NEXT-W-ST-L 8031414921720	●	LED-NEXT-W-ST60 8031414921706	●
LED-NEXT-B-ST-L 8031414921713	●	LED-NEXT-B-ST60 8031414921690	●



Accessori inclusi / Included accessories



Connettore /
Connector



Staffa per montaggio a plafoniera /
Ceiling mounting brackets



LED-NEXT-W-FIX

8031414921850

Staffa per fissaggio bianca White fixing bracket



LED-NEXT-B-FIX

8031414921799

Staffa per fissaggio nera Black fixing bracket



LED-NEXT-W-S

8031414921812

Kit sospensione bianco Suspension kit white color



LED-NEXT-B-S

8031414921805

Kit sospensione nera Suspension kit black color



LED-NEXT-PL-FIX

8031414921843

Kit per fissaggio a plafoniera Ceiling mounting kit



SEGMENTO

Supporto lineare modulare in acciaio rivestito in silicone nero.

Modular linear support in steel and coated in black silicone.





indoor
use



accommodation
areas use



office
use



commercial
areas use



SISTEMI D'ILLUMINAZIONE MULTIFUNZIONE / MULTI-FUNCTION LIGHTING SYSTEM

In.tec light



Supporto lineare modulare in acciaio rivestito in silicone nero.
Modular linear support in steel and coated in black silicone.



Strip LED non inclusa / Strip LED not included


Kit completo / Complete kit



I-SEGMENTO-6M

8031414882458

Kit base 6 m con nastro tagliabile, arnesi, set di 2 basette ed accessori / 6 m basic kit with cuttable ribbon, tool kit, set of 2 bases and accessories

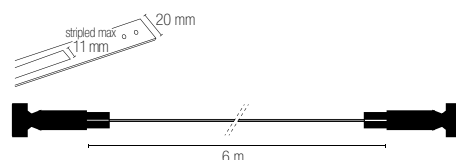

Elementi singoli per comporre il kit / Single elements to compose the kit


Servizio customizzato taglio su misura / Customized cut service



I-SEGMENTO-1M

8031414882441

TAGLIO 1 M NASTRO Indicare la misura desiderata nelle note del B2B (multipli di 1 metro) / 1 M TAPE CUT Indicate the desired size in the B2B notes (multiples of 1 meter)

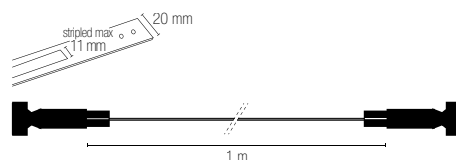

I-SEGMENTO-BASE

8031414894307


Base per piantana SEGMENTO / Base for SEGMENTO floor lamp



I-SEGMENTO-FIX

8031414882465

Set di 2 basette ed accessori / Set of 2 bases and accessories




I-SEGMENTO-TOOL

8031414882472

Kit arnese / Tool kit

METRO

Sistema cavi tesi con finitura cromo.
Wire system chrome system.

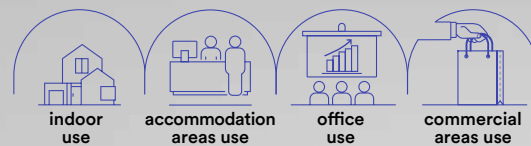


LED-METRO-5

8031414862139

5 x MR16 MAX 9W
Driver 50W included

5 m cable included

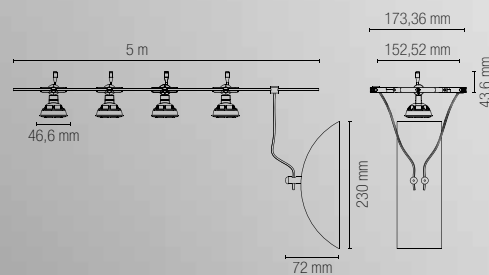

I-WIRE-10M

8031414870387

Cavo 10 m / 10 m cable



Lampadina non inclusa /
Light bulb not included



PANEL PRO

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.

LED panel with aluminum structure and white acrylic diffuser.



indoor use



accommodation areas use



office use



commercial areas use





Materiale
alluminio,
diffusore in PMMA

Colore
bianco

Temperatura colore
3000K / 4000K / 6500K



Driver
incluso

Material
aluminum,
PMMA diffuser

Colour
white

Colour temperature
3000K / 4000K / 6500K



Driver
included



LED-PANEL-60X60-PRO

8031414904822

lumen

colour temp.

colour




4600 lm

watt 40W


beam angle 120°

pf 0.90

590 × 590 mm



Fotometria del prodotto / Photometric curve



LED-PANEL-60X60-PRO



LED-PANEL-30X120-PRO

8031414904839

lumen

colour temp.

colour





4600 lm

watt 40W

beam angle 120°

pf 0.90

290 × 1190 mm

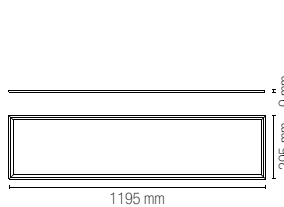


LED-PANEL-30X120-PRO

Accessorio incluso / Included accessory




Cavo di sicurezza per Panel Backlight 1,5 m / Safety cable for Panel Backlight 1,5 m

LOOP-IN & LOOP-OUT linkable connection

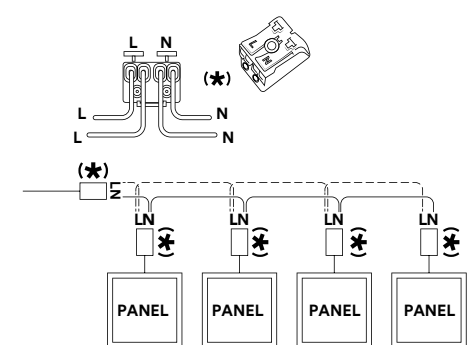

PANEL BK CCT

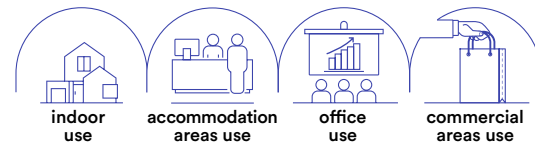

Materiale
alluminio,
diffusore in acrilico

Colore
bianco



Temperatura colore
3000K / 4000K / 6500K



Driver
incluso

Material
aluminum,
acrylic diffuser

Colour
white




Colour temperature
3000K / 4000K / 6500K



Driver
included

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.

LED panel with aluminum structure and white acrylic diffuser.



LED-PANEL-60X120BK-CCT

8031414918201

lumen

colour temp.



6000 lm

colour




watt 60W


beam angle 120°

pf 0.90

590 × 1190 mm

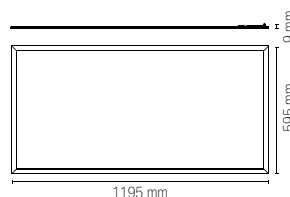

Fotometria del prodotto / Photometric curve




LED-PANEL-60X120BK



PANEL BK

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.

LED panel with aluminum structure and white acrylic diffuser.

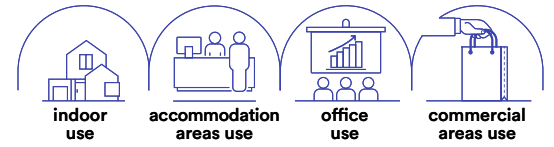

Materiale
alluminio,
diffusore in acrilico

Colore
bianco



Temperatura colore
3000K / 4000K / 6000K



Driver
incluso

Material
aluminum,
acrylic diffuser

Colour
white



Colour temperature
3000K / 4000K / 6000K



Driver
included





LED-PANEL-C-60X60BK

8031414885046

lumen

colour temp. | colour



4800 lm

LED-PANEL-60X60BK

8031414874323

lumen



4800 lm


LED-PANEL-F-60X60BK

8031414874347

lumen



4800 lm



watt	40W
beam angle	120°
pf	0.90
	590 × 590 mm



LED-PANEL-C-30X120BK

8031414916177

lumen

colour temp. | colour



4800 lm

LED-PANEL-30X120BK

8031414874316

lumen



4800 lm


LED-PANEL-F-30X120BK

8031414874330

lumen




4800 lm

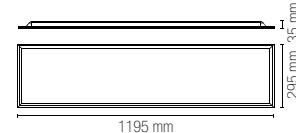


watt	40W
beam angle	120°
pf	0.90
	290 × 1190 mm

Fotometria del prodotto / Photometric curve




LED-PANEL-60X60 BK



LED-PANEL-30X120 BK

PANEL RGB
PANEL IP65

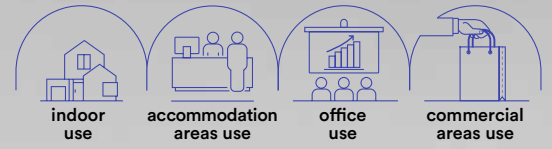

Materiale
alluminio,
diffusore in acrilico

Colore
bianco



Driver
incluso

Dimmer
dimmerabile
con radiocomando
incluso

Material
aluminum,
acrylic diffuser

Colour
white



Driver
included

Dimmer
dimmable with radio
frequency remote control
included

PANEL RGB


Pannello a LED con struttura in alluminio, diffusore in acrilico e finitura in bianco. Sistema di variazione colorazione luce RGB e luce bianca, con radiocomando incluso.
LED panel with aluminum structure, acrylic diffuser and white finish. RGB and natural white light adjustable with radio frequency remote control included.



LED-PANEL-60x60-RGBW
8031414861064

colour temp. | colour
RGB + 4000K
4150 lm

watt	40W
beam angle	120°
pf	0.90
	590 x 590 mm



Materiale
alluminio,
diffusore in PMMA

Colore
bianco



Temperatura colore
4000K



Driver
incluso

Material
aluminum,
PMMA diffuser

Colour
white



Colour temperature
4000K



Driver
included

PANEL IP65


Pannello LED UGR<19 e IP65.
LED panel UGR<19 and IP65.



LED-PANEL-60X60-IP65
8031414876303

colour temp. | colour
3240 Lm


watt	36W
beam angle	120°
pf	0.90
	590 x 590 mm



Accessorio incluso /
Included accessory


Telecomando incluso /
Remote control included

Fotometria del prodotto /
Photometric curve



LED-PANEL-60x60-RGBW


Fotometria del prodotto /
Photometric curve



LED-PANEL-60X60 IP65 UGR

PANEL FR / EDG

Pannello LED a cornice luminosa.
LED panel with light frame.

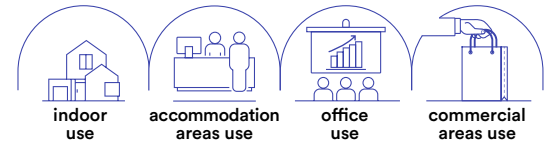

Materiale
alluminio,
diffusore in PMMA

Colore
bianco

Temperatura colore
CCT



Driver
incluso


Material
aluminum,
PMMA diffuser

Colour
white

Colour temperature
CCT



Driver
included


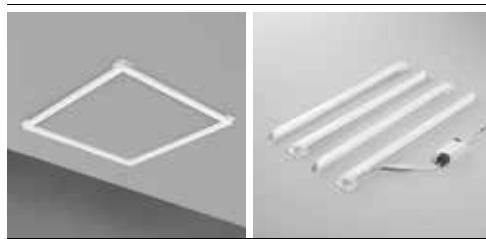


LED-PANEL-60X60-FR
8031414897643

colour temp. CCT
5000 lm

lumen

watt 40W
beam angle 120°
pf 0.90
590 x 590 mm

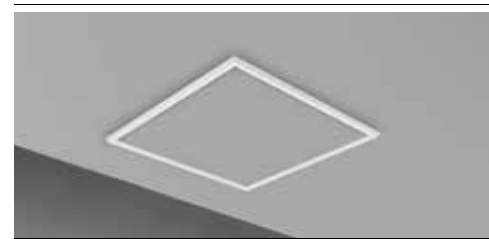


LED-PANEL-60X60-EDG
8031414897650


colour temp. CCT
4200 lm

lumen


watt 42W
beam angle 120°
pf 0.90
590 x 590 mm



Fotometria del prodotto /
Photometric curve




LED-PANEL-60X60-FR



LED-PANEL-60X60-EDG

PANEL SM

Pannello a LED, fissaggio easy a soffitto.
LED panel, easy ceiling fixing.

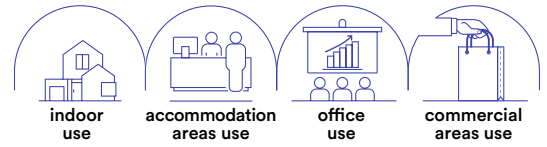

indoor use

accommodation areas use

office use

commercial areas use

Materiale
alluminio,
diffusore in PMMA

Colore
bianco



Temperatura colore
4000K



Driver
incluso

Material
aluminum,
PMMA diffuser

Colour
white



Colour temperature
4000K



Driver
included



LED-PANEL-60X60-SM

8031414897599



lumen

colour temp. colour
4000 lm

watt 24W
beam angle 120°
pf 0.90



590 × 590 mm

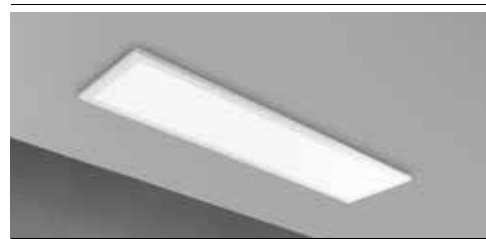

LED-PANEL-30X120-SM

8031414897605


lumen

colour temp. colour
4000 lm


watt 24W
beam angle 120°
pf 0.90




290 × 1190 mm

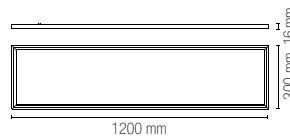

Fotometria del prodotto /
Photometric curve



LED-PANEL-60X60-SM



LED-PANEL-30X120-SM

PANEL BIS

Pannello a LED con struttura in alluminio e diffusore in acrilico bianco.
LED panel with aluminum structure, acrylic diffuser and white finish.

Materiale

alluminio,
diffusore in acrilico

Colore

bianco



Temperatura colore

4000K



Driver

incluso

Material

aluminum,
acrylic diffuser

Colour

white



Colour temperature


4000K



Driver

included





LED-PANEL-60X60-BIS

8031414865383

lumen

colour temp.	colour

5400 lm
(↓ 2800 lm + 2800 lm ↑)

watt


40W

beam angle

↓ 120° + 120° ↑

pf

0.90



LED-PANEL-30X120-BIS

8031414865376

lumen

colour temp.	colour

5600 lm
(↓ 2700 lm + 2700 lm ↑)

watt


40W

beam angle


↓ 120° + 120° ↑

pf


0.90

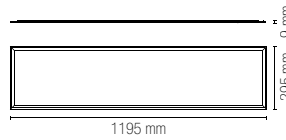

Fotometria del prodotto / Photometric curve




LED-PANEL-60X60-BIS


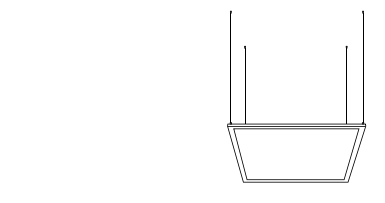

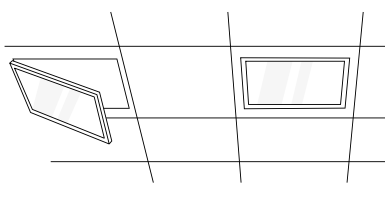

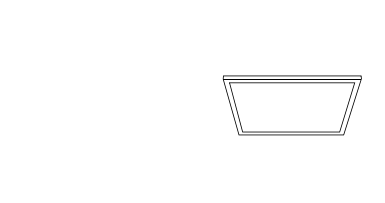

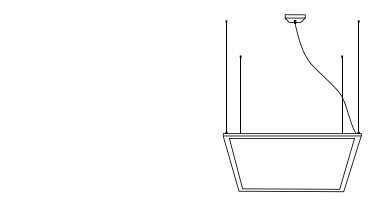






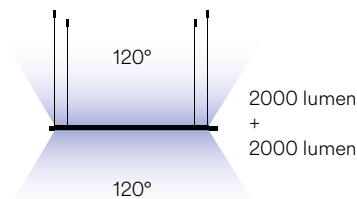

LED-PANEL-30X120-BIS

Accessorio incluso / Included accessory

Kit cavi acciaio ed elettrico 1,5 m / steel hanging cable and electric cable 1,5 m



	<p>LED-PANEL-KIT 8031440352451</p> <p>Kit 6 cavi 150 cm in acciaio per sospensione.</p> <p>Steel cable kit 150 cm for suspension.</p>	
	<p>LED-PANEL-GANCI 8031440361903</p> <p>Kit molle 4pz.</p> <p>Metal spring kit 4pcs.</p>	
	<p>LED-PANEL-STAFFE 8031414866175</p> <p>Kit 6 staffe in acciaio per pannello LED.</p> <p>Steel fixing bars for LED panel.</p>	
	<p>LED-PANEL-BASE 8031414866236</p> <p>Base a soffitto per driver pannello LED misura: 160 x 110 x 35 mm</p> <p>Metal canopy base for LED panel size: 160 x 110 x 35 mm</p>	
	<p>LED-PANEL-SOSP 8031440361781</p> <p>Kit sospensione pannello cavo 1,5 m + scatola di connessione elettrica a soffitto misura: 120 x 120 x 60 mm</p> <p>Kit for suspension with 1,5 m cable + metal canopy with electric connection size: 120 x 120 x 60 mm</p>	
	<p>LED-PANEL-DR 8031414889082</p> <p>PANEL-DR Output 45W 1000mA 45VDC Input 230VAC misura: 141 x 38 x 28 mm</p> <p>PANEL-DR Output 45W 1000mA 45VDC Input 230VAC size: 141 x 38 x 28 mm</p>	
	<p>LED-PANEL-DR-SLIM 8031414888412</p> <p>PANEL-DR-SLIM Output 45W 1050mA 27-42V Input 220~240VAC misura: 265 x 23 x 20,5 mm</p> <p>PANEL-DR-SLIM Output 45W 1050mA 27-42V Input 220~240VAC size: 265 x 23 x 20,5 mm</p>	
	<p>LED-PANEL-DR-SLIM-DIM 8031414888429</p> <p>PANEL-DR-SLIM-DIM Output 45W 1050mA 27-42V Input 220~240VAC 0-10V DIMM misura: 265 x 23 x 22,3 mm</p> <p>PANEL-DR-SLIM-DIM Output 45W 1050mA 27-42V Input 220~240VAC 0-10V DIMM size: 265 x 23 x 22,3 mm</p>	
	<p>LED-PANEL-SAFETY 8031414904860</p> <p>Cavo di sicurezza per Panel Backlight 1,5 m /</p> <p>Safety cable for Panel Backlight 1,5 m</p>	

Strutture in alluminio per montaggio a plafoniera per pannello LED.

Aluminum structures for panel light surface mount.



LED-PANEL-60X60-MT

8031414866212


Struttura per pannello LED, finitura bianco gofrato

Aluminum frame for LED panel, embossed white

colour



Misure dimensioni mm / Size mm



LED-PANEL-60X60-MT GR

8031414871452

Struttura per pannello LED, finitura grigio gofrato

Aluminum frame for LED panel, embossed grey

colour



LED-PANEL-60X60-MT NER

8031414871469

Struttura per pannello LED, finitura nero gofrato

Aluminum frame for LED panel, embossed black

colour




LED-PANEL-60X120-MT

8031414869176

Struttura per pannello LED, finitura bianco gofrato

Aluminum frame for LED panel, embossed white

colour

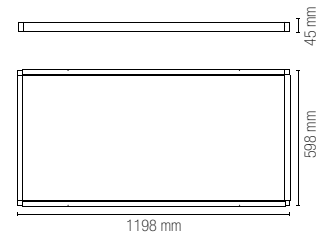


LED-PANEL-60X120-MT GR

8031414871506

Struttura per pannello LED, finitura grigio gofrato

Aluminum frame for LED panel, embossed grey

colour

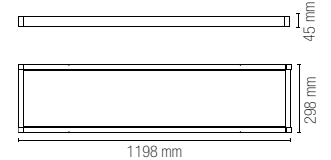

LED-PANEL-60X120-MT NER

8031414871476

Struttura per pannello LED, finitura nero gofrato

Aluminum frame for LED panel, embossed black

colour



LED-PANEL-30X120-MT

8031414866199

Struttura per pannello LED, finitura bianco gofrato

Aluminum frame for LED panel, embossed white

colour



LED-PANEL-30X120-MT GR

8031414871506

Struttura per pannello LED, finitura grigio gofrato

Aluminum frame for LED panel, embossed grey


colour



PANEL-DJ

Pannello a LED con struttura in alluminio e diffusore in acrilico. Sistema di variazione gradi Kelvin e di intensità regolabili con radiocomando incluso e speaker bluetooth.

LED panel with aluminum structure, acrylic diffuser and white finish. Adjustable Kelvin and luminous flux with radio frequency remote control included and speaker bluetooth.

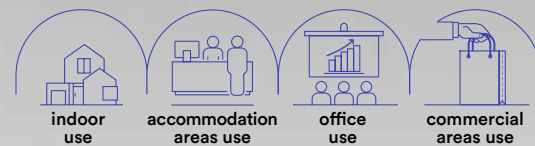

Materiale

alluminio,
diffusore in acrilico

Colore

bianco



Temperatura colore

CCT



Driver

incluso

Dimmer

dimmerabile
con radiocomando
incluso

Material

aluminum,
acrylic diffuser

Colour

white



Colour temperature

CCT




Driver

included

Dimmer

dimmable with radio
frequency remote control
included



LED-PANEL-60X60-DJ

8031414876242


lumen

colour temp. | colour



CCT
1840 lm

watt 42W
beam angle 120°



SPEAKER

2x5W connessione bluetooth 4.2 max 10 m /
2x5W bluetooth 4.2 connection max 10 m



LED-PANEL-30X60-DJ

8031414876259


lumen

colour temp. | colour



CCT
3360 lm


watt 23W
beam angle 120°




SPEAKER

2x5W connessione bluetooth 4.2 max 10 m /
2x5W bluetooth 4.2 connection max 10 m

Fotometria del prodotto / Photometric curve



LED-PANEL-60X60-DJ



LED-PANEL-30X60-DJ


Accessorio incluso / Included accessory



Radiocomando / Remote control

Dimmerabile con radiocomando / Dimmable with radio frequency remote control


INDOOR

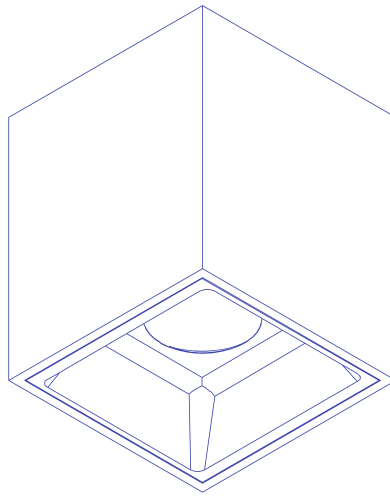

APPLIQUE E PLAFONIERE
WALL LAMPS AND CEILING LAMPS

KLIO CCT

Plafoniera a LED con struttura in alluminio pressofuso e diffusore in acrilico.
LED ceiling lamp with die-cast aluminum structure and acrylic diffuser.

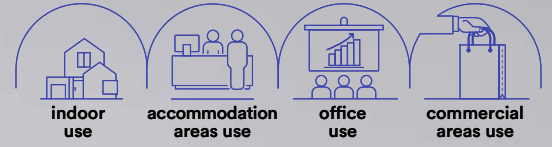

Materiale
alluminio,
diffusore in acrilico

Material
aluminum,
acrylic diffuser

Colore
bianco goffrato

Colour
embossed white



Temperatura colore
3000K / 4000K

Colour temperature
3000K / 4000K




Driver
incluso


Driver
included




Fotometria del prodotto / Photometric curve




LED-KLIO-R11
LED-KLIO-Q11




LED-KLIO-R17
LED-KLIO-Q17





LED-KLIO-R21
LED-KLIO-Q21





LED-KLIO-R40
LED-KLIO-Q40

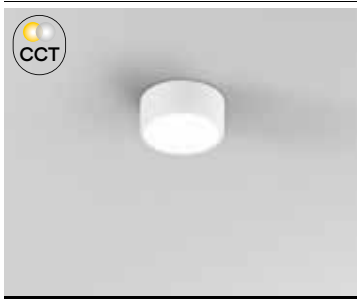


LED-KLIO-R11 8031440358675	colour temp.	colour
	2000 lm	
watt	16W	
beam angle	120°	
pf	-	

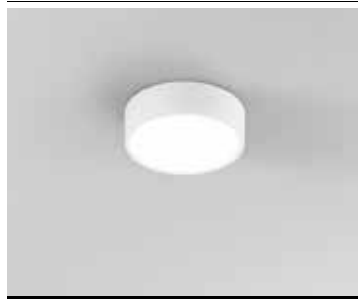



LED-KLIO-R17 8031440363587	colour temp.	colour
	3000 lm	
watt	22W	
beam angle	120°	
pf	-	

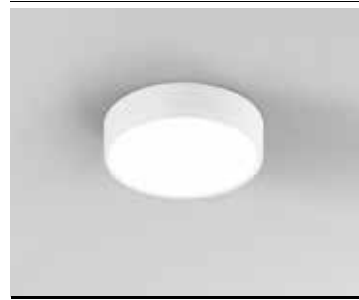



LED-KLIO-R21 8031440363594	colour temp.	colour
	4600 lm	
watt	36W	
beam angle	120°	
pf	0.90	





LED-KLIO-R40C 8031414875740	colour temp.	colour
	7800 lm	
LED-KLIO-R40 8031414868087	colour temp.	colour
	7800 lm	
watt	64,8W	
beam angle	120°	
pf	0.90	

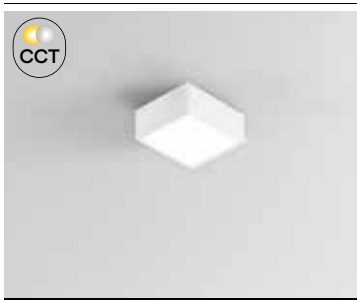



LED-KLIO-Q11 8031440363563	colour temp.	colour
	2000 lm	
watt	16W	
beam angle	120°	
pf	-	

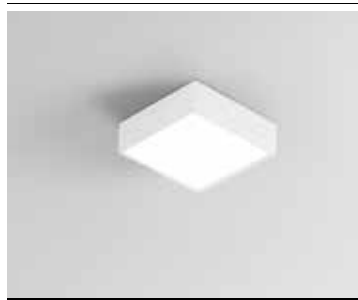


LED-KLIO-Q17 8031440363570	colour temp.	colour
	3000 lm	
watt	22W	
beam angle	120°	
pf	-	

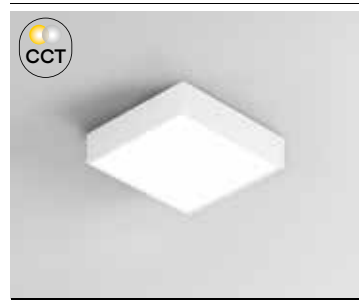

LED-KLIO-Q21 8031440363549	colour temp.	colour
	4600 lm	
watt	36W	
beam angle	120°	
pf	0.90	

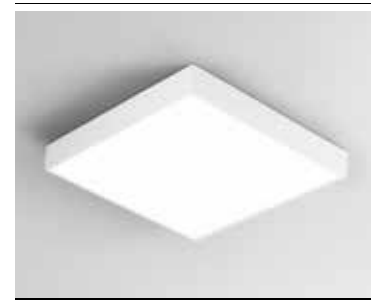


LED-KLIO-Q40C 8031414875702	colour temp.	colour
	7800 lm	
LED-KLIO-Q40 8031414868070	colour temp.	colour
	7800 lm	
watt	64,8W	
beam angle	120°	
pf	0.90	



MIG

Plafoniera a LED anti-abbagliamento con struttura in alluminio.

Anti-glare LED ceiling lamp with aluminum structure.

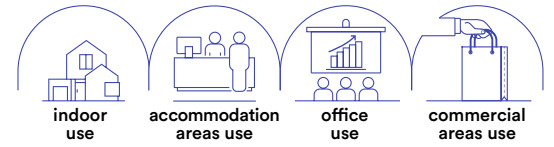

Materiale

struttura in alluminio
riflettore in acrilico

Colore

bianco goffrato con
riflettore bianco lucido,
nero goffrato con
riflettore nero lucido



Temperatura colore selezionabile

3000K / 4000K



Driver

incluso

Durata e on/off

50.000 h >25.000 on/off

Material

aluminum structure
with acrylic reflector

Colour

embossed white with
glossy white reflector,
embossed black with
glossy black reflector



Selectable color temperature

3000K / 4000K



Driver

included


Lifetime and on/off

50.000 h >25.000 on/off







	colour temp.	colour
LED-MIG-R-BCO 8031414924288 lumen		
LED-MIG-R-NER 8031414924295 lumen		
watt	20W	
beam angle	45°	
pf	0.90	



	colour temp.	colour
LED-MIG-Q-BCO 8031414924264 lumen		
LED-MIG-Q-NER 8031414924271 lumen		
watt	20W	
beam angle	45°	
pf	0.90	




Fotometria del prodotto / Photometric curve

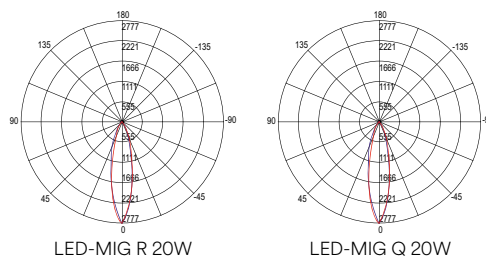

GENESIS

Plafoniera orientabile con struttura
in alluminio bianco o nero opaco.

Adjustable ceiling lamp with aluminum
structure in matt white and black.

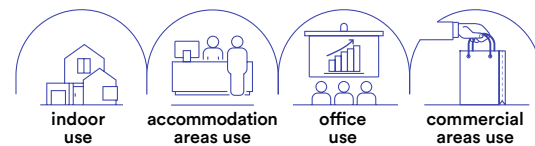



colour



I-GENESIS-R6-BCO
8031414883202



1 x GU10 MAX 35W

colour



I-GENESIS-R6-NER
8031414883219

1 x GU10 MAX 35W




Lampadina non inclusa /
Light bulb not included

TOWN

Plafoniera con struttura in alluminio bianco o nero opaco.

Ceiling lamp with aluminum structure in matt white and black.

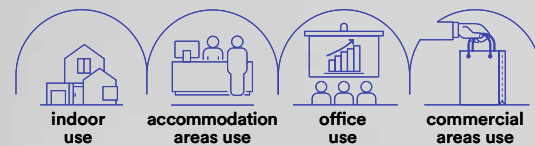



I-TOWN-R BCO

8031414868179

I-TOWN-R NER



8031414868162

colour



Lampadina non inclusa /
Light bulb not included

1 x GU10 MAX 35W

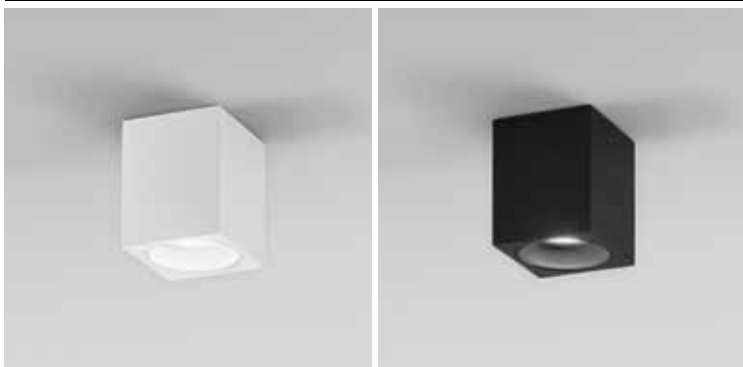

I-TOWN-Q BCO

8031414868155

I-TOWN-Q NER


8031414868148

colour



Lampadina non inclusa /
Light bulb not included

1 x GU10 MAX 35W



I-TOWN-R2 BCO

8031414883189

I-TOWN-R2 NER


8031414883196

colour



Lampadina non inclusa /
Light bulb not included

2 x GU10 MAX 35W

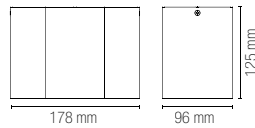

I-TOWN-Q2 BCO

8031414883165

I-TOWN-Q2 NER


8031414883172

colour




Lampadina non inclusa /
Light bulb not included

2 x GU10 MAX 35W

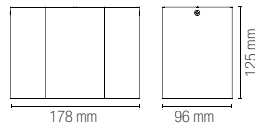

DOMO

Plafoniera in alluminio con diffusore in acrilico.
Aluminum ceiling lamp with acrylic diffuser.

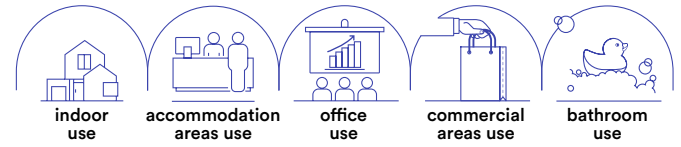

Materiale

alluminio,
diffusore in acrilico

Colore

bianco
nero
cromo



Temperatura colore

4000K



Driver

incluso

Material

aluminum,
acrilic diffuser

Colour

white
black
chrome



Colour temperature

4000K




Driver

included






	colour temp.	colour
LED-DOMO-R24-BCO 8031414882779 lumen	2700 lm	
LED-DOMO-R24-NER 8031414893836 lumen	2700 lm	
LED-DOMO-R24 8031414876228 lumen	2700 lm	
watt		24W
beam angle		120°



	colour temp.	colour
LED-DOMO-Q24-BCO 8031414882762 lumen	2700 lm	
LED-DOMO-Q24-NER 8031414893843 lumen	2700 lm	
LED-DOMO-Q24 8031414876235 lumen	2700 lm	
watt		24W
beam angle		120°



BLASTER

Applique a LED con struttura cromata e diffusore in policarbonato.

LED wall lamp with chromed structure and polycarbonate diffuser.



Materiale
alluminio,
diffusore in PC

Colore
struttura cromata
diffusore bianco



Temperatura colore
4000K



Driver
integrato

Material
aluminum,
PC diffuser

Colour
chrome structure
white diffuser



Colour temperature
4000K



Driver
built-in driver



LED-BLASTER-60

8031414866526

lumen

colour
temp.




1720 lm

watt

15W

beam angle

133°



LED-BLASTER-PLUG

8031414866519

lumen

colour
temp.



1000 lm

watt


8W

beam angle

133°



plug max 2000W



CRUISE

Appliche a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.

LED wall lamp with thermoplastic structure and acrylic diffuser with frame and mirror fixing.



In.tec light APPLIQUE E PLAFONIERE / WALL LAMPS AND CEILING LAMPS

Temperatura colore

4000K



Driver

integrato

Colour temperature

4000K



Driver

built-in driver



SPOT-B-CRUISE-BCO

8031414897636

lumen

colour temp. colour



550 lm

SPOT-B-CRUISE-NER

8031414897674

lumen



550 lm

SPOT-B-CRUISE

8031440363426

lumen




550 lm

watt

5,2W


beam angle

120°



YACHT

Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with thermoplastic frame and acrylic diffuser with frame or mirror mounting.

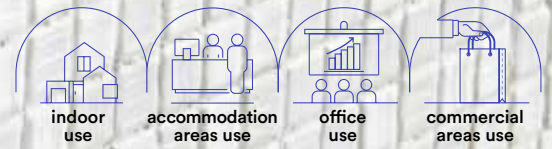

Materiale
termoplastica

Material
thermoplastic

Colore
cromo
diffusore in acrilico

Colour
chrome
acrylic diffuser

Temperatura colore
3000K / 4000K



Driver
integrato


Colour temperature
3000K / 4000K



Driver
built-in driver



	colour temp.	colour
SPOT-B-YACHT-5C 8031414915736	600 lm	
SPOT-B-YACHT-5M 8031414915743	600 lm	
watt	5W	
beam angle	120°	




Fissaggio su cornice /
Frame fixing



Fissaggio su specchio /
Mirror fixing

NOIR

Applique a LED nero con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.
Black LED wall lamp with thermoplastic frame and acrylic diffuser with frame or mirror mounting.

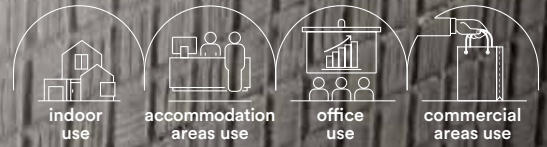

In.tec light - APPLIQUE E PLAFONIERE / WALL LAMPS AND CEILING LAMPS

Materiale
termoplastica

Material
thermoplastic



Colore
nero opaco
diffusore in acrilico

Colour
satin black
acrylic diffuser




Temperatura colore
3000K / 4000K

Colour temperature
3000K / 4000K




Driver
integrato

Driver
built-in driver

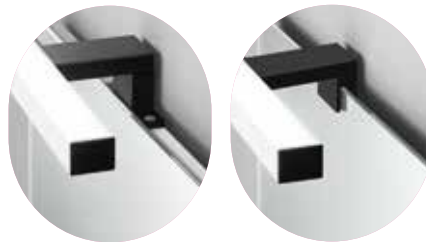

	colour temp.	colour
SPOT-B-NOIR-5C 8031414917570	600 lm	
SPOT-B-NOIR-5M 8031414917587	600 lm	
watt	5W	
beam angle	120°	




LANCER

Applique a LED in alluminio bianco, nero, cromato ed oro spazzolato.
LED wall light in white, black, chrome and brushed gold aluminum.



Materiale
alluminio,
diffusore in PC

Colore
bianco goffrato
nero goffrato
cromo
oro spazzolato



Temperatura colore
3000K / 4000K



Driver
integrato

Material
aluminum,
PC diffuser

Colour
embossed white
embossed black
chrome
brushed gold





Colour temperature
3000K / 4000K




Driver
built-in driver





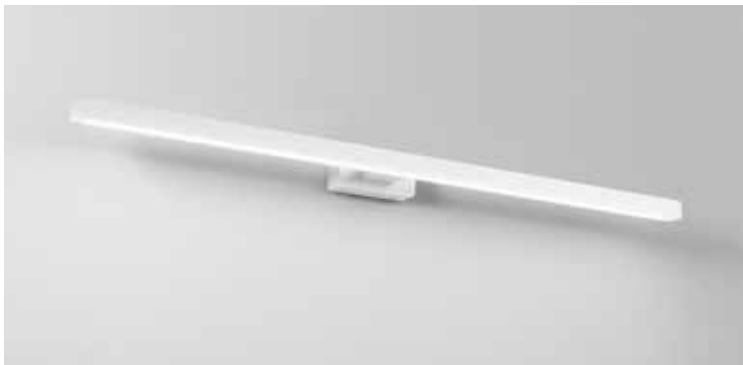


	colour temp.	colour
LED-W-LANCER-C BCO 8031414876679		
lumen	1000 lm	
LED-W-LANCER BCO 8031440361200		
lumen	1000 lm	
watt	13W	
beam angle	120°	




	colour temp.	colour
LED-W-LANCER NERO 8031440361217		
lumen	1000 lm	
watt	13W	
beam angle	120°	

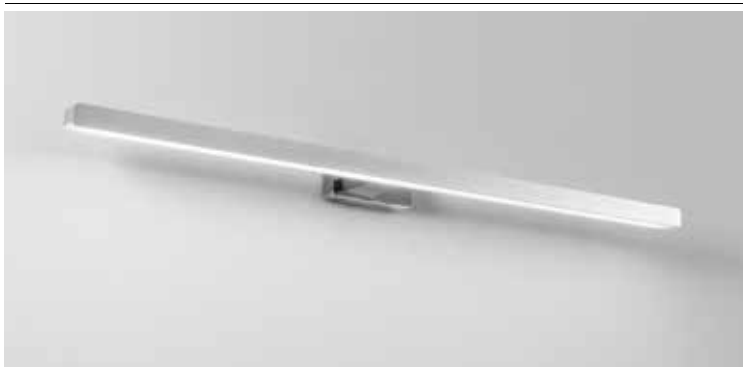

	colour temp.	colour
LED-W-LANCER CR 8031414882564		
lumen	1000 lm	
watt	13W	
beam angle	120°	



	colour temp.	colour
LED-W-LANCER ORO 8031414882571		
lumen	1000 lm	
watt	13W	
beam angle	120°	



SACS

Appliche a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.

LED wall lamp with thermoplastic structure and acrylic diffuser with frame and mirror fixing.



Temperatura colore

4000K



Driver

integrato

Colour temperature

4000K



Driver

built-in driver



SPOT-B-SACS-XL

8031414877010

lumen

colour temp.



colour




540 lm

watt

4W

beam angle

120°



RIVA

Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio.

LED wall lamp with thermoplastic structure and acrylic diffuser with frame and mirror fixing.



Temperatura colore

4000K



Driver

integrato

Colour temperature

4000K



Driver

built-in driver



APPLIQUE E PLAFONIERE / WALL LAMPS AND CEILING LAMPS

In.tec light



SPOT-B-RIVA

8031440363457

lumen

colour temp.



colour




575 lm

watt

8W

beam angle

120°



Fissaggio su cornice /
Frame fixing



Fissaggio su specchio /
Mirror fixing

AQA

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.

LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.



Materiale
alluminio,
diffusore in PC

Colore

struttura cromata
diffusore bianco



Temperatura colore
4000K



Driver
integrato

Material
aluminum,
PC diffuser

Colour

chrome structure
white diffuser




Colour temperature
4000K



Driver
built-in driver



	colour temp.	colour
SPOT-B-AQA 8031414877027		
lumen	819 lm	
watt	8W	
beam angle	120°	



Fissaggio su cornice / Frame fixing



Fissaggio su specchio / Mirror fixing

WALLY

Applique a LED con struttura in alluminio e diffusore in acrilico con fissaggio su cornice o su specchio.
LED wall lamp with aluminum structure and acrylic diffuser with frame and mirror fixing.



Temperatura colore

4000K



Driver
integrato

Colour temperature

4000K



Driver
built-in driver



SPOT-B-WALLY

8031440363471

lumen

colour temp.




colour



910 lm

watt 8W
beam angle 120°




Fissaggio su cornice /
Frame fixing



Fissaggio su specchio /
Mirror fixing

DIVA

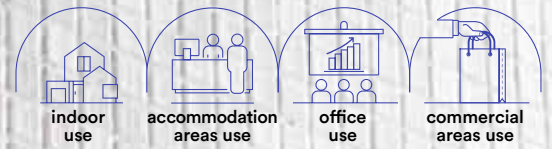

Materiale
termoplastica

Colore
struttura cromata
diffusore bianco



Temperatura colore
3000K / 4000K



Driver
integrato

Material
thermoplastic

Colour
chrome structure
white diffuser



Colour temperature
3000K / 4000K



Driver
built-in driver





Applique a LED con struttura in termoplastica e diffusore in acrilico con fissaggio su cornice o su specchio. Disponibile in forma circolare con diametro di 75 mm o in forma quadrata di 45 mm.

LED wall lamp with thermoplastic frame and acrylic diffuser with frame or mirror mounting. Available in circular form with a diameter of 75 mm or in square form with a diameter of 45 mm.





	colour temp.	colour
SPOT-B-DIVA-R4C 8031414915750		
lumen	460 lm	
SPOT-B-DIVA-R4M 8031414915767		
lumen	460 lm	

	colour temp.	colour
SPOT-B-DIVA-Q4C 8031414915774		
lumen	460 lm	
SPOT-B-DIVA-Q4M 8031414915781		
lumen	460 lm	

watt	4W
beam angle	100°

watt	4W
beam angle	100°



Fissaggio su cornice / Frame fixing



Fissaggio su specchio / Mirror fixing




Fissaggio su cornice / Frame fixing



Fissaggio su specchio / Mirror fixing

F1

Applique metallo flessibile cromo con diffusore in vetro bianco satinato.
Flexible chrome metal wall lamp with satin white glass diffuser.

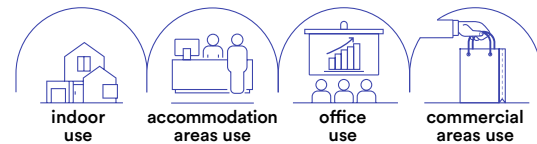

colour

SPOT-F1
8031414076956

1 x G9 MAX 28W

CE

Lampadina non inclusa /
Light bulb not included

ROBY

Applique da specchio in metallo cromato con diffusore in vetro bianco cromato.
Mirror wall lamp in chromed metal with white chromed glass diffuser.

colour

SPOT-B-ROBY-CP
8031440312349

2 x E14 MAX 28W

colour

SPOT-B-ROBY
8031440312356

2 x E14 MAX 28W


CE

Fissaggio su cornice /
Frame fixing

Lampadina non inclusa /
Light bulb not included

Q1

Applique metallo cromo con diffusore in vetro satinato.
Chrome metal wall lamp with satin glass diffuser.



In.tec light APPLIQUE E PLAFONIERE / WALL LAMPS AND CEILING LAMPS


colour

SPOT-Q1

8031414076932




2 x G9 MAX 28W



Lampadina non inclusa /
Light bulb not included

INDOOR

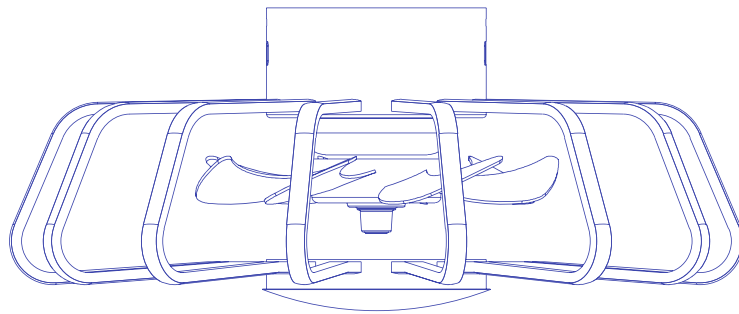


VENTILATORI
FANS

HERON

Plafoniera con ventilatore bladeless dalla forma circolare e con LED integrato.

Bladeless fan ceiling lamp with a circular shape and integrated LED.

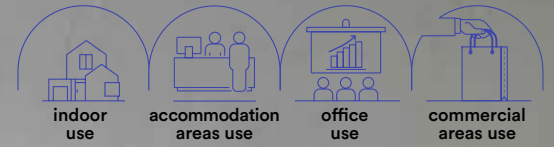

Materiale

alluminio e acrilico

Temperatura colore

CCT



Materiale ventilatore

ventilatore interno ultrasilenzioso con sistema roteante per una maggiore diffusione dell'aria

Driver

incluso

Material

aluminum and acrylic

Colour temperature

CCT



Fan material

ultra silent bladeless fan with rotating system for greater air diffusion

Driver

included






CONTROL SYSTEM included
MEMORY FUNCTION



LED-HERON-BCO
8031414919796

	colour temp.	colour
	CCT	
lumen	5280 lm	
led	48W 220-240V - 50/60Hz	
fan	20W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC20W 6 velocità / speed	
volume aria / air volume	25 m ³ min.	
livello sonoro / sound level	48 dB	

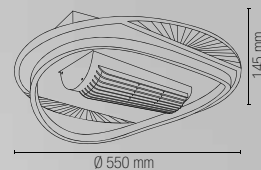

In.tec light VENTILATORI / FANS

Control system easy installation

Regolazione velocità ventole / Fan speed adjustment

Impostazione timer / Timer setting


Regolazione intensità di luce (dimmer) / Light intensity (dimmer)

Regolazione gradi kelvin / Adjustable white

BLYTH

Plafoniera con ventilatore bladeless dalla forma quadrata e con LED integrato.

Bladeless fan ceiling lamp with a square shape and integrated LED.

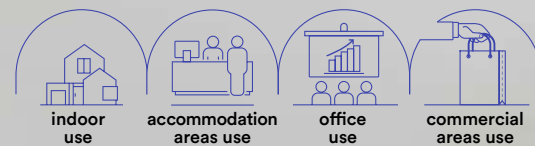

Materiale

alluminio e acrilico

Temperatura colore

CCT



Materiale ventilatore

ventilatore interno ultrasilenzioso con sistema roteante per una maggiore diffusione dell'aria

Driver

incluso

Material

aluminum and acrylic

Colour temperature

CCT



Fan material

ultra silent bladeless fan with rotating system for greater air diffusion

Driver

included






CONTROL SYSTEM included
MEMORY FUNCTION



LED-BLYTH-BCO
8031414919789

	colour temp.	colour
	CCT	
lumen	5280 lm	
led	48W 220-240V - 50/60Hz	
fan	20W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC20W 6 velocità / speed	
volume aria / air volume	25 m ³ min.	
livello sonoro / sound level	48 dB	

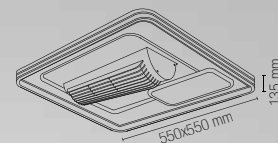

VENTILATORI / FANS

In.tec light

Control system easy installation

Regolazione velocità ventole / Fan speed adjustment


Impostazione timer / Timer setting

Regolazione intensità di luce (dimmer) / Light intensity (dimmer)

Regolazione gradi kelvin / Adjustable white

ALBATROS

Plafoniera con ventilatore.
Ceiling lamp with fan.

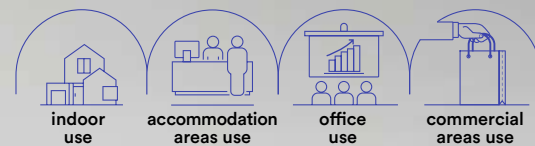

Materiale

alluminio, acrilico

Colore

bianco
nero



Temperatura colore

CCT



Materiale ventilatore

3 lame in termoplastica
retrattili

Caratteristiche ventilatore

3 lame ultra silenziose
con rotazione bilaterale

Driver

incluso

Material

aluminum, acrylic

Colour

white
black



Colour temperature

CCT



Fan material

3 thermoplastic
retractable blades

Fan characteristics

3 ultra-silent
blades

Driver

included





LED-ALBATROS-BCO


8031414919765

colour temp. | colour



CCT

lumen	4668 lm
led	36W 220-240V - 50/60Hz
fan	30W 220-240V - 50/60Hz
beam angle	120°
potenza ventilatore / fan power	DC22W 6 velocità / speed
volume aria / air volume	25 m ³ min.
livello sonoro / sound level	48 dB

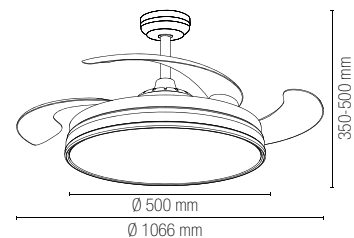

LED-ALBATROS-NER


8031414919635

colour temp. | colour




CCT





lumen	4668 lm
led	36W 220-240V - 50/60Hz
fan	30W 220-240V - 50/60Hz
beam angle	120°
potenza ventilatore / fan power	DC22W 6 velocità / speed
volume aria / air volume	25 m ³ min.
livello sonoro / sound level	48 dB

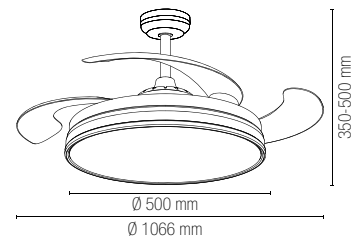

Reverse system - DC motor




Control system easy installation



MAGNUS

Plafoniera con ventilatore.
Ceiling lamp with fan.

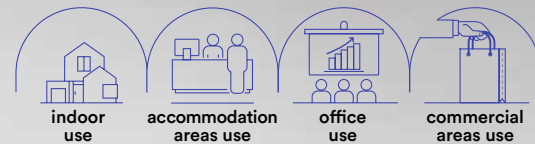

Materiale

alluminio, acrilico

Colore

bianco
nero



Temperatura colore

CCT



Materiale ventilatore

3 lame
in termoplastica

Caratteristiche ventilatore

3 lame ultra silenziose
con rotazione bilaterale

Driver

incluso

Material

aluminum, acrylic

Colour

white
black



Colour temperature

CCT



Fan material

3 thermoplastic
blades

Fan characteristics

3 ultra-silent
blades

Driver

included






LED-MAGNUS-BCO

8031414919727


	colour temp.	colour
	CCT	
lumen	9400 lm	
led	80W 220-240V - 50/60Hz	
fan	32W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC40W 6 velocità / speed	
volume aria / air volume		50 m ³ min.
livello sonoro / sound level		48 dB

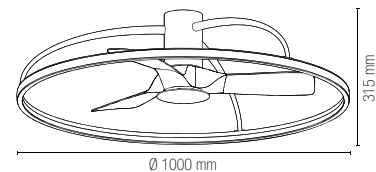

LED-MAGNUS-NER






8031414919734

	colour temp.	colour
	CCT	
lumen	9400 lm	
led	80W 220-240V - 50/60Hz	
fan	32W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC40W 6 velocità / speed	
volume aria / air volume		50 m ³ min.
livello sonoro / sound level		48 dB

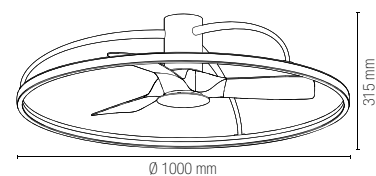


Reverse system - DC motor

Control system easy installation



HADLEY

Plafoniera con ventilatore.
Ceiling lamp with fan.

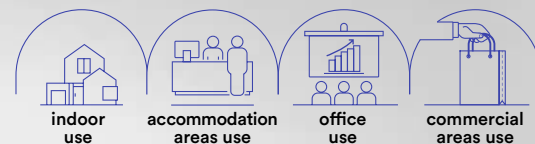

Materiale

alluminio, acrilico

Colore

bianco
nero
antracite



Temperatura colore

CCT



Materiale ventilatore

3 lame
in termoplastica

Caratteristiche ventilatore

3 lame ultra silenziose
con rotazione bilaterale

Driver

incluso

Material

aluminum, acrylic

Colour

white
black
anthracite



Colour temperature

CCT



Fan material

3 thermoplastic
blades

Fan characteristics

3 ultra-silent
blades


Driver

included




LED-HADLEY-BCO
8031414919697

	colour temp.	colour
	CCT	
lumen	5250 lm	
led	40W 220-240V - 50/60Hz	
fan	11W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC30W 6 velocità / speed	
volume aria / air volume	25 m ³ min.	
livello sonoro / sound level	48 dB	




LED-HADLEY-NER
8031414919710

	colour temp.	colour
	CCT	
lumen	5250 lm	
led	40W 220-240V - 50/60Hz	
fan	11W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC30W 6 velocità / speed	
volume aria / air volume	25 m ³ min.	
livello sonoro / sound level	48 dB	




LED-HADLEY-GR
8031414919703





	colour temp.	colour
	CCT	
lumen	5250 lm	
led	40W 220-240V - 50/60Hz	
fan	11W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC30W 6 velocità / speed	
volume aria / air volume	25 m ³ min.	
livello sonoro / sound level	48 dB	



Reverse system - DC motor




Control system easy installation



AUSTER

Plafoniera con ventilatore.
Ceiling lamp with fan.

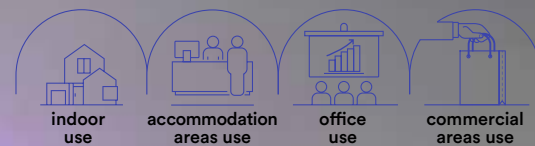

Materiale

alluminio, acrilico

Colore

bianco



Temperatura colore

RAINBOW + CCT



Materiale ventilatore

3 lame
in termoplastica

Caratteristiche ventilatore

3 lame ultra silenziose
con rotazione bilaterale

Driver

incluso

Material

aluminum, acrylic

Colour

white



Colour temperature

RAINBOW + CCT



Fan material

3 thermoplastic
blades


Fan characteristics

3 ultra-silent
blades

Driver

included



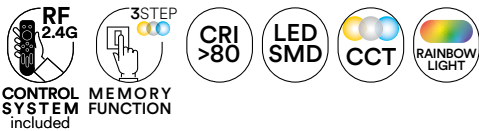


LED-AUSTER-COLOR

8031414919758


colour temp.	colour
RAINBOW CCT	

lumen	7650 lm
led	60W 220-240V - 50/60Hz
fan	28W 220-240V - 50/60Hz
beam angle	120°
potenza ventilatore / fan power	DC40W 6 velocità / speed
volume aria / air volume	50 m ³ min.
livello sonoro / sound level	48 dB

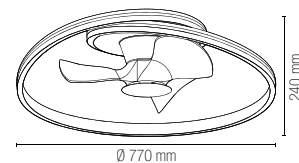


Reverse system - DC motor





SUMMER



WINTER




Control system easy installation



STORM

Plafoniera con ventilatore.
Ceiling lamp with fan.

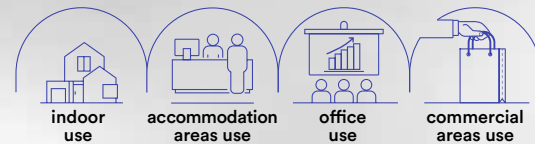

Materiale

alluminio, acrilico

Colore

bianco
nero



Temperatura colore

CCT



Materiale ventilatore

3 lame
in termoplastica

Caratteristiche ventilatore

3 lame ultra silenziose
con rotazione bilaterale

Driver

incluso

Material

aluminum, acrylic

Colour

white
black



Colour temperature

CCT



Fan material

3 thermoplastic
blades

Fan characteristics

3 ultra-silent
blades

Driver

included






LED-STORM-BCO

8031414919741


	colour temp.	colour
	CCT	
lumen	7450 lm	
led	60W 220-240V - 50/60Hz	
fan	28W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC40W 6 velocità / speed	
volume aria / air volume	50 m ³ min.	
livello sonoro / sound level	48 dB	

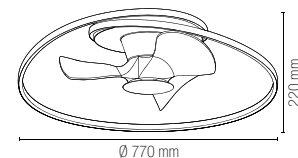

LED-STORM-NER


8031414919758

	colour temp.	colour
	CCT	
lumen	7450 lm	
led	60W 220-240V - 50/60Hz	
fan	28W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC40W 6 velocità / speed	
volume aria / air volume	50 m ³ min.	
livello sonoro / sound level	48 dB	

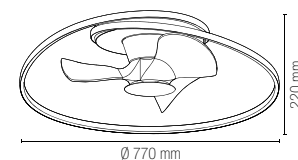


Reverse system - DC motor

Control system easy installation



SUMMER



WINTER



Regolazione velocità ventole / Fan speed adjustment



Impostazione timer / Timer setting



Regolazione intensità di luce (dimmer) / Light intensity (dimmer)



Regolazione gradi kelvin / Adjustable white

Plafoniere con ventilatore in bianco effetto cielo stellato.
Ceiling fan lamps with white starry sky effect.



Materiale

acrilico PMMA
bianco effetto cielo stellato

Temperatura colore

CCT



Materiale ventilatore

7 lame bianche
in termoplastica

Caratteristiche ventilatore

7 lame ultra silenziose
con rotazione unilaterale.
Ghiera esterna roteante per
una maggiore diffusione dell'aria.

Driver

incluso

Material

PMMA acrylic white colour
with starry sky effect

Colour temperature

CCT



Fan material

7 white
thermoplastic blades

Fan characteristics

7 ultra-silent blades
unidirectional rotation
rotating outer ring for
greater air diffusion

Driver

included



technical information




BOREA



LED-BOREA-INT 8031414873692

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power		AC 34W
		900rpm 1050rpm 1200rpm
volume aria / air volume		25 m ³ min.
livello sonoro / sound level		48 dB

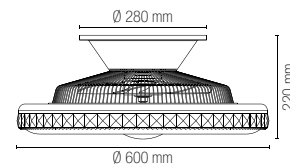


SKYRON



LED-SKYRON-INT 8031414873678

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power		AC 34W
		900rpm 1050rpm 1200rpm
volume aria / air volume		25 m ³ min.
livello sonoro / sound level		48 dB

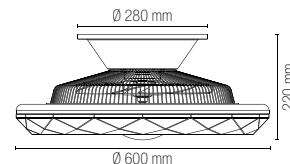

Control system easy installation



On-off ghiera esterna /
On-off outer ring



Regolazione velocità ventole /
Fan speed adjustment



Impostazione timer /
Timer setting



Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)



Regolazione gradi kelvin /
Adjustable white



Smart
Intec
WIFI




RF 2.4G
control
system



ALEXA e
GOOGLE
HOME
voice control



Plafoniere con ventilatore in acrilico PMMA.
Ceiling fan lamps with PMMA acrylic fan.

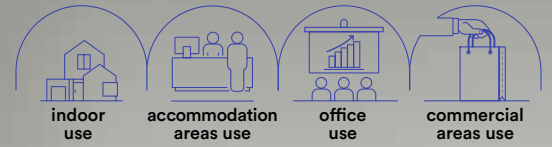

Materiale
acrilico PMMA

Temperatura colore
CCT



Materiale ventilatore
7 lame trasparenti
in termoplastica

Caratteristiche ventilatore
7 lame ultra
silenziose con
rotazione unilaterale

Driver
incluso

Material
PMMA acrylic

Colour temperature
CCT



Fan material
7 trasparent
thermoplastic blades

Fan characteristics
7 ultra-silent
blades unidirectional
rotation

Driver
included



technical information




ALISEO



LED-ALISEO-INT 8031414873661

	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	25 m ³ min.	
livello sonoro / sound level	48 dB	

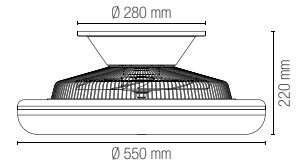


FOEHN



LED-FOEHN-INT 8031414873685






	colour temp.	colour
	CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	34W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	AC 34W 900rpm 1050rpm 1200rpm	
volume aria / air volume	25 m ³ min.	
livello sonoro / sound level	48 dB	

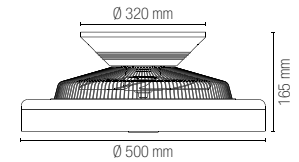

APPLIQUE E PLAFONIERE / WALL LAMPS AND CEILING LAMPS

In.tec light

Control system easy installation



Smart Intec WIFI



RF 2.4G control system




ALEXA e GOOGLE HOME voice control



GRECALE

Plafoniera con ventilatore.
Ceiling lamp with fan.

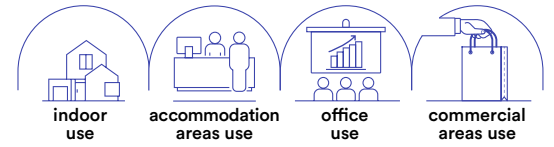

Materiale

alluminio, acrilico

Colore

bianco
nero



Temperatura colore

CCT



Materiale ventilatore

7 lame
in termoplastica

Caratteristiche ventilatore

7 lame ultra silenziose
con rotazione bilaterale

Driver

incluso

Material

aluminum, acrylic

Colour

white
black



Colour temperature

CCT



Fan material

7 thermoplastic
blades

Fan characteristics

7 ultra-silent
blades

Driver

included





CONTROL SYSTEM FUNCTION included

technical information **GRECALE**


WI-FI
SMART INTEC



LED-GRECALE-W-INT

8031414885947


	colour temp.	colour
	CCT	
lumen	8470 lm	
led	80W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume		25 m ³ min.
livello sonoro / sound level		48 dB

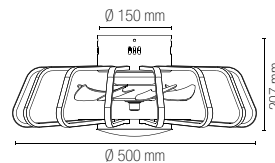

LED-GRECALE-B-INT

8031414885954


	colour temp.	colour
	CCT	
lumen	8470 lm	
led	80W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume		25 m ³ min.
livello sonoro / sound level		48 dB

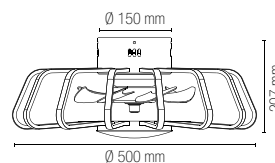

Reverse system - DC motor



SUMMER



WINTER

Control system easy installation



Regolazione velocità ventole / Fan speed adjustment



Impostazione timer / Timer setting



Regolazione intensità di luce (dimmer) / Light intensity (dimmer)



Regolazione gradi kelvin / Adjustable white



Smart Intec WIFI



RF 2.4G control system



ALEXA e GOOGLE HOME voice control



VENTILATORI / FANS

In.tec light

Plafoniere con ventilatore in bianco effetto cielo stellato.
Ceiling fan lamps with white starry sky effect.



Materiale

acrilico PMMA
bianco effetto cielo stellato

Temperatura colore

CCT



Materiale ventilatore

7 lame bianche
in termoplastica

Caratteristiche ventilatore

7 lame ultra silenziose
con rotazione bilaterale,
ghiera esterna roteante per
una maggiore diffusione dell'aria

Driver

incluso

Material

PMMA acrylic white colour
with starry sky effect

Colour temperature

CCT



Fan material

7 white
thermoplastic blades

Fan characteristics

7 ultra-silent blades
bidirectional rotation
rotating outer ring for
greater air diffusion

Driver

included



CONTROL MEMORY SYSTEM FUNCTION included

technical information

WI-FI SMART INTEC




LEVANTE



LED-LEVANTE-INT

8031414885930

	colour temp.	colour
	CCT 4450 lm	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m ³ min.	
livello sonoro / sound level	48 dB	

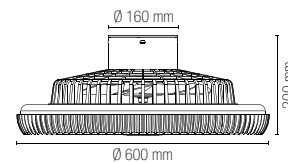


SCIROCCO




LED-SCIROCCO-INT

8031414885923






	colour temp.	colour
	CCT 4450 lm	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle	120°	
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume	25 m ³ min.	
livello sonoro / sound level	48 dB	

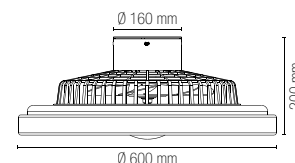

Reverse system - DC motor

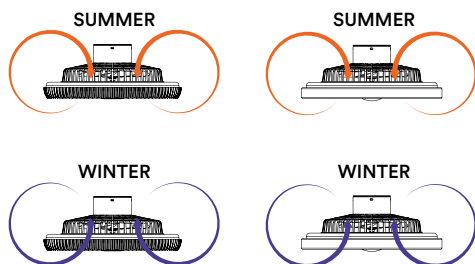

Control system easy installation



Smart Intec WIFI



RF 2.4G control system




ALEXA e GOOGLE HOME voice control



VENTILATORI / FANS

In.tec light

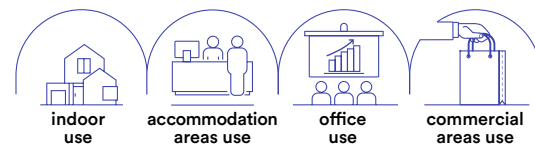

Materiale
alluminio, acrilico

Colore
bianco
nero



Temperatura colore
CCT



Materiale ventilatore
7 lame
in termoplastica

Caratteristiche ventilatore

7 lame ultra silenziose
con rotazione bilaterale

Driver
incluso

Material
aluminum, acrylic

Colour
white
black



Colour temperature
CCT



Fan material
7 thermoplastic
blades


Fan characteristics

7 ultra-silent
blades

Driver
included



Plafoniera con ventilatore.
Ceiling lamp with fan.

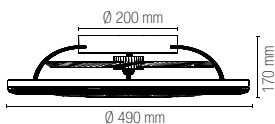

Reverse system - DC motor



	colour temp.	colour
LED-ETESIA-W-FAN 8031414899005		
LED-ETESIA-B-FAN 8031414899012		
	CCT	
lumen	4800 lm	
led	30W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume		25 m ³ min.
livello sonoro / sound level		48 dB


Control system easy installation

Regolazione velocità ventole / Fan speed adjustment

Impostazione timer / Timer setting

Regolazione intensità di luce (dimmer) / Light intensity (dimmer)

Regolazione gradi kelvin / Adjustable white

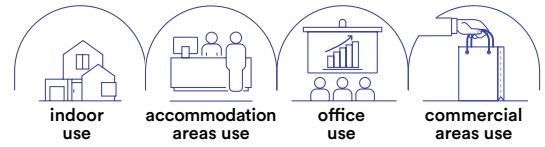

Materiale

alluminio, acrilico

Temperatura colore

CCT



Materiale ventilatore

7 lame trasparenti
in termoplastica

Caratteristiche ventilatore

7 lame ultra
silenziose
rotazione bilaterale

Driver

incluso

Material

aluminum, acrylic

Colour temperature

3000K / 4000K / 6500K



Fan material

7 trasparent
thermoplastic blades

Fan characteristics


7 ultra-silent
blades
bidirectional rotation

Driver


included



Plafoniera con ventilatore. Ceiling lamp with fan.

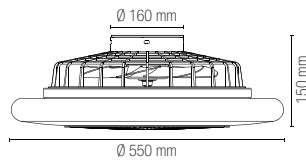

Reverse system - DC motor



	colour temp.	colour
LED-PONENTE-FAN 8031414886586	 CCT	
lumen	4450 lm	
led	40W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC 22W 6 velocità / speed	
volume aria / air volume		25 m ³ min.
livello sonoro / sound level		48 dB

Control system easy installation


Regolazione velocità ventole /
Fan speed adjustment

Impostazione timer /
Timer setting

Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)

Regolazione gradi kelvin /
Adjustable white

Plafoniera con ventilatore.
Ceiling lamp with fan.

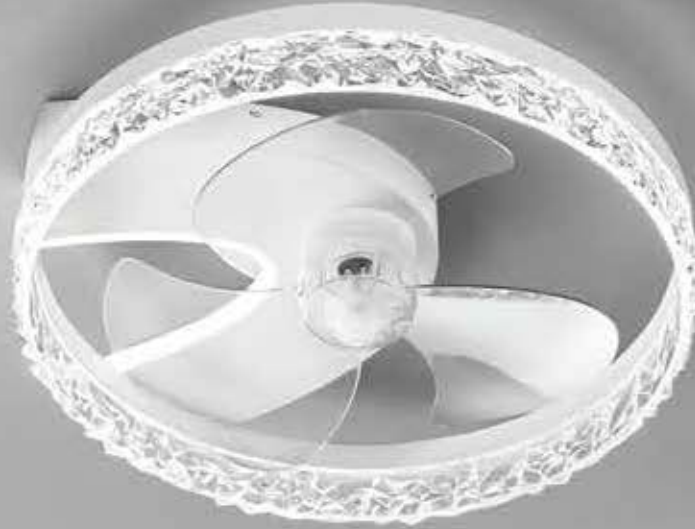

Materiale

alluminio, acrilico

Temperatura colore

CCT



Materiale ventilatore

3 lame trasparenti
in termoplastica

Caratteristiche ventilatore

3 lame ultra
silenziose
rotazione bilaterale

Driver

incluso

Material

aluminum, acrylic

Colour temperature

3000K / 4000K / 6500K



Fan material

3 trasparent
thermoplastic blades

Fan characteristics

3 ultra-silent
blades
bidirectional rotation

Driver

included



technical information




ESPERO



LED-ESPERO-FAN

8031414898992

	colour temp.	colour
	CCT	
lumen	4800 lm	
led	30W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume		20 m ³ min.
livello sonoro / sound level		48 dB

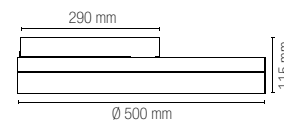


NASHI




LED-NASHI-FAN

8031414899029

	colour temp.	colour
	CCT	
lumen	4800 lm	
led	30W 220-240V - 50/60Hz	
fan	22W 220-240V - 50/60Hz	
beam angle		120°
potenza ventilatore / fan power	DC22W 6 velocità / speed	
volume aria / air volume		20 m ³ min.
livello sonoro / sound level		48 dB

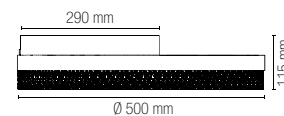

Reverse system - DC motor

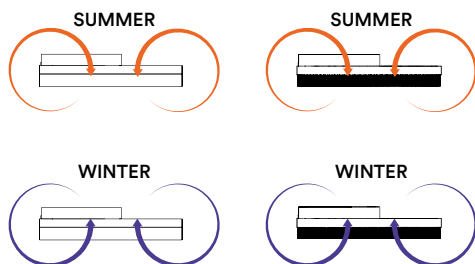

Control system easy installation



Regolazione velocità ventole /
Fan speed adjustment



Impostazione timer /
Timer setting




Regolazione intensità di luce (dimmer) /
Light intensity (dimmer)




Regolazione gradi kelvin /
Adjustable white

INDOOR

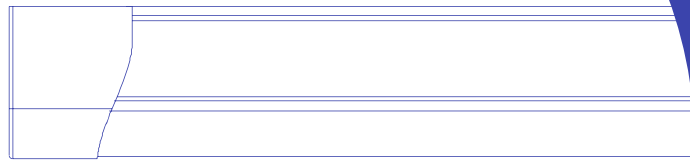

SOTTOPENSILI E BARRE LED
CABINETS AND LEDBARS

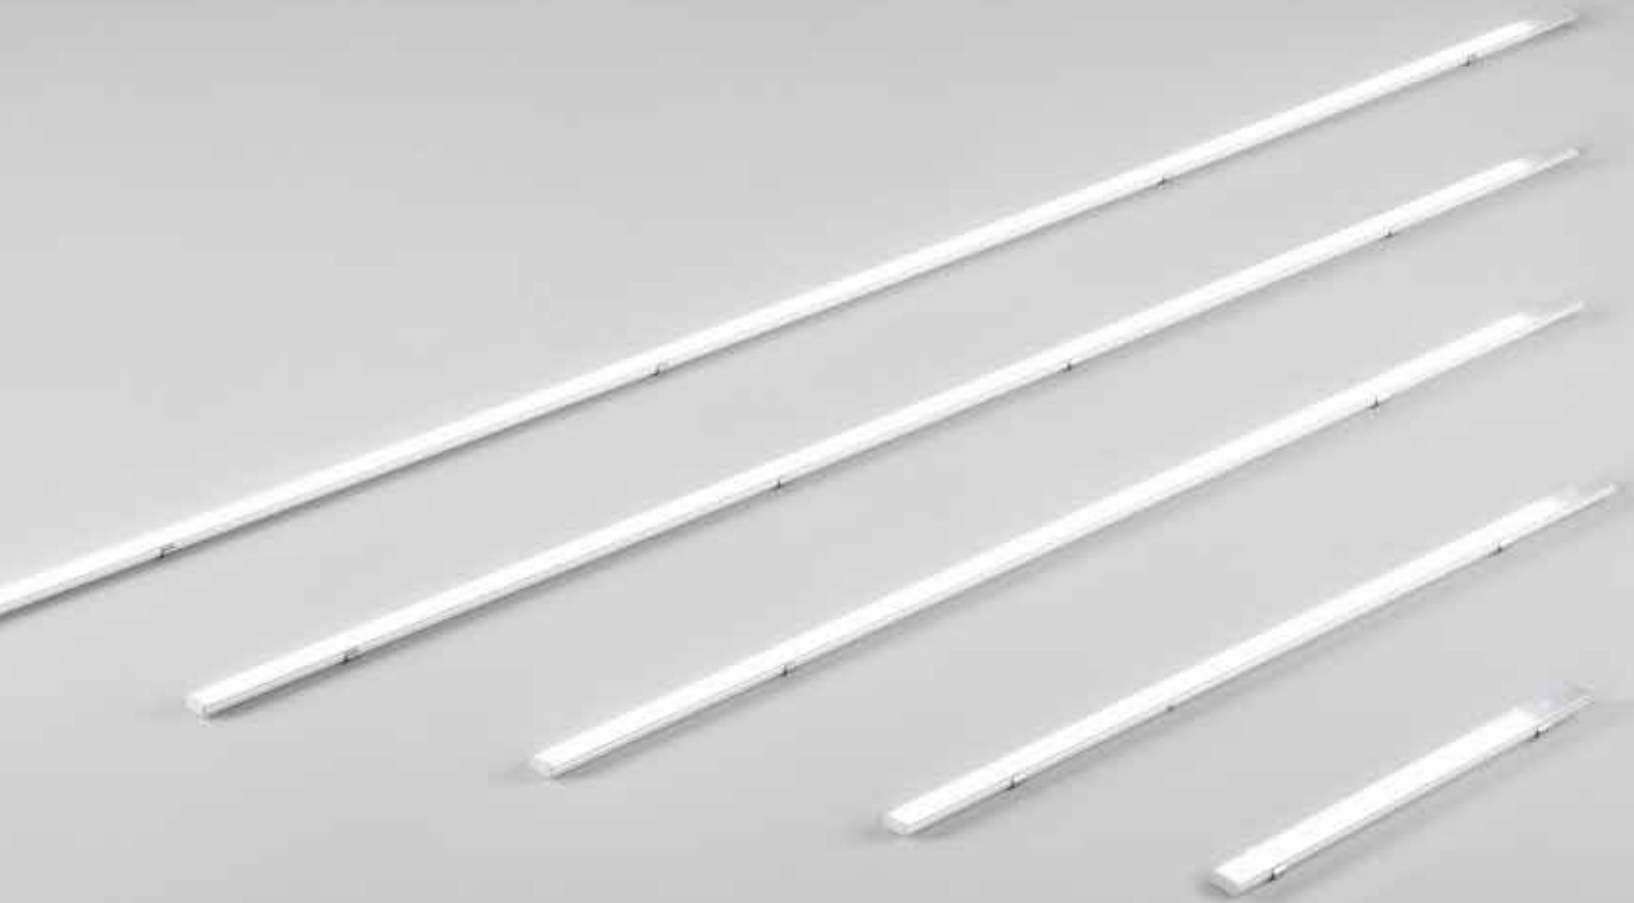

Materiale
struttura in alluminio,
diffusore in PC
riflettente

Colore
nikel



Temperatura colore
4000K



Driver
incluso

Material
aluminum body
with PC
reflective diffuser

Colour
nikel



Colour temperature
4000K



Driver
included



**Barra sottopensile
in alluminio con
diffusore in PC riflettente.**
Cabinet bar with aluminum
structure under wall unit
with reflective PC diffuser.





Accessori inclusi / Included accessories




Staffe / Brackets


colour
temp. | colour

LEDBAR-UNIX-30



8031414866403	 
lumen	658 lm
watt	12W
beam angle	120°





Accessori inclusi /
Included accessories







LEDBAR-UNIX-45

8031414864614	 
lumen	978 lm
watt	12W
beam angle	120°







LEDBAR-UNIX-60

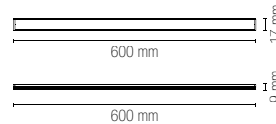8031414864621	 
lumen	1315 lm
watt	12W
beam angle	120°






LEDBAR-UNIX-90

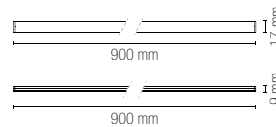8031414864492	 
lumen	1974 lm
watt	20W
beam angle	120°






LEDBAR-UNIX-120

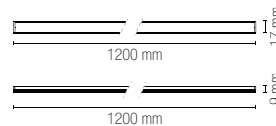8031414864508	 
lumen	2632 lm
watt	30W
beam angle	120°






LEDBAR-UNIX-150

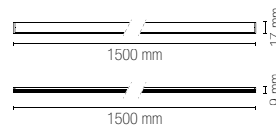8031414865185	 
lumen	3290 lm
watt	30W
beam angle	120°






LEDBAR-UNIX-180

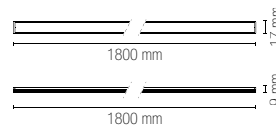8031414865154	 
lumen	3940 lm
watt	60W
beam angle	120°





LEDBAR-UNIX-210

8031414865161	 
lumen	4600 lm
watt	60W
beam angle	120°

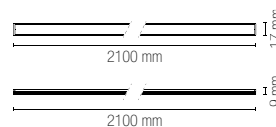




LEDBAR-UNIX-270

8031414865178	 
lumen	5922 lm
watt	60W
beam angle	120°



LEDBAR-UNIX-300

8031414870738	 
lumen	6580 lm
watt	60W
beam angle	120°

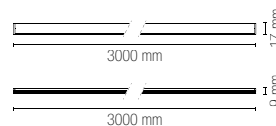



**Barra sottopensile
angolare in alluminio con
diffusore in PC riflettente.**
Angular cabinet bar with
aluminum structure under wall
unit with reflective PC diffuser.



Accessori inclusi / Included accessories



Staffe / Brackets

	colour	colour			Accessori inclusi / Included accessories
	temp.				
LEDBAR-UNIX-45 ANG 8031414864607			978 lm	12W	
lumen					
watt					
beam angle			120°		
				450 mm	
				22 mm	
				16 mm	
				16 mm	
				16 mm	
LEDBAR-UNIX-60 ANG 8031414864478			1315 lm	12W	
lumen					
watt					
beam angle			120°		
				600 mm	
				22 mm	
				16 mm	
				16 mm	
				16 mm	
LEDBAR-UNIX-90 ANG 8031414864485			1974 lm	17,28W	
lumen					
watt					
beam angle			120°		
				900 mm	
				22 mm	
				16 mm	
				16 mm	
				16 mm	
LEDBAR-UNIX-120 ANG 8031414864577			2632 lm	30W	
lumen					
watt					
beam angle			120°		
				1200 mm	
				22 mm	
				16 mm	
				16 mm	
				16 mm	
LEDBAR-UNIX-150 ANG 8031414866373			3290 lm	30W	
lumen					
watt					
beam angle			120°		
				1500 mm	
				22 mm	
				16 mm	
				16 mm	
				16 mm	
LEDBAR-UNIX-180 ANG 8031414866380			3940 lm	60W	
lumen					
watt					
beam angle			120°		
				1800 mm	
				22 mm	
				16 mm	
				16 mm	
				16 mm	
LEDBAR-UNIX-210 ANG 8031414866359			4600 lm	60W	
lumen					
watt					
beam angle			120°		
				2100 mm	
				22 mm	
				16 mm	
				16 mm	
				16 mm	
LEDBAR-UNIX-240 ANG 8031414866366			5264 lm	60W	
lumen					
watt					
beam angle			120°		
				2400 mm	
				22 mm	
				16 mm	
				16 mm	
				16 mm	
LEDBAR-UNIX-300 ANG 8031414866342			6580 lm	60W	
lumen					
watt					
beam angle			120°		
				3000 mm	
				22 mm	
				16 mm	
				16 mm	
				16 mm	

T8

Barra sottopensile con struttura in alluminio a LED integrato con diffusore in PC.

Cabinet bar with integrated LED aluminum structure for under cabinet with PC diffuser.



Materiale

struttura in alluminio,
diffusore in PC

Colore

bianco



Temperatura colore

4000K



Driver

integrato

Material

aluminum body
with PC diffuser

Colour

white



Colour temperature

4000K



Driver

built-in





colour temp. | colour

LEDBAR-T8-60

8031414875382

lumen


850 lm

watt

9W

beam angle

120°

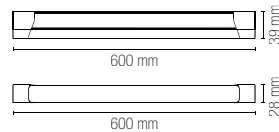

LEDBAR-T8-120

8031414875399

lumen


1700 lm

watt

18W

beam angle

120°

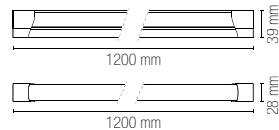

LEDBAR-T8-150

8031414875405

lumen


2300 lm

watt

24W

beam angle

120°

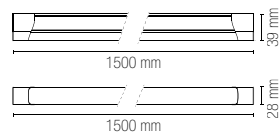

**Accessori inclusi /
Included accessories**



BATTEN

Barra ultra sottile a LED integrato.
Ultra slim cabinet built-in LED bar.



Materiale

struttura in PC bianco,
diffusore in PC bianco

Colore

bianco



Temperatura colore

4000K



Driver

integrato

Material

PC white body with
PC white diffuser

Colour

white



Colour temperature

4000K



Driver

built-in





	colour temp.	colour	
LED-BATTEN-30 8031440357722			
lumen	1077 lm		
watt	9W		
beam angle	120°		
			300 mm
			23 mm
			75 mm
			300 mm
LED-BATTEN-60 8031440357739			
lumen	2166 lm		
watt	18W		
beam angle	120°		
			600 mm
			23 mm
			75 mm
			600 mm
LED-BATTEN-120 8031440357746			
lumen	4252 lm		
watt	36W		
beam angle	120°		
			1200 mm
			23 mm
			75 mm
			1200 mm
LED-BATTEN-150 8031440357753			
lumen	5677 lm		
watt	48W		
beam angle	120°		
			1500 mm
			23 mm
			75 mm
			1500 mm

**Accessori inclusi /
Included accessories**



Staffe /
Brackets

HABILIS

**Barra sottopensile angolare in alluminio
a LED integrato con diffusore in PC.**

Angular cabinet bar with integrated
LED aluminum structure with PC diffuser.



Materiale

struttura in alluminio
diffusore in PC

Colore

bianco



Temperatura colore

4000K



Interruttore

incluso

Driver

integrato

Material

aluminum body
with PC diffuser

Colour

white



Colour temperature

4000K



Switch

included

Driver

built-in




colour temp. | colour

LED-HABILIS-AP

8031414881604

lumen



1750 lm

watt 15W


beam angle 105°




2 plug max 16A



2 USB 2.4A

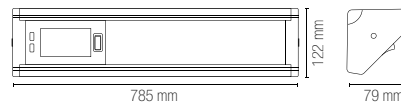



T5

Barra sottopensile con struttura e diffusore in PC.

Cabinet bar with PC structure and diffuser.

Materiale

struttura in PC
diffusore in PC

Colore

bianco



Temperatura colore

4000K



Interruttore

incluso

Driver

integrato

Material

PC white body with
PC white diffuser

Colour

white



Colour temperature

4000K



Swieth

included

Driver

built-in





	colour temp.	colour		
LEDBAR-T5-30 8031440354691				
lumen	436 lm			
watt		5W		
beam angle		135°		
LEDBAR-T5-60 8031440354707				
lumen	784 lm			
watt		8W		
beam angle		135°		
LEDBAR-T5-90 8031440354677				
lumen	1249 lm			
watt		12W		
beam angle		135°		
LEDBAR-T5-120 8031440354684				
lumen	1565 lm			
watt		15W		
beam angle		135°		
LEDBAR-T5-150 8031414871742				
lumen	1926 lm			
watt		18W		
beam angle		135°		



MOVIE

Barra sottopensile orientabile con struttura e diffusore in PC.

Adjustable cabinet bar with PC
structure and diffuser.



Materiale

struttura in PC
diffusore in PC

Colore

bianco

Temperatura colore
4000K



**Temperatura colore
selezionabile**
2700K / 4000K / 6500K



Interruttore

incluso

Driver

integrato

Material

PC body with
PC diffuser

Colour

white

Colour temperature
4000K



**Selectable color
temperature**
2700K / 4000K / 6500K





Swieth

included

Driver

built-in



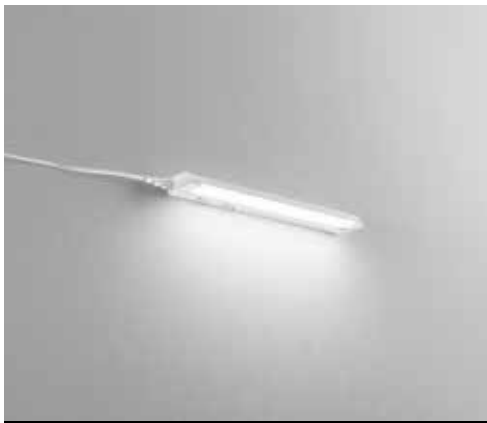


LEDBAR-MOVIE-S

8031414866427

lumen

	colour temp.	colour
500 lm		

watt	6W
beam angle	120°




LEDBAR-MOVIE

8031440355100

lumen

	colour temp.	colour
800 lm		

watt	8W
beam angle	120°

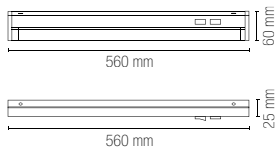


LEDBAR-MOVIE-L

8031414866441


lumen

	colour temp.	colour
1200 lm		

watt	11W
beam angle	120°

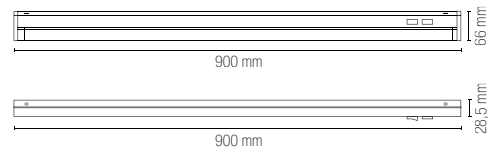


**Accessori inclusi /
Included accessories**

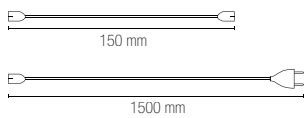

Connettore /
Connector

AC220V~ 240V 50Hz
MULTI-CONNECT

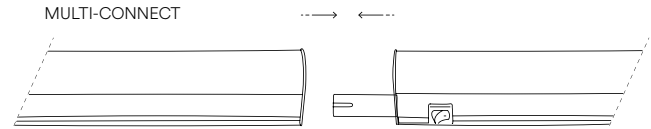

ZAK

Lampada LED con sensore IR.
IR sensor LED lamp.



Materiale

struttura in alluminio,
diffusore in PC
riflettente

Colore

silver



Temperatura colore
3000K



Driver

non incluso DC12V

Material

aluminum body
with PC reflective
diffuser

Colour

silver




Colour temperature
3000K



Driver

not included DC12V




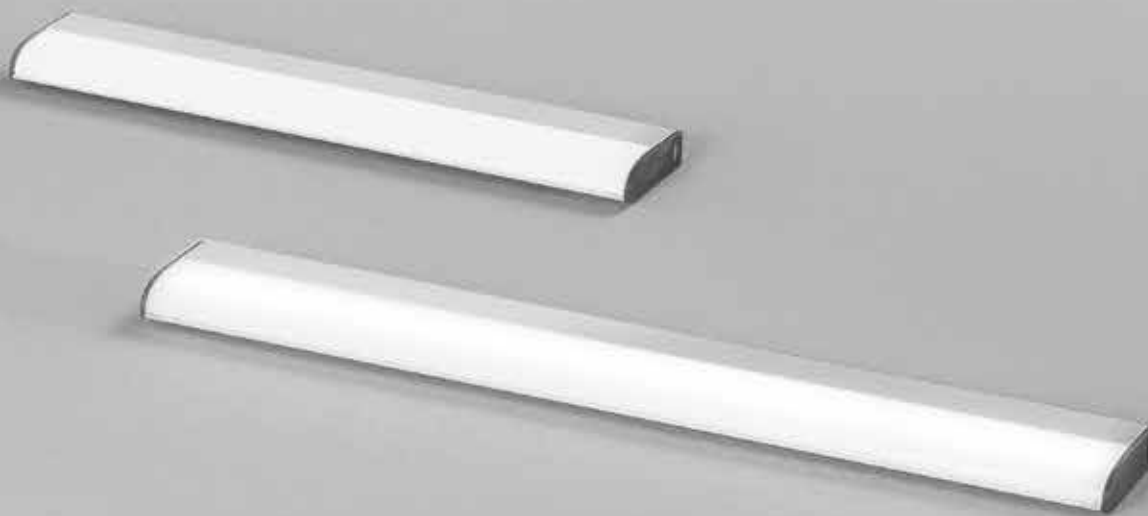

	colour temp.	colour	
LEDBAT-ZAK-IR26 8031414882281			
lumen	100 lm		
watt	1,20W		
beam angle	110°		
LEDBAT-ZAK-IR35 8031414882298			
lumen	150 lm		
watt	1,70W		
beam angle	110°		

Accessori inclusi / Included accessories

IR
Sensore 2 funzioni /
2 function sensor




3.7V 1600mAh
Batteria ricaricabile inclusa /
Included rechargeable battery



DC5V 0,4A Micro USB
Cavo / Cable

GTO



Materiale
polycarbonato

Colore
bianco



Temperatura colore
3000K



Material
polycarbonate

Colour
white



Colour temperature
3000K



Lampada con sensore di movimento ricaricabile.
Rechargeable lamp with motion sensor.



LEDBAT-GTO
8031414882274

lumen


colour temp. | colour



105 lm

watt


1W



Accessori inclusi /
Included accessories

Sensore di movimento /
Motion sensor

2m in side
4m in front
120°




DC 3.7V 1A

Batteria ricaricabile /
Rechargeable battery



DC5V 0,4A Micro USB
Cavo / Cable



AURIKA

Materiale
polycarbonato

Colore
bianco



Temperatura colore
3000K



Material
polycarbonate

Colour
white



Colour temperature
3000K



Lampada LED con sensore IR.
IR sensor LED lamp.



LEDBAT-AURIKA
8031414882250

lumen


colour temp. | colour



100 lm


watt

1,25W



Accessori inclusi /
Included accessories

IR
Sensore / sensor




DC 3.7V 2.2A

Batteria ricaricabile /
Rechargeable battery



DC5V 0,4A Micro USB
Cavo / Cable



Materiale
alluminio

Colore

struttura silver
diffusore bianco

Temperatura colore
3000K



Material
aluminum

Colour









silver structure
white diffuser


Colour temperature
3000K




Lampada LED con sensore IR.
IR sensor LED lamp.



	colour temp.	colour	Accessori inclusi / Included accessories		
LEDBAT-BLAM-IR38 8031414882267			IR Sensore / Sensor		
lumen	150 lm		DC 3.7V 2.2A Batteria ricaricabile / Rechargeable battery		2 hours
watt	1,7W		DC5V 0,4A Micro USB Cavo / Cable		



CLOSET



Materiale
polycarbonato

Colore
silver



Temperatura colore
4000K



Material
polycarbonate

Colour
silver



Colour temperature
4000K



Lampada con sensore di movimento.
Lamp with motion sensor.



LED-CLOSET-10
8031414873012

lumen


colour temp. | colour



105 lm


watt

1W



Accessori inclusi /
Included accessories

Sensore di movimento /
Motion sensor



DC 5V 1A

Batteria ricaricabile /
Rechargeable battery



Micro USB charging wires DC 5V
Cavo non incluso / Not included cable



TRIGGER

Materiale
polycarbonato

Colore
silver



Temperatura colore
4000K



Material
polycarbonate

Colour
silver



Colour temperature
4000K



Kit 2pz. copri cerniera.
Kit 2pz. hinge cover.



LED-TRIGGER
8031414873005

watt

colour temp. | colour




0,2W DC12V




Accessorio non incluso /
Not included accessory

2x23A
Batteria / Battery



Compatibile per cerniera a scatto collo "0" /
Compatible with "0" neck snap hinge

SHELF



Materiale
policarbonato

Colore
struttura silver
diffusore bianco

Temperatura colore
4000K



Material
polycarbonate

Colour
silver structure
white diffuser

Colour temperature
4000K




Lampada con sensore di movimento.
Lamp with motion sensor.



LED-SHELF-R7
8031414873029

lumen

watt



colour temp. colour



110 lm


1W

Accessori inclusi /
Included accessories

Sensore di movimento /
Motion sensor

DC 5V 1A
Batteria ricaricabile /
Rechargeable battery


Micro USB charging wires DC 5V
Cavo non incluso / Not included cable




SOTTOPENSILI E BARRE LED / CABINETS AND LEDBARS


In.tec light





PROFILI E STRIP LED
PROFILES AND STRIP LED



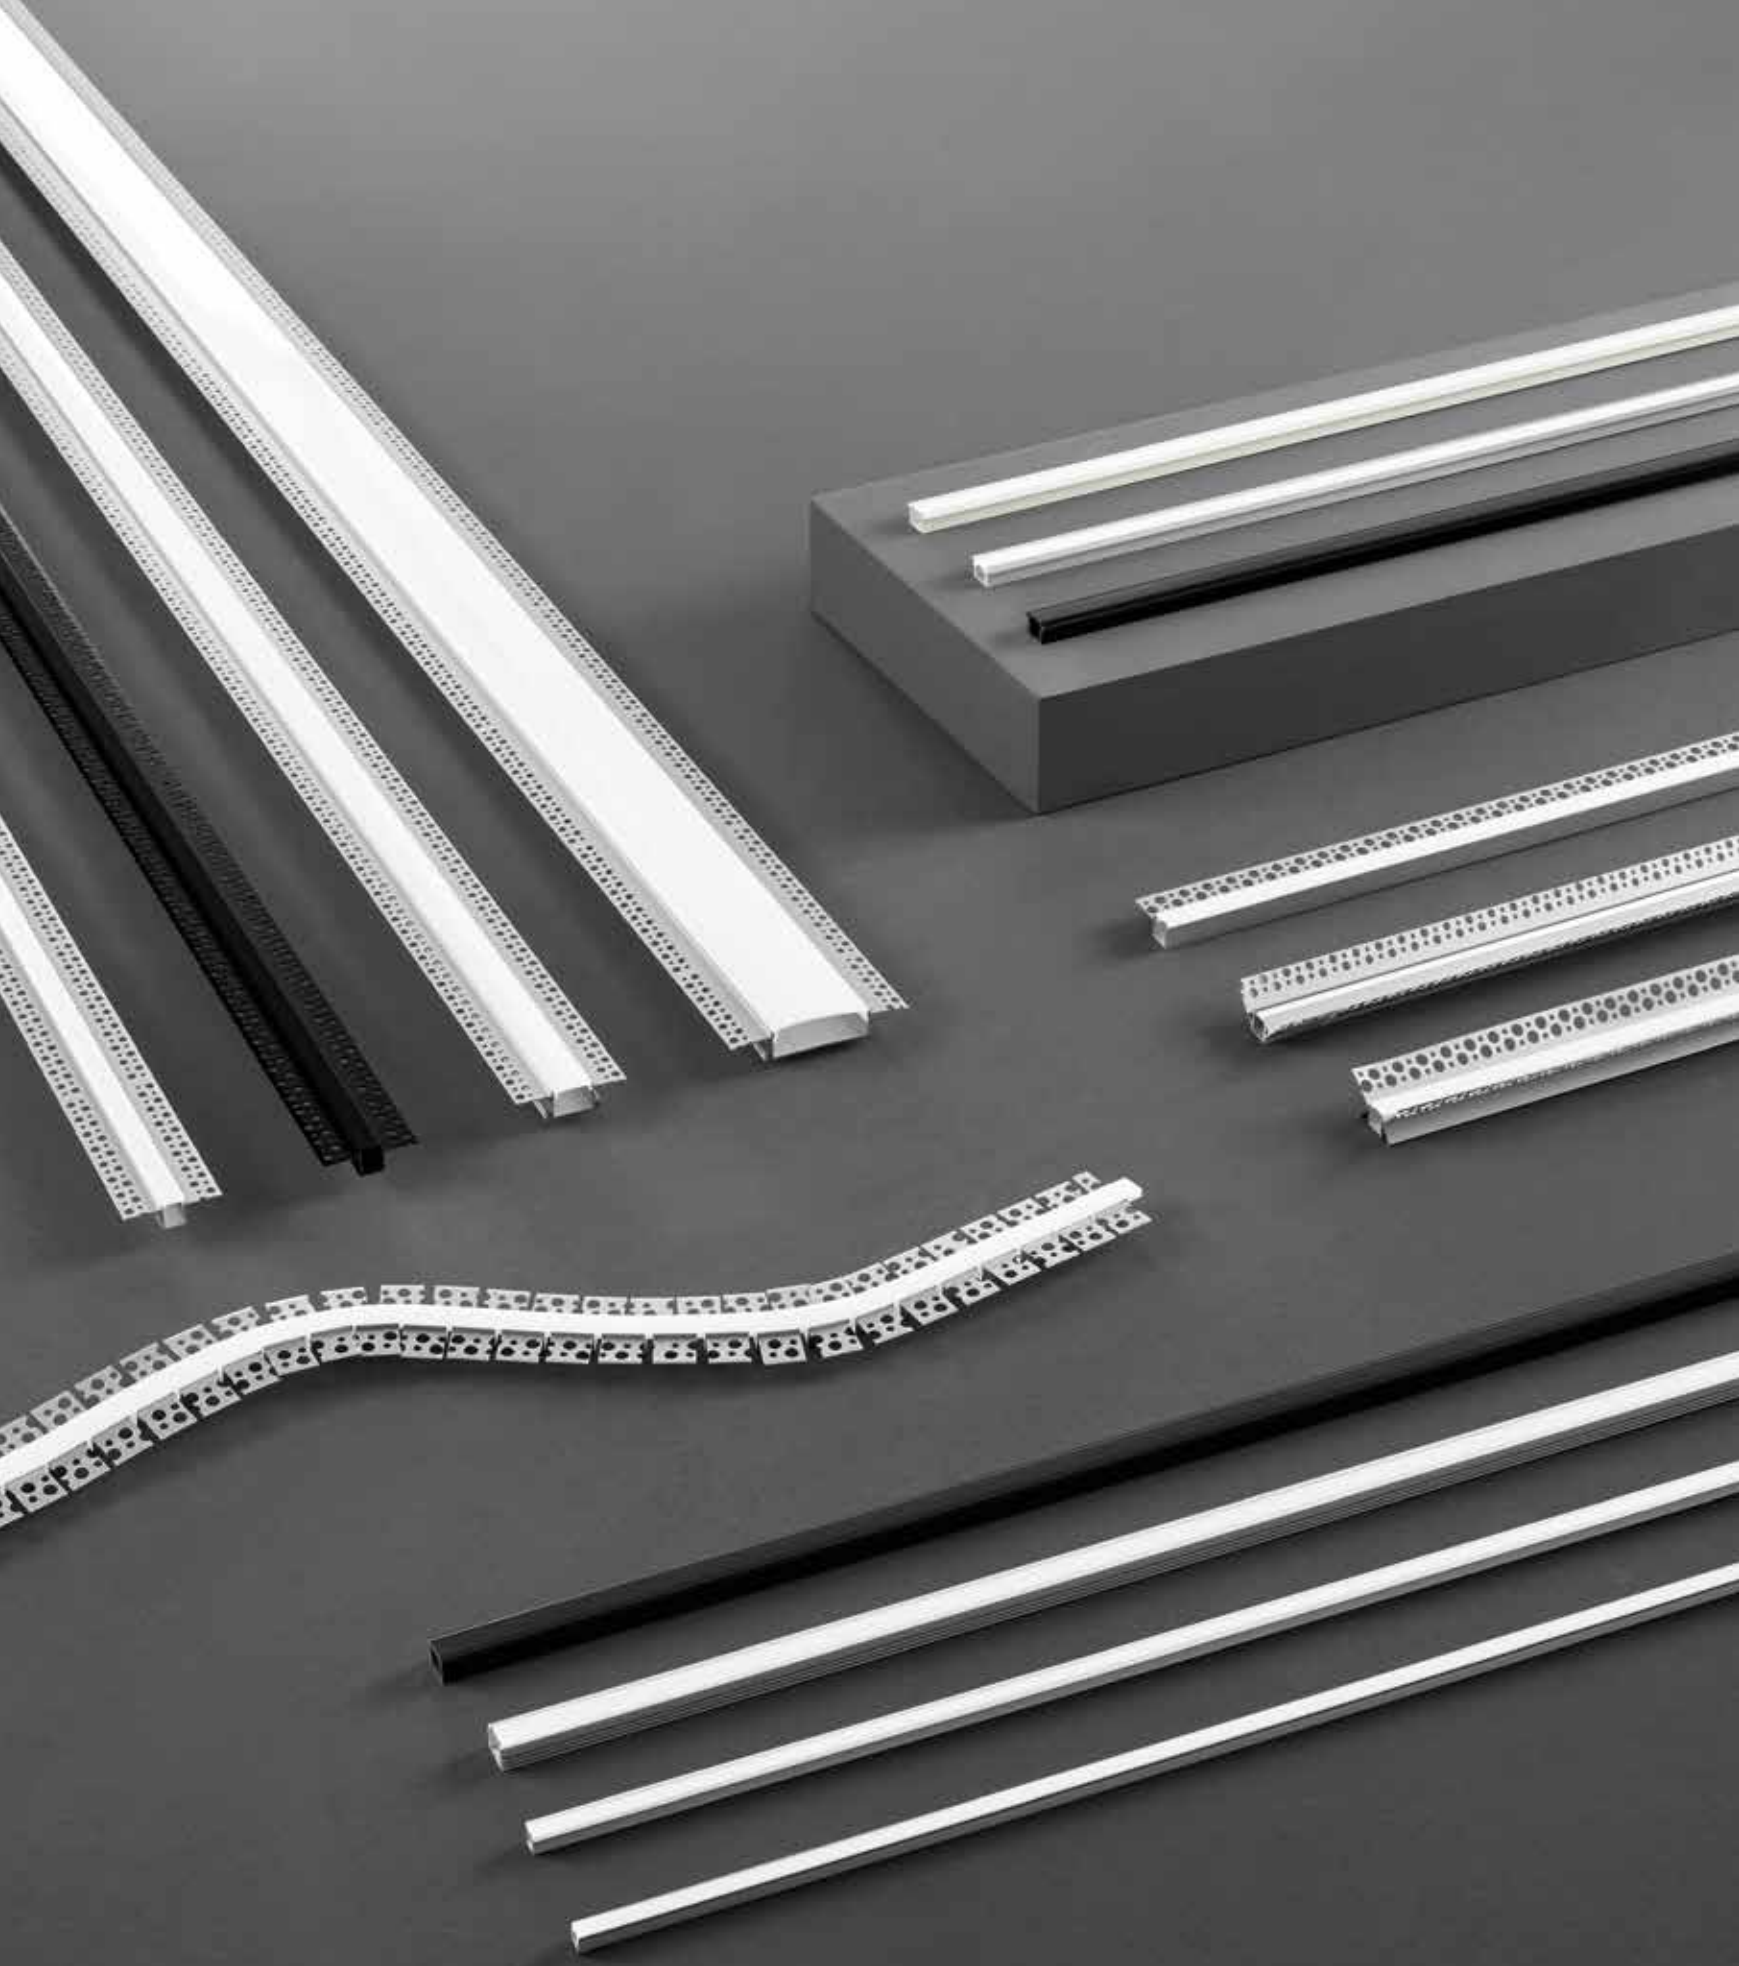

Profiles for recessed and surface installation

I profili per installazione a incasso o a parete sono realizzati con materiali di alta qualità e si distinguono per la loro facilità d'installazione. Garantiscono una distribuzione uniforme della luce e consentono configurazioni personalizzate. Proteggono le strisce LED durante il montaggio e si integrano perfettamente nell'ambiente circostante.

Profiles for recessed or wall installation are made of high-quality materials and are distinguished by their ease of installation. They ensure even light distribution and allow custom configurations. They protect LED strips during installation and blend seamlessly into their surroundings.





Installazione ad incasso /
Recessed installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435



GORIZIA PROFILE

Profilo a rapido fissaggio
nel cartongesso. Diffusore
opale e tappi inclusi /
Quick fixing profile in
plasteboard with opal
diffuser and caps included.

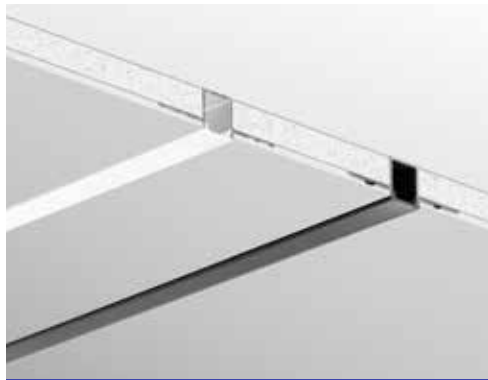
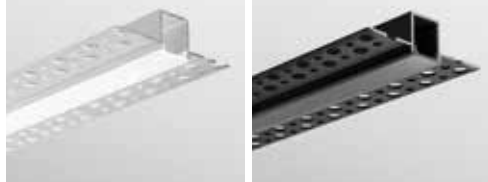


	length	colour
I-PROFILO-GORIZIA-S		
8031414876587	2 m	aluminum





	length	colour
I-PROFILO-GORIZIA-S NER		
8031414876624	2 m	black

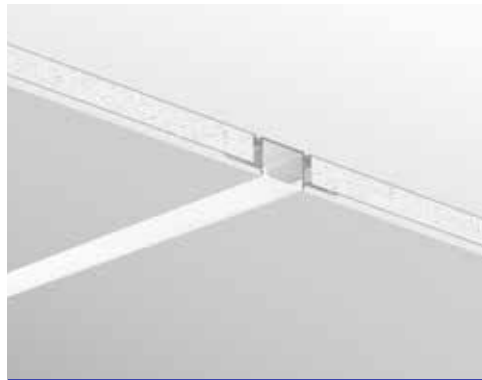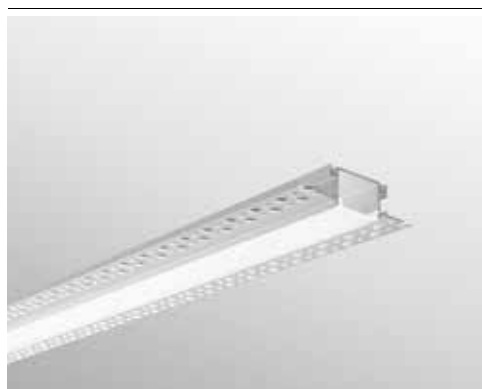

	length	colour
I-PROFILO-GORIZIA		
8031414871124	2 m	aluminum

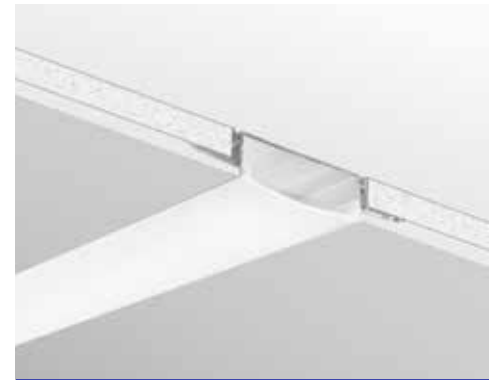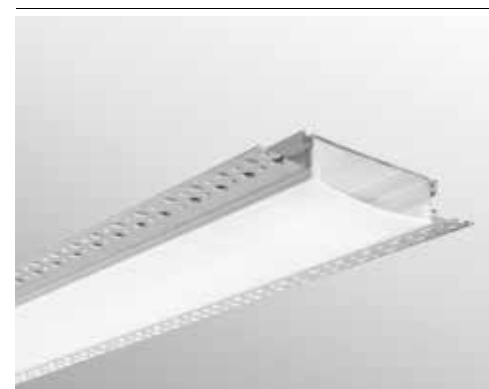

	length	colour
I-PROFILO-GORIZIA-XL		
8031414871094	2 m	aluminum

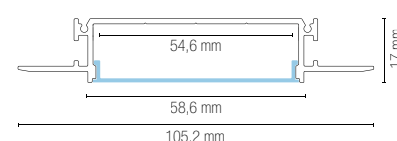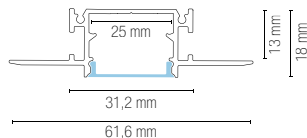

Accessori / Accessories	colour
--------------------------------	--------

2 pcs kit caps



I-PROFILO-GORIZIA-S-CAP	
8031414890491	transparent

I-PROFILO-GORIZIA-S-NER-CAP	
8031414890507	black

	colour
--	--------



I-PROFILO-GORIZIA-CAP	
8031414890484	silver


	colour
--	--------



I-PROFILO-GORIZIA-XL-CAP	
8031414890514	silver





Installazione ad incasso /
Recessed installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

BEND PROFILE

Profilo snodabile a rapido fissaggio nel cartongesso.
Diffusore opale e tappi inclusi /
Articulated quick fixing profile in plasteboard
with opal diffuser and caps included.

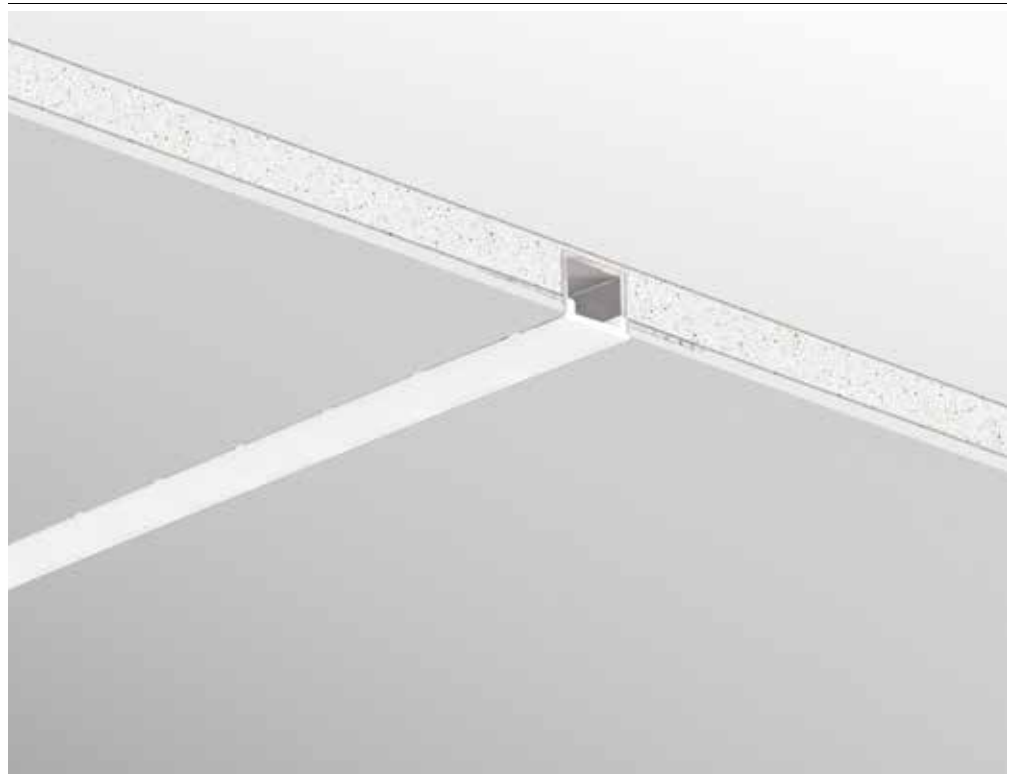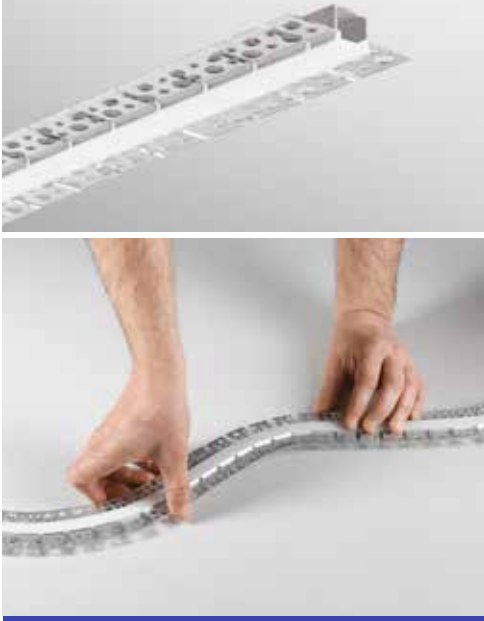


length | colour
[] []

Accessori / Accessories

colour |


2 pcs kit caps

I-PROFILO-BEND
8031414915811

2 m  aluminum

I-PROFILO-BEND-CAP
8031414923557

silver

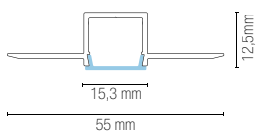


BEND



In.tec light **PROFILI E STRIP LED / PROFILES AND STRIP LED**


Installazione ad incasso /
Recessed installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

EDGE PROFILE

Profilo in alluminio a rapido
fissaggio nel cartongesso,
diffusore opale e tappi inclusi /
Quick fixing profile in plasterboard
with opal diffuser and caps included.

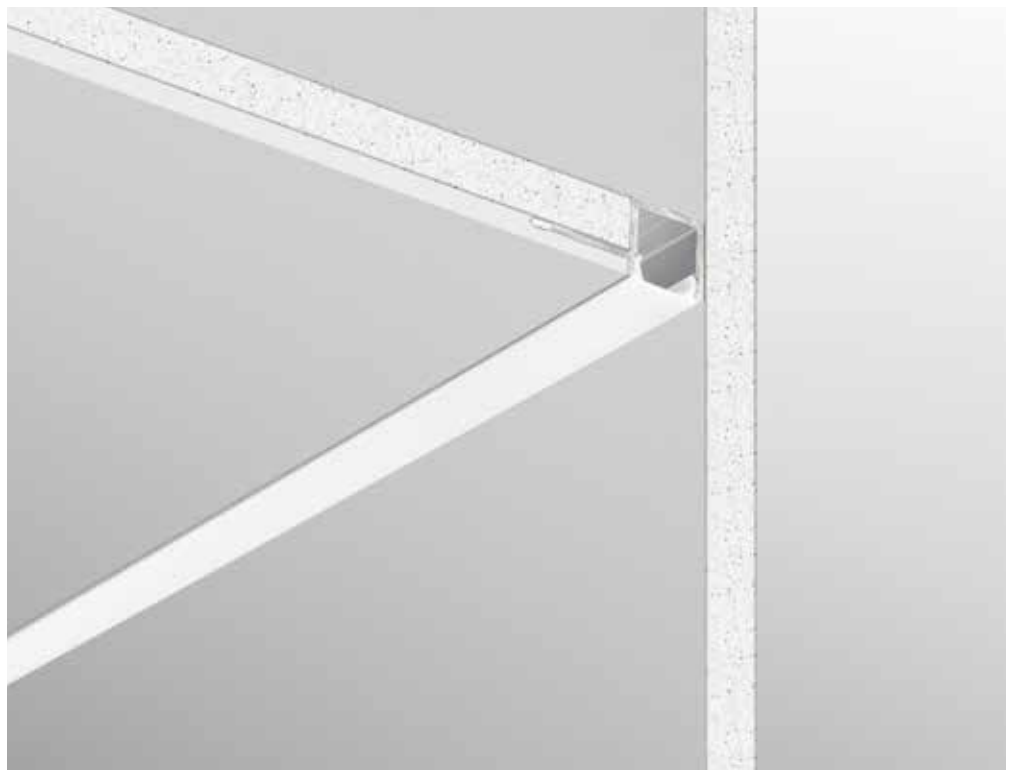

length | colour

I-PROFILO-EDGE
8031414897575

2 m | aluminum

Accessori / Accessories



colour




2 pcs kit caps

I-PROFILO-EDGE-CAP
8031414897582

silver

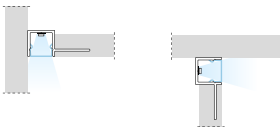

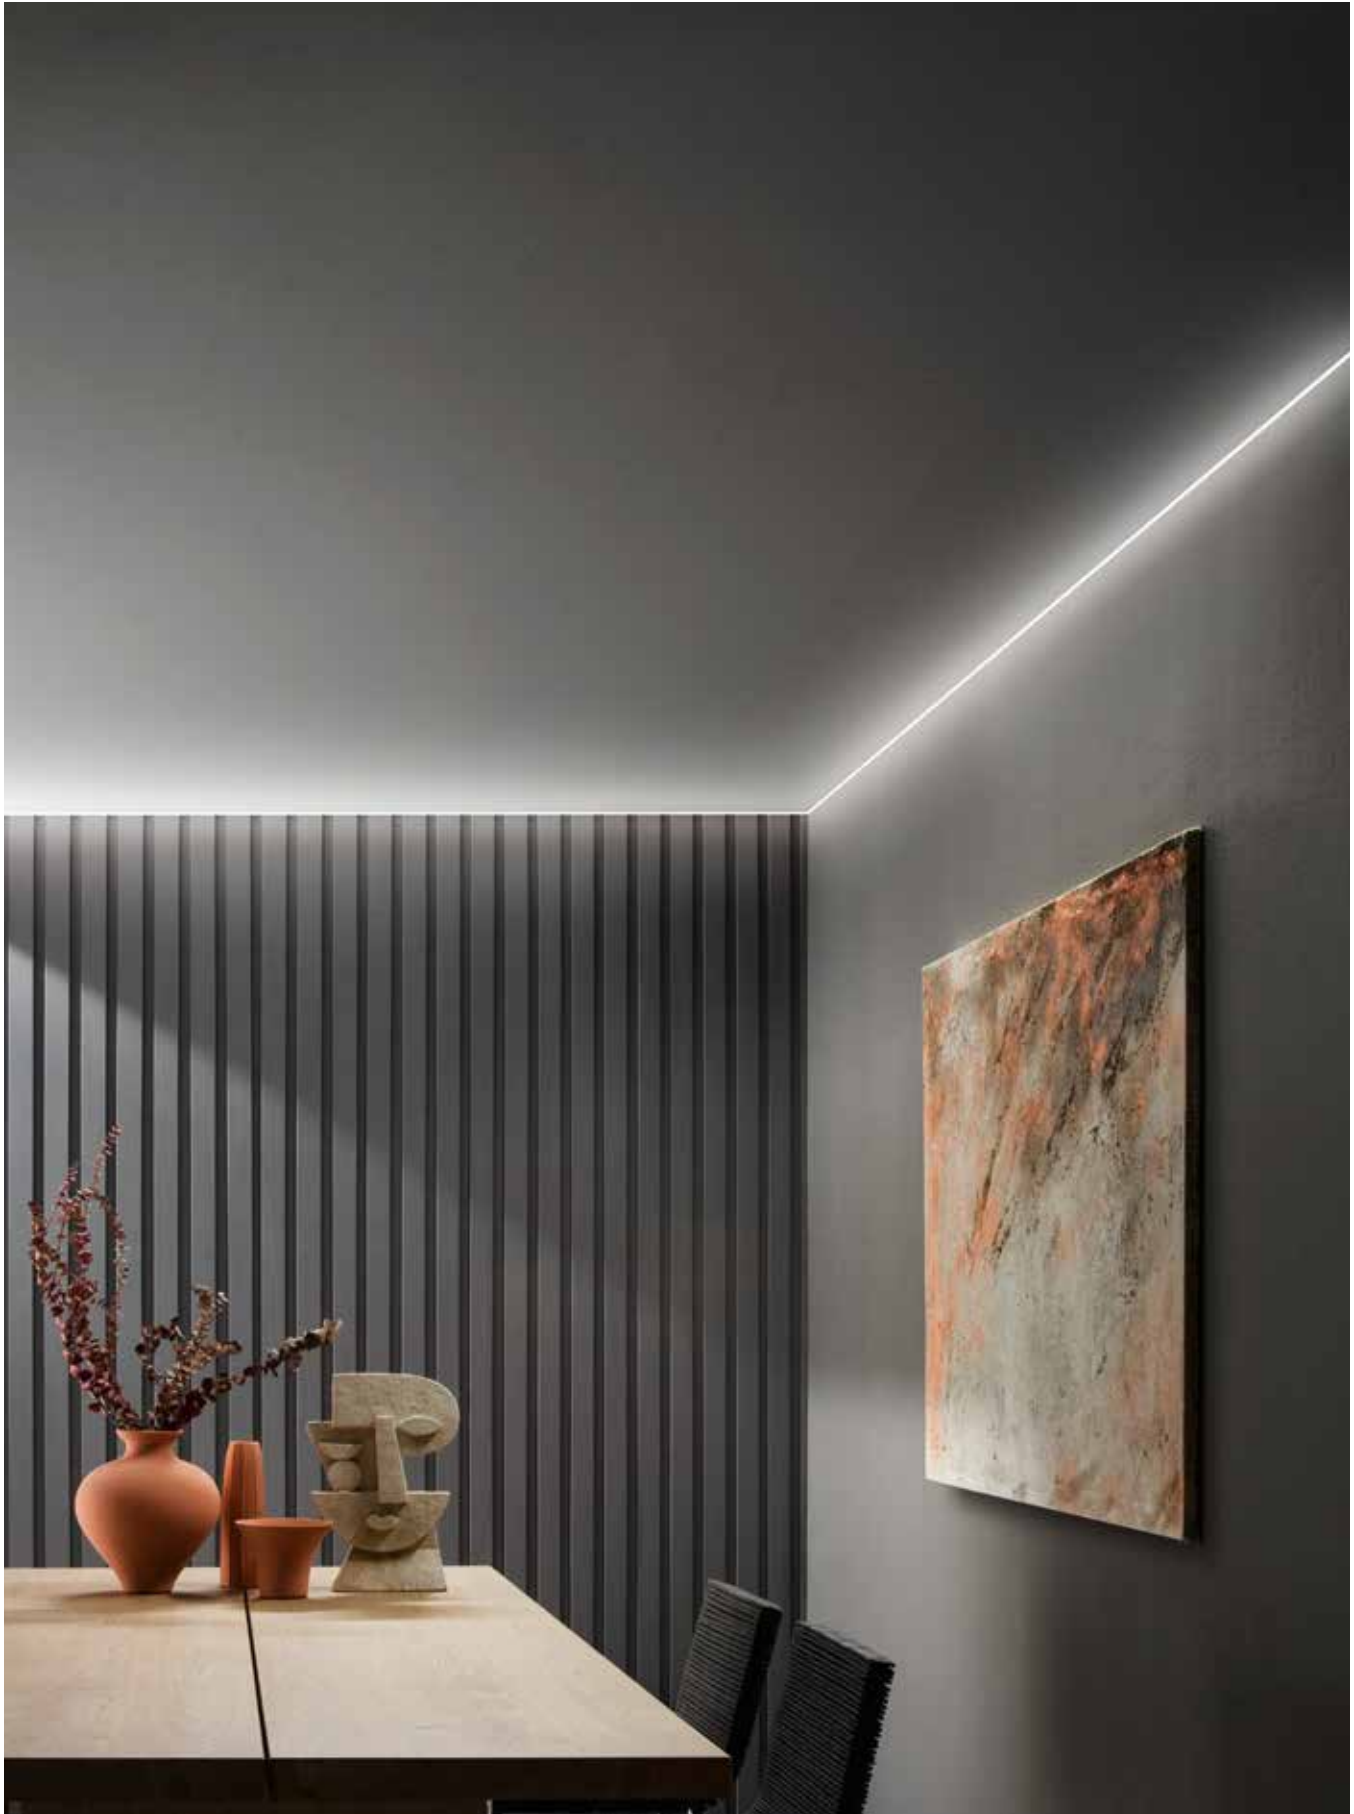

In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED



Installazione angolare ad incasso /
Recessed angular installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

RIDGE PROFILE

Profilo angolare in alluminio a
rapido fissaggio nel cartongesso,
diffusore opale e tappi inclusi /
Quick fixing angular profile in plasteboard
with opal diffuser and caps included.

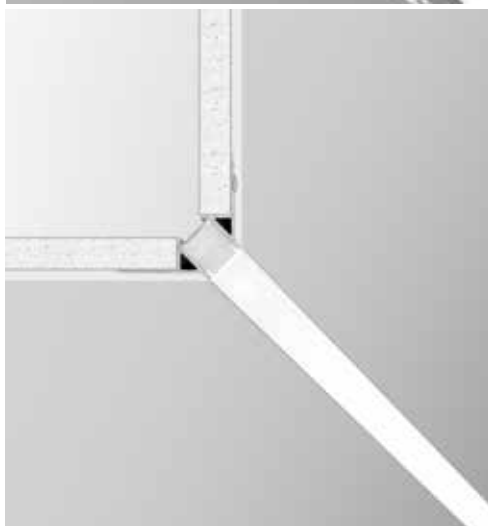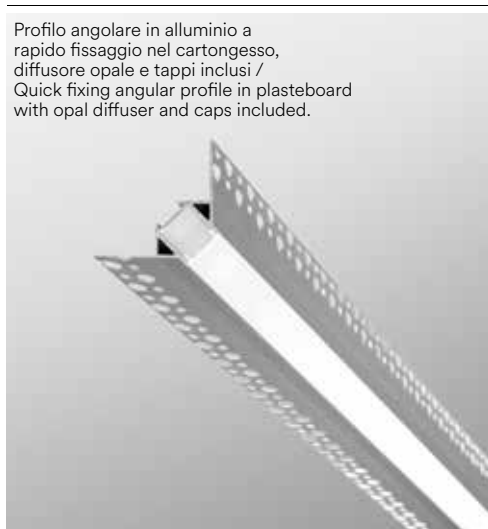

length | colour
 | 

I-PROFILO-RIDGE-2
8031414876570

2 m aluminum

Accessori / Accessories



colour




2 pcs kit caps

I-PROFILO-RIDGE-CAP
8031414890552

aluminum





Installazione angolare ad incasso /
Recessed angular installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

ANGLE PROFILE

Profilo angolare in alluminio a
rapido fissaggio nel cartongesso,
diffusore opale e tappi inclusi /
Quick fixing angular profile in plasteboard
with opal diffuser and caps included.

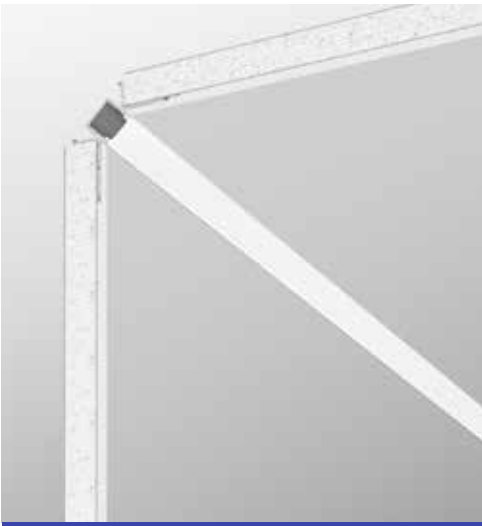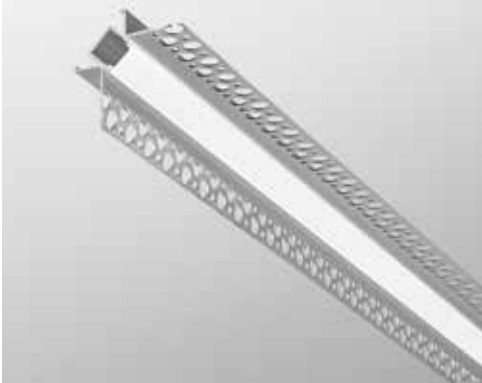

length | colour

I-PROFILO-ANGLE
8031414915798

2 m | ● | aluminum





Accessori / Accessories

colour

2 pcs kit caps

I-PROFILO-ANGLE-CAP
8031414923540

● | aluminum



PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

Installazione ad incasso /
Recessed installation




Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

BERLINO PROFILE

Profilo a rapido fissaggio nel cartongesso o superfici esterne, diffusore disponibile in due varianti, tappi e staffe incluse / Quick-fixing profile in plasterboard or exterior surfaces, diffuser available in two variants, caps and brackets included.




length  colour

I-PROFILO-BERLINO 8031434611212		1 m aluminum
I-PROFILO-BERLINO-2 8031440359405		2 m aluminum
I-PROFILO-BERLINO-2 BCO 8031414871070		2 m white
I-PROFILO-BERLINO-2 NER 8031414876617		2 m black

Accessori / Accessories

	colour
 2 m PC trasparent diffuser I-PROF-BERLINO2-DIFF 8031440357647	 transparent
 2 pcs kit caps I-PROFILO-BERLINO-CAP 8031414890446	 silver
 I-PROFILO-BERLINO-BCO-CAP 8031414890453	 white
 I-PROFILO-BERLINO-NER-CAP 8031414890460	 black






Installazione ad incasso o a superficie /
Recessed or surface installation








Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

ROMA PROFILE


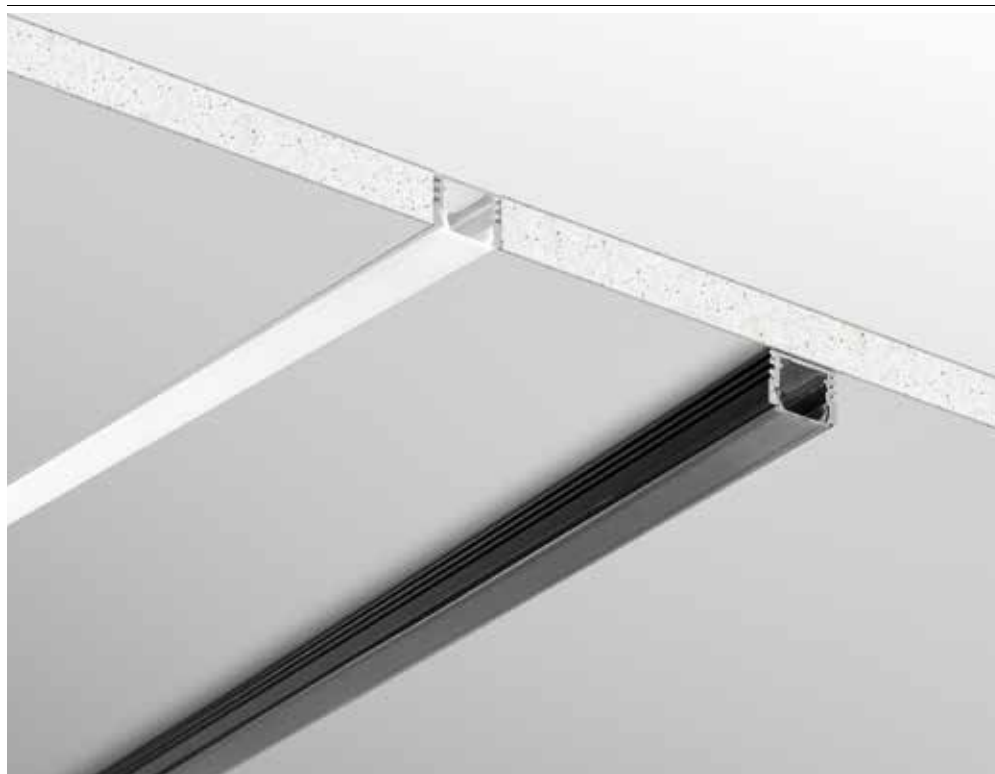
Profilo a rapido fissaggio nel cartongesso o superfici esterne, diffusore disponibile in due varianti, tappi e staffe incluse / Quick-fixing profile in plasterboard or exterior surfaces, diffuser available in two variants, caps and brackets included.



length  colour 

I-PROFILO-ROMA 8031434601213	1 m	 aluminum
I-PROFILO-ROMA-2 8031440359399	2 m	 aluminum
I-PROFILO-ROMA-2 NER 8031414876600	2 m	 black


Accessori / Accessories	colour
 2 m PC trasparent diffuser I-PROF-ROMA2-DIFF 8031440357630	 transparent
 2 pcs kit caps I-PROFILO-ROMA-CAP 8031414890569	 silver
 I-PROFILO-ROMA-NER-CAP 8031414890576	 black





In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED

Installazione ad incasso o a superficie /
Recessed or surface installation





Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

MICRO PROFILE

Profilo a rapido fissaggio
nel cartongesso o superfici
esterne, diffusore opale,
tappi e staffe inclusi /
Quick-fixing profile in
plasterboard or exterior
surfaces, opal diffuser, caps
and brackets included.



length | colour
 | 

Accessori / Accessories

colour |

I-PROFILO-MICRO
8031414888740



2 m aluminum




2 pcs kit caps

I-PROFILO-MICRO-CAP
8031414888757


silver




Installazione ad incasso /
Recessed installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

INCRO PROFILE

Profilo a rapido fissaggio
nel cartongesso o superfici
esterne, diffusore opale,
tappi e staffe inclusi /
Quick-fixing profile in
plasterboard or exterior
surfaces, opal diffuser, caps
and brackets included.

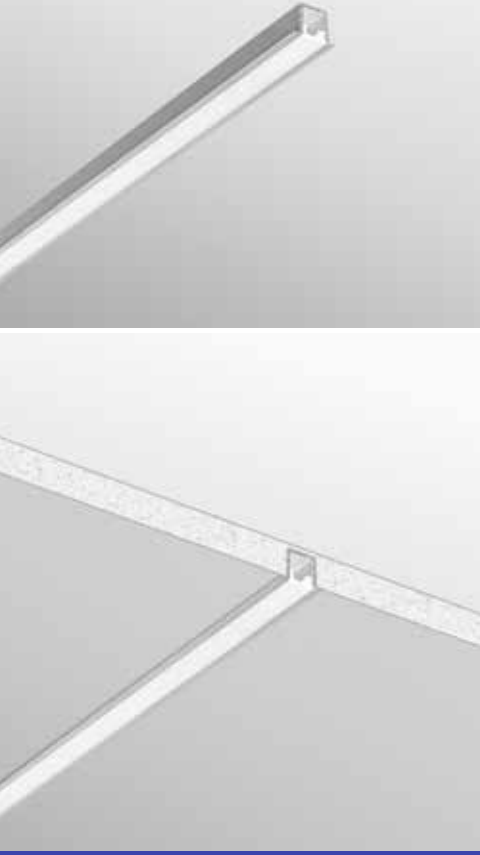

length | colour

I-PROFILO-INCRO
8031414888764

2 m | ● | aluminum

Accessori / Accessories


colour



2 pcs kit caps


I-PROFILO-INCRO-CAP
8031414888771

● | silver



PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

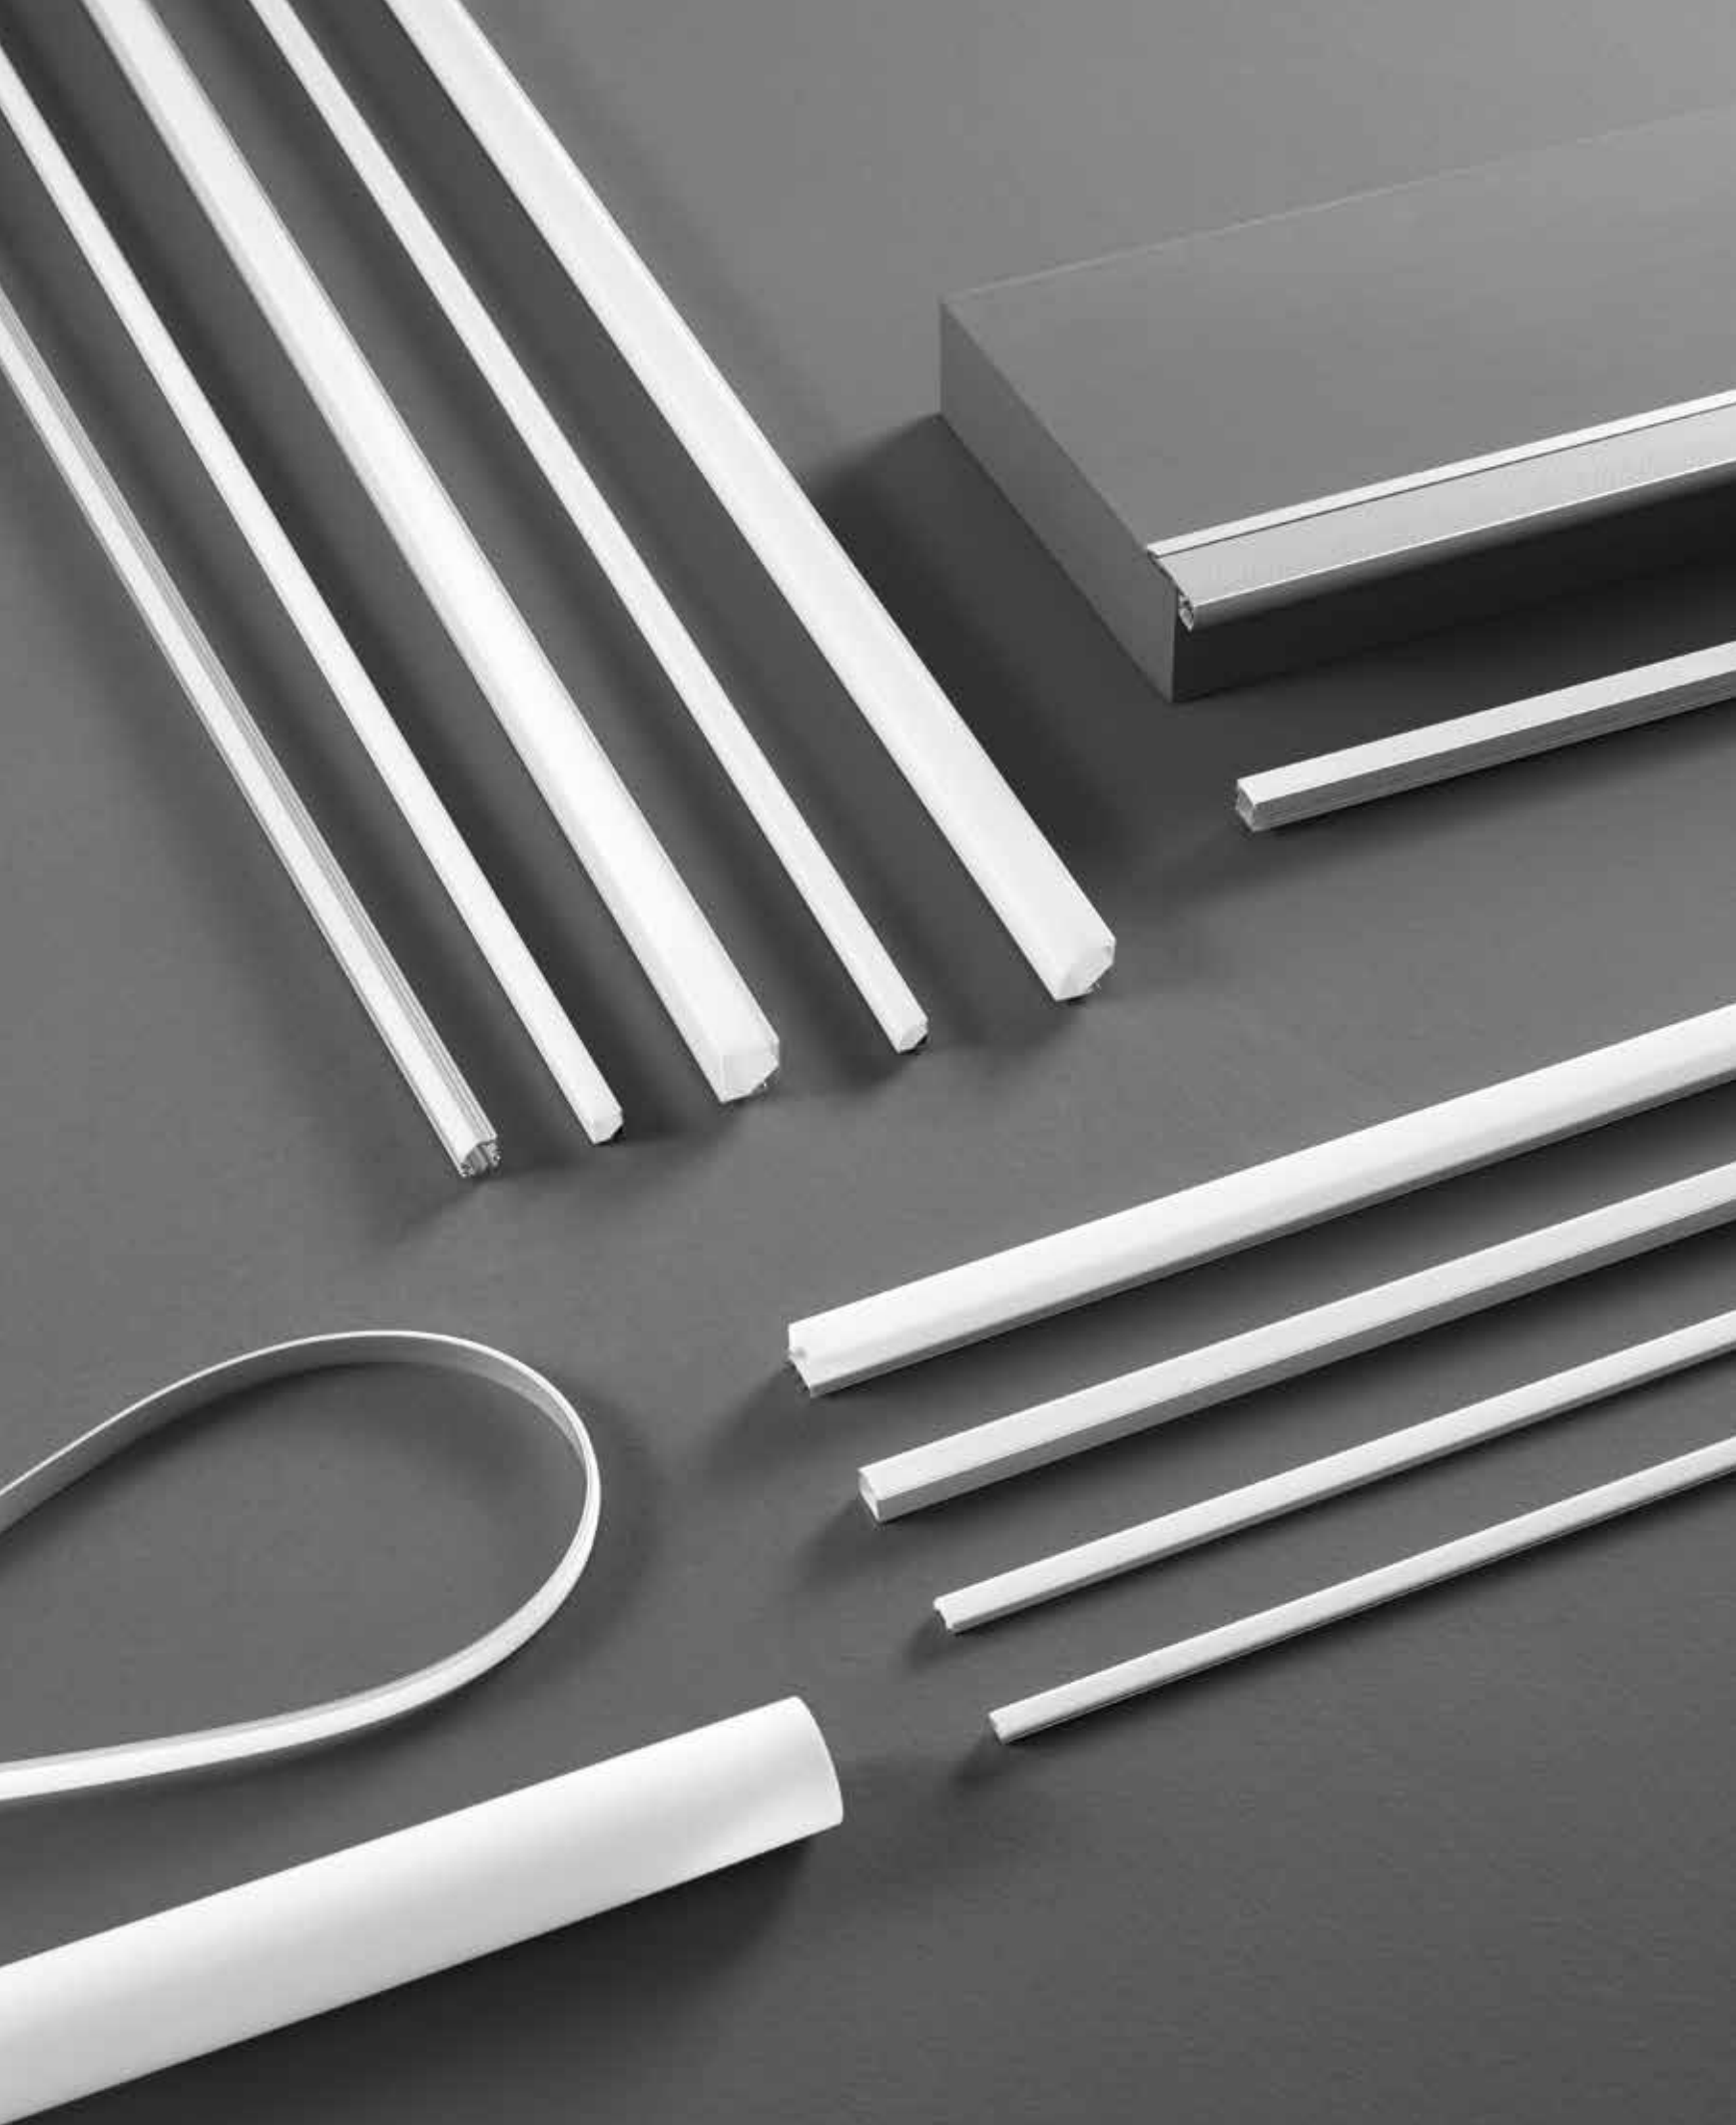

Profiles for surface installation


I profili per installazione a superficie (lineari, flessibili e angolari) sono progettati per cartongesso e muratura. Offrono un supporto resistente per l'illuminazione a LED, proteggendo le strisce durante l'installazione.

Il design moderno consente configurazioni personalizzate per adattarsi a diverse esigenze architettoniche.

Surface installation profiles (linear, flexible, and angular profiles) are designed for drywall and masonry. They offer durable support for LED lighting, protecting the strips during installation. The modern design allows custom configurations to suit different architectural needs.



Installazione a superficie /
Surface installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

LOOP PROFILE

Profilo in alluminio per installazione a muro/soffitto o sospensione, diffusore a emissione a 180°, tappi e staffe inclusi / Aluminum profile for wall/ceiling installation or suspension, 180° emission diffuser, caps and brackets included.



length | colour

I-PROFILO-LOOP-2
8031414881840

2 m | aluminum

Accessori / Accessories



colour



2 pcs kit caps


I-PROFILO-LOOP-CAP
8031414881857

silver






Installazione a superficie /
Surface installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

LINEA PROFILE

Profilo in alluminio,
tappi e staffe inclusi /
Aluminum profile, caps
and brackets included

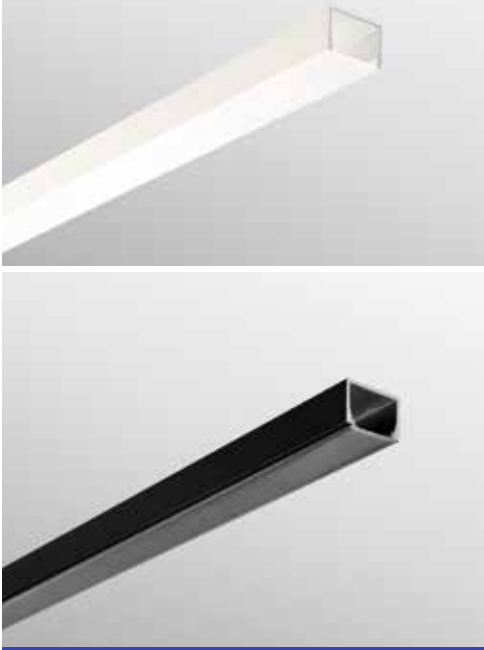

length | colour

I-PROFILO-LINEA-2-BCO

8031414881963

2 m

white

I-PROFILO-LINEA-2-NER

8031414881987

2 m

black

Accessori / Accessories

colour



2 pcs kit caps

I-PROFILO-LINEA-BCO-CAP

8031414881970



white



I-PROFILO-LINEA-NER-CAP

8031414882199

black





Installazione a superficie /
Surface installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

MILANO

PROFILE

Profilo con diffusore opale,
tappi e staffette inclusi /
Profile with opal diffuser
caps and brackets included.



length  colour

I-PROFILO-MILANO
8031434611854

1 m  aluminum

I-PROFILO-MILANO-2
8031440359412

2 m  aluminum

I-PROFILO-MILANO-2 BCO
8031414871100

2 m  white

Accessori / Accessories



2 m PC trasparent diffuser

I-PROF-MILANO2-DIFF
8031440357654

colour

 transparent



2 pcs kit caps



I-PROFILO-MILANO-CAP
8031414890538

 silver




I-PROFILO-MILANO-BCO-CAP
8031414890521

 white






Installazione a superficie /
Surface installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

ULTRA PROFILE

Profilo con diffusore opale,
tappi e staffette inclusi /
Profile with opal diffuser,
caps and brackets included.

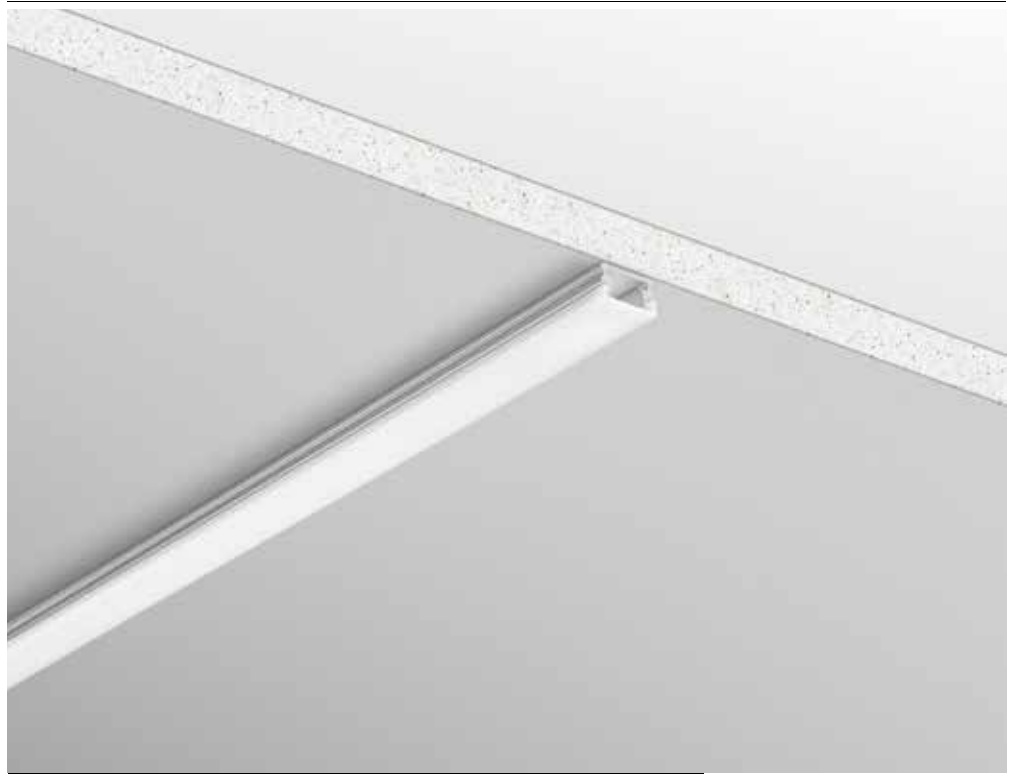

length

colour

I-PROFILO-ULTRA
8031414888788

2 m aluminum

Accessori / Accessories



colour




2 pcs kit caps


I-PROFILO-ULTRA-CAP
8031414890255

silver



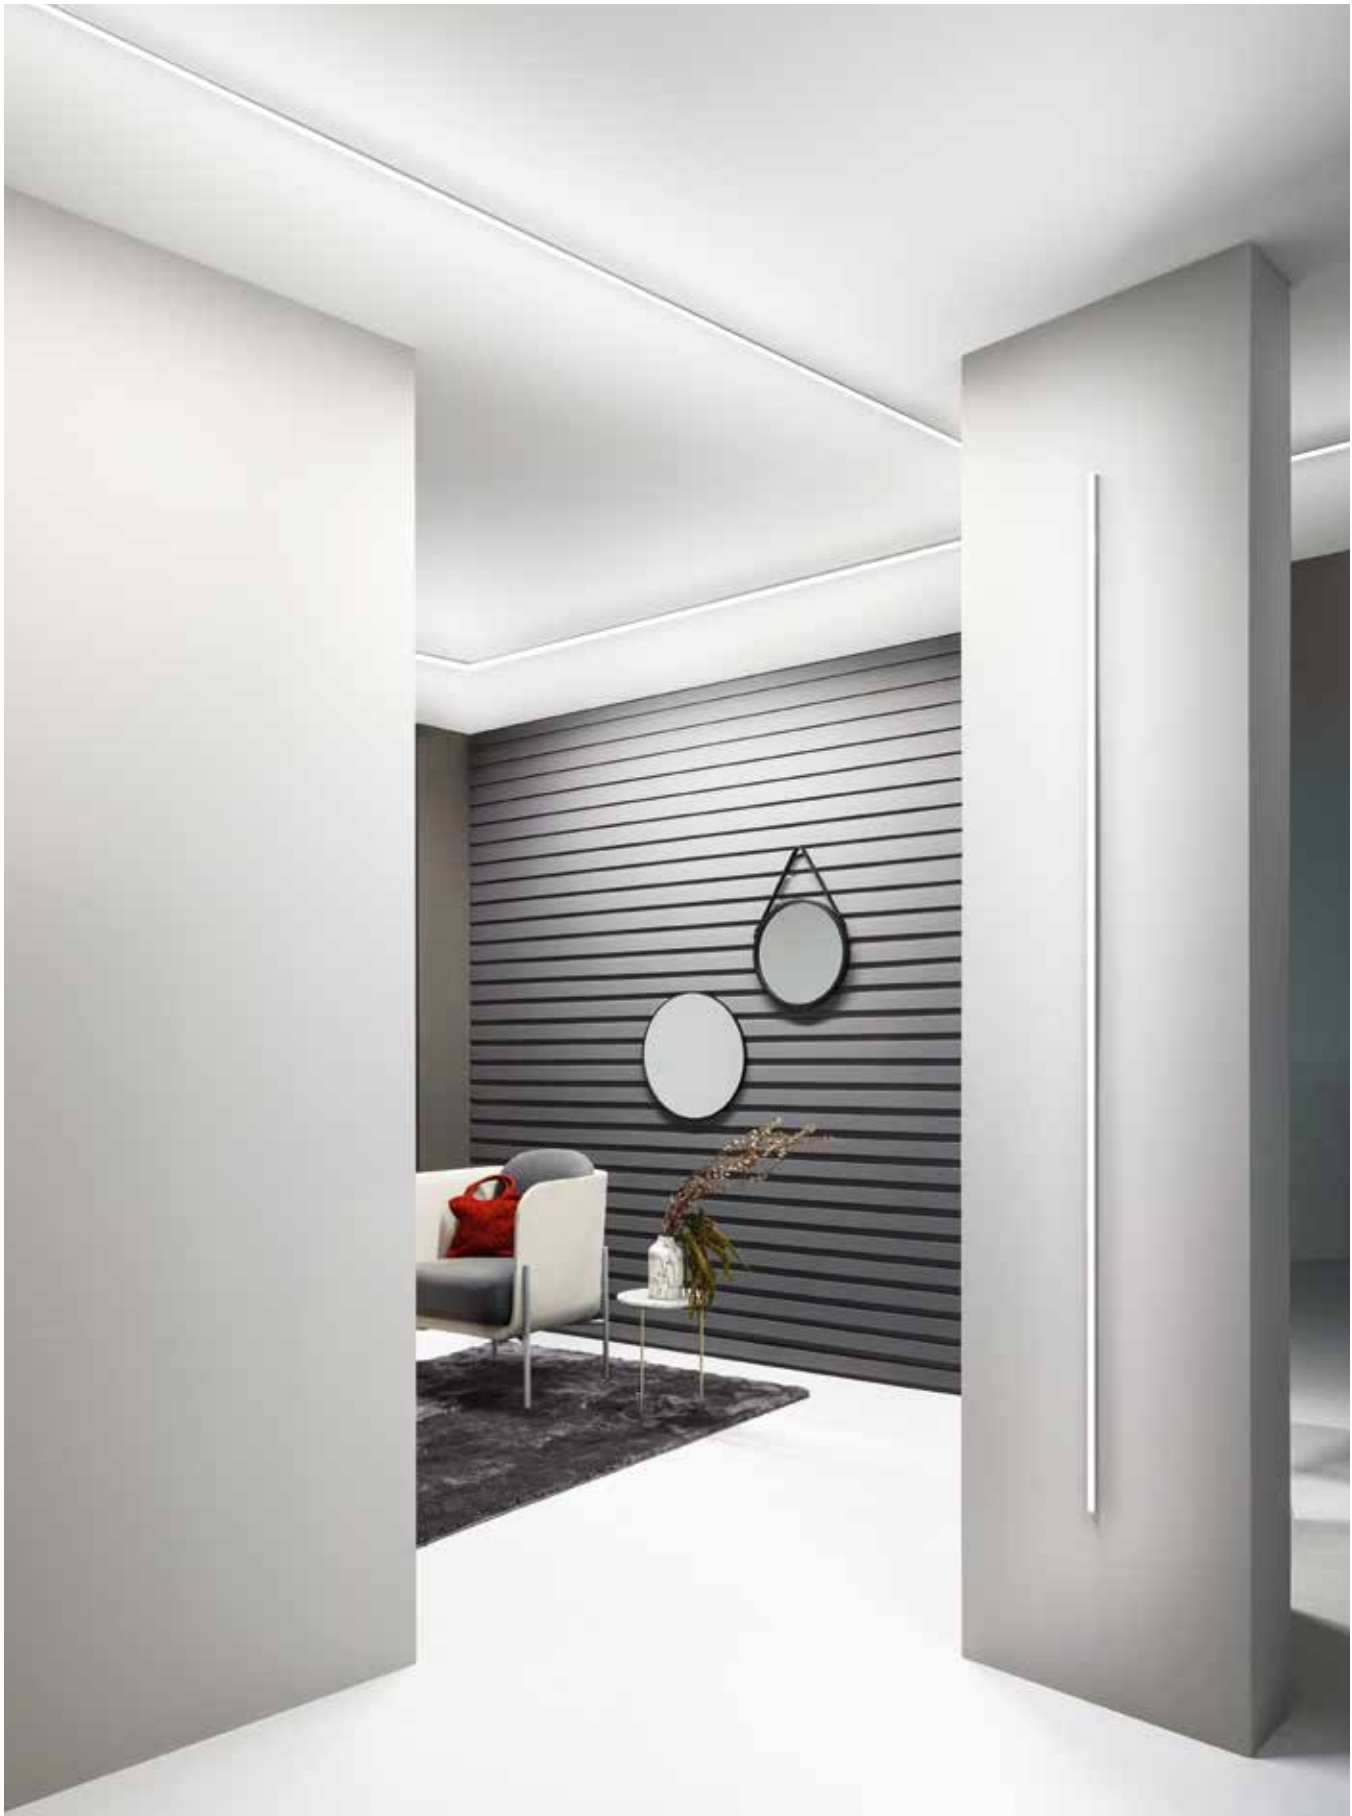

Installazione a superficie /
Surface installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

CAMELOT PROFILE

Profilo flessibile con diffusore
opale, tappi e staffette inclusi /
Flexible profile with opal diffuser,
caps and brackets included.



length

colour

I-PROFILO-CAMELOT
8031414871087

2 m aluminum

Accessori / Accessories



colour



2 pcs kit caps

I-PROFILO-CAMELOT-CAP
8031414890477


silver





In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED

Installazione a superficie /
Surface installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

TUBE PROFILE

Profilo in alluminio per installazione
a muro/soffitto o sospensione, diffusore
a emissione a 180°, tappi e staffe inclusi /
Aluminum profile for installation wall/ceiling
or suspension, 180° emission diffuser,
caps and brackets included.



Installazione a plafoniera /
Ceiling installation



Installazione a sospensione /
Suspended installation

length  colour 

I-PROFILO-TUBE-2
8031414881925

2 m  aluminum

Accessori / Accessories

colour



2 pcs kit caps

I-PROFILO-TUBE-CAP
8031414881932



 white



Kit suspension mounting system 2,5 m


I-PROFILO-TUBE-SOSP
8031414882243

 silver

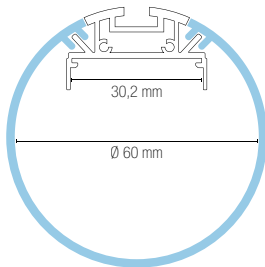




Installazione angolare a superficie /
Angular surface installation




Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

NEWYORK PROFILE

Profilo angolare a rapido fissaggio
nel cartongesso, diffusore opale,
tappi e staffe inclusi /
Quick-fixing angle profile in plasterboard,
opal diffuser, caps and brackets included.

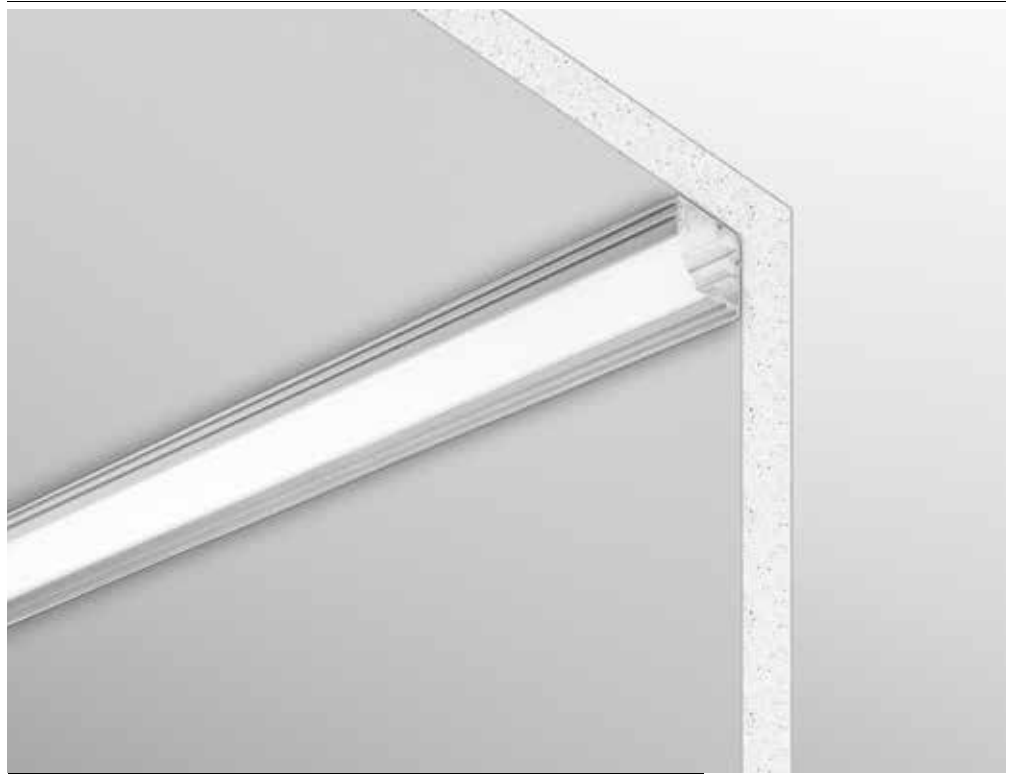

length  colour 

I-PROFILO-NEWYORK
8031434581218

1 m  aluminum

I-PROFILO-NEWYORK-2
8031440359382

2 m  aluminum

Accessori / Accessories

colour 



2 m PC trasparente diffuser

I-PROF-NEWYORK2-DIFF
8031440357623



 trasparente



2 pcs kit caps

I-PROFILO-NEWYORK-CAP
8031414890545


 silver





In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED

Installazione angolare a superficie /
Angular surface installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

DORIK PROFILE

Profilo angolare in alluminio
con fissaggio a parete, diffusore
opale, tappi e staffe inclusi /
Angular aluminium profile with
wall mounting, opal diffuser,
caps and brackets included.



length | colour

length | colour

Accessori / Accessories

colour

I-PROFILO-DORIK-16-2
8031414882205



2 m aluminum

I-PROFILO-DORIK-2
8031414876556



2 m aluminum



2 pcs kit caps for DORIK 16x16 mm

I-PROFILO-DORIK-16-CAP
8031414882212




●
silver




2 pcs kit caps for DORIK 29,7x29,7 mm

I-PROFILO-DORIK-CAP
8031414877768

●
silver



Installazione angolare a superficie /
Angular surface installation







Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

IONIK PROFILE

Profilo angolare in alluminio
con fissaggio a parete, diffusore
opale, tappi e staffe inclusi /
Angular aluminium profile with
wall mounting, opal diffuser,
caps and brackets included.



length | colour
 | 

length | colour
 | 

I-PROFILO-IONIK-16-2
8031414882229 2 m aluminum

I-PROFILO-IONIK-2
8031414876549 2 m aluminum

Accessori / Accessories



2 pcs kit caps for IONIK 16x16 mm

I-PROFILO-IONIK-16-CAP
8031414882236

colour





 silver



2 pcs kit caps for IONIK 29,7x29,7 mm

I-PROFILO-IONIK-CAP
8031414877775


 silver



PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

Installazione calpestabile a superficie /
Walkable surface installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

STEPWAY PROFILE

Profilo per gradini,
diffusore opale e tappi inclusi /
Step profile, opal diffuser
and caps included.



length

colour

I-PROFILO-STEPWAY
8031414876594

2 m aluminum

Accessori / Accessories



colour



2 pcs kit caps

I-PROFILO-STEPWAY-CAP
8031414877782

silver

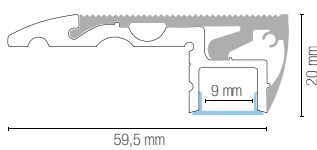



In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED


Installazione calpestabile ad incasso /
Walkable recessed installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

DRIVEWAY PROFILE

Profilo in alluminio a incasso carrabile,
tappi e staffe inclusi /
Driveway recessed aluminum profile,
caps and brackets included.

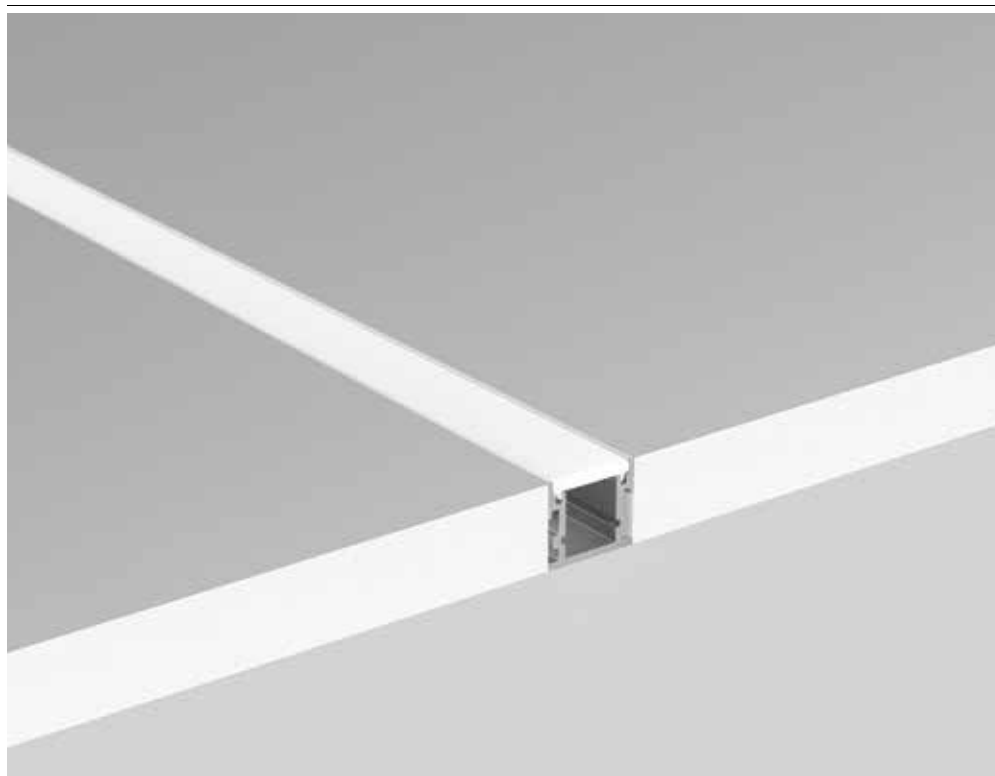


length  colour

I-PROFILO-DRIVEWAY-2
8031414881949

2 m  aluminum

pressure loads max 2000 kg



Accessori / Accessories

colour



2 pcs kit caps

I-PROFILO-DRIVEWAY-CAP
8031414881956

 silver







Profiles for veil installation


I profili per installazione a veletta sono progettati per consentire l'integrazione dell'illuminazione a LED nei soffitti e per distribuire uniformemente la luce nei vari ambienti, creando un'illuminazione diffusa. Questi profili permettono inoltre di nascondere le sorgenti luminose e i cablaggi, contribuendo a un aspetto estetico più pulito e moderno.

Veil installation profiles are designed to allow LED lighting to be integrated into ceilings and to evenly distribute light in different rooms, creating diffuse lighting. These profiles also allow light sources and wiring to be hidden, contributing to a cleaner, more modern aesthetic appearance.



Installazione a veletta /
Veil installation

GASH PROFILE



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

Profilo a veletta bianco,
diffusore opale e tappi inclusi /
White veil profile, opal
diffuser and caps included.



Applicazione con staffe I-PROFILO-GASH-STL /
Installation by brackets I-PROFILO-GASH-STL




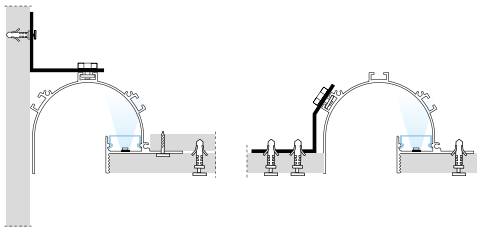
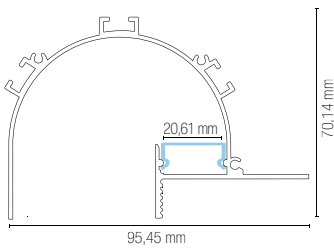
Applicazione con staffe I-PROFILO-GASH-STZ /
Installation by brackets I-PROFILO-GASH-STZ



length  colour 

I-PROFILO-GASH
8031414890262

2 m  aluminum



Accessori / Accessories



2 pcs kit caps

I-PROFILO-GASH-CAP
8031414890279

colour 

white




2 pcs kit brackets with included screws

I-PROFILO-GASH-STL
8031414889990

aluminum 




I-PROFILO-GASH-STZ
8031414890286

aluminum 




Installazione a veletta /
Veil installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

TRIM PROFILE

Profilo a veletta, diffusore
opale e tappi inclusi /
Veil profile, opal diffuser
and caps included.

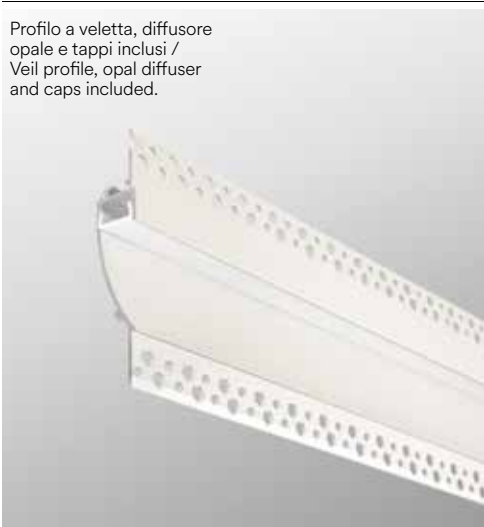

colour

I-PROFILO-TRIM-2
8031414876563

2 m

white



Accessori / Accessories



colour



2 pcs kit caps

I-PROFILO-TRIM-CAP
8031414890583

white

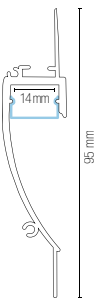

Installazione a veletta /
Veil installation





Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

MOP PROFILE

Profilo a veletta, diffusore
opale e tappi inclusi /
Veil profile, opal diffuser
and caps included.



length | colour
 | 

I-PROFILO-MOP
8031414890019

2 m | white




Accessori / Accessories

colour |

2 pcs kit caps


I-PROFILO-MOP-CAP
8031414888733

white

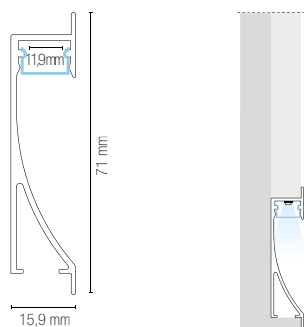

In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED

Installazione a veletta /
Veil installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

VEIL PROFILE



length | colour

I-PROFILO-VEIL-2
8031414881901

2 m | white

Accessori / Accessories


colour



2 pcs kit caps

I-PROFILO-VEIL-CAP
8031414881918

white

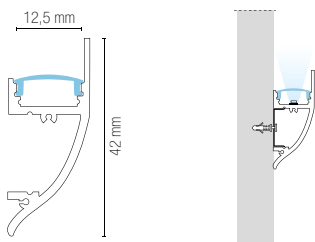

Installazione a veletta /
Veil installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

WING PROFILE



length
colour

I-PROFILO-WING
8031414915804

2 m
white



Accessori / Accessories


colour



2 pcs kit caps

I-PROFILO-WING-CAP
8031414923564


white

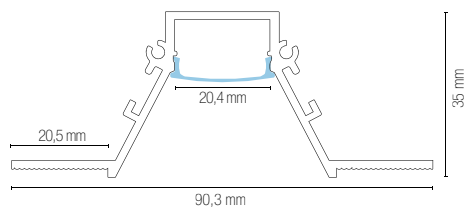

PROFILO STRIP LED / PROFILES AND STRIP LED

In.tec light

Installazione a veletta /
Veil installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

DUAL PROFILE

Profilo in alluminio a doppia emissione,
tappi e staffe inclusi /
Double-emitting aluminum profile,
caps and brackets included.



length | colour

I-PROFILO-DUAL-2-BCO
8031414881864

2 m | white

I-PROFILO-DUAL-2-NER
8031414881888

2 m | black

Accessori / Accessories

colour



2 pcs kit caps


I-PROFILO-DUAL-BCO-CAP
8031414881871

white



I-PROFILO-DUAL-NER-CAP
8031414881895

black

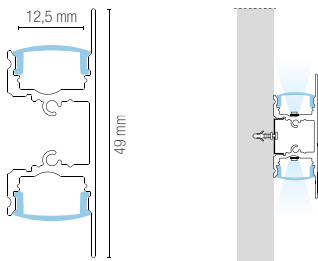



In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED




Paintable gypsum profile, recessed and surface installation

I profili in gesso verniciabile, progettati per un'installazione a incasso e/o superficie, sono disponibili in varianti lineari e decorative. Adatti all'utilizzo su cartongesso e muratura, offrono una solida versatilità e garantiscono un risultato tecnico ed estetico di alto livello per una vasta gamma di progetti illuminotecnici.

Paintable gypsum profiles, designed for recessed and/or surface installation, are available in linear and decorative variants. Suitable for use on plasterboard and masonry, they offer solid versatility and ensure a high level of technical and aesthetic result for a wide range of lighting projects.




Installazione su cartongesso /
Installation on plasterboard



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

INVISILINE PROFILE

Lastra in cartongesso con profilo in alluminio integrato /
Plasterboard slab with integrated aluminum profile

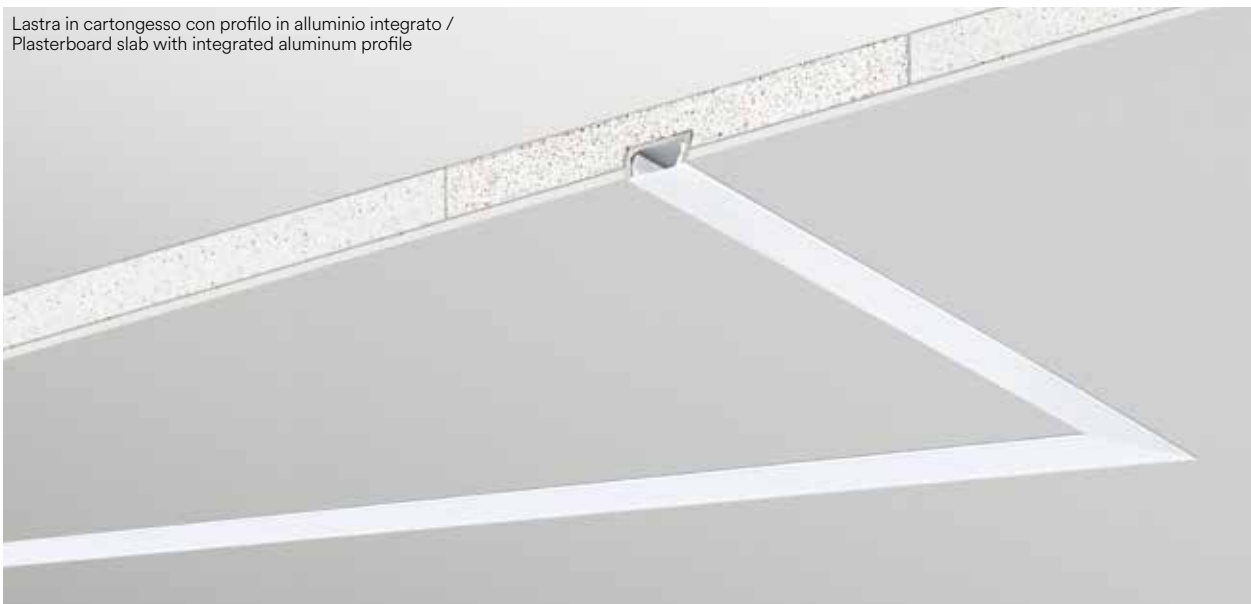

Kit 3 pz / Kit 3 pcs

length







length

I-INVISILINE-2
8031414916221

2 m

I-INVISILINE-L
8031414916238

2 m

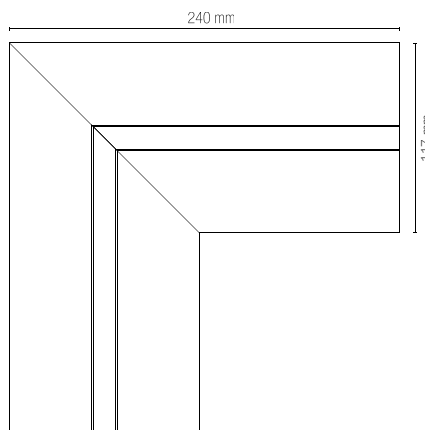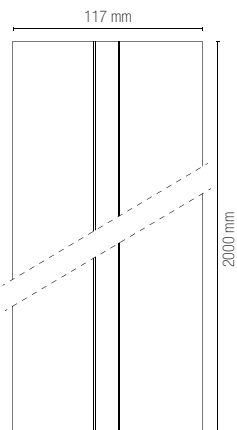



Imtec light PROFILI E STRIP LED / PROFILES AND STRIP LED

Profili in gesso verniciabile /
Paintable gypsum profiles

PROFY BIS PROFILE

PROFY MONO PROFILE

Profilo a veletta,
diffusore opale e
tappi inclusi /
Veil profile, opal diffuser
and caps included.



Profilo a veletta,
diffusore opale e
tappi inclusi /
Veil profile, opal diffuser
and caps included.



I-PROFY-BIS
8031414882359

Profilo in gesso per led
biemissione, incluso anima
alluminio e diffusori in PC /
Gypsum profile for led
double emission including
PC cover and aluminum

Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm

I-PROFY-BIS-L
8031414882380

Angolo L per profilo in gesso per
led biemissione incluso anima
in alluminio e diffusori in PC /
Gypsum corner profile including
PC cover and aluminum







I-PROFY-MONO
8031414882366


Profilo in gesso per led singola
emissione, angolo 90° anima
alluminio e diffusore in PC /
Gypsum profile for LED single emission
including PC cover and aluminum

Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm

I-PROFY-MONO-L
8031414882397

Angolo L per profilo in gesso per
led singola emissione, angolo 90°,
anima alluminio e diffusore in PC /
Gypsum corner profile including
PC cover and aluminum

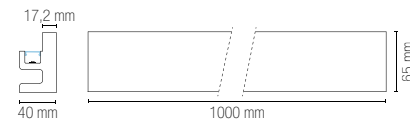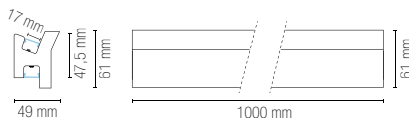



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435



PROFY BIS e PROFY MONO



In.tec light PROFY E STRIP LED / PROFILES AND STRIP LED

PROFY GIMEL PROFILE

PROFY VELA PROFILE

Profilo a veletta,
diffusore opale e
tappi inclusi /
Veil profile, opal diffuser
and caps included.



Profilo a veletta,
diffusore opale e
tappi inclusi /
Veil profile, opal diffuser
and caps included.



I-PROFY-GIMEL 8031414882410

Profilo in gesso per led singola
emissione, anima alluminio
e diffusore in PC /
Gypsum profile for led
single emission including
PC cover and aluminum

Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm

I-PROFY-GIMEL-L 8031414882427

Angolo L per profilo in gesso
per led, singola emissione,
anima alluminio e diffusore in PC /
Gypsum corner profile including
PC cover and aluminum







I-PROFY-VELA 8031414882373

Profilo in gesso per led singola
emissione, anima alluminio
e diffusore in PC /
Gypsum profile for led
single emission including
PC cover and aluminum

Diffusori in PC / PC-diffuser
1000 × 61 × 41 mm

I-PROFY-VELA-L 8031414882403

Angolo L per profilo in gesso
per led, singola emissione,
anima alluminio e diffusore in PC /
Gypsum corner profile including
PC cover and aluminum

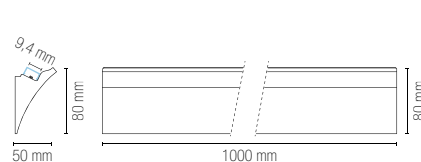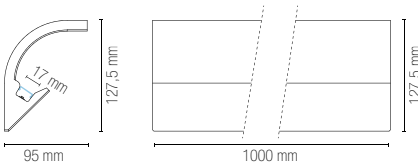



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435



PROFY GIMEL e PROFY VELA



In.tec light PROFY E STRIP LED / PROFILES AND STRIP LED





Installazione a superficie /
Surface installation



Strip LED non inclusa
vedi p. 398 a p. 435 /
LED strip not included
see p. 398 to p. 435

PIANO PROFILE

Profilo base per disposizione strip /
Profile dissipation base.

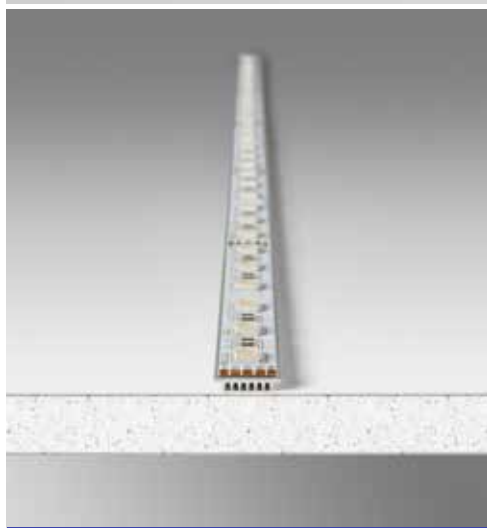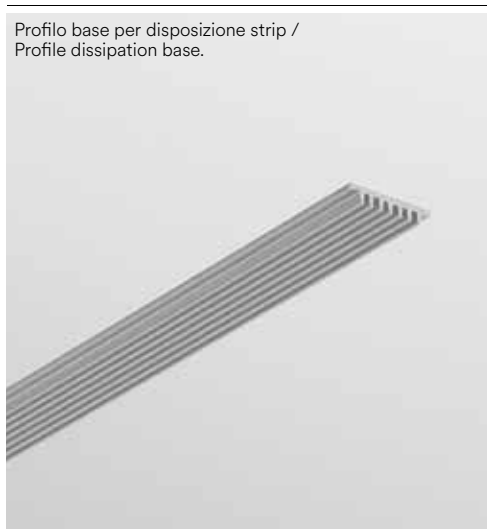




length  colour 



I-PROFILO-PIANO-2

8031414878802

2 m  aluminum



PROFILO STRIP LED / PROFILES AND STRIP LED

In.tec light

Accessori per barre LED.
LED bar accessories.




STRIP-HANDESENSOR-W

8031414879335


Scheda rilevatore movimento mano per strip singolo colore input DC12V-24V output DC12V-24V 60/120W 5A max

Hand motion card for single color strip DC12V-24V output DC12V-24V 60/120W 5A max



Funzioni sensore interruttore
Raggio di rilevamento 5-15 cm

Motion sensor switch
Detection range 5-15 cm




STRIP-PIRESENSOR

8031414879373


Scheda sensore movimento pir per strip Input DC12V-24V output DC12V-24V 60/120W 5A max

Pir motion sensor card for strip DC12V-24V output DC12V-24V 60/120W 5A max



Funzioni sensore movimento

Motion sensor function




STRIP-TOUCH-W

8031414879359

Scheda pulsante touch per strip singolo colore input DC12V-24V output DC12V-24V 60/120W 5A max

Touch button card for single color strip DC12V-24V output DC12V-24V 60/120W 5A max

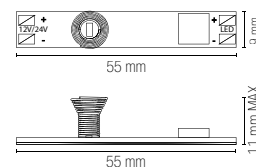

Funzioni sensore touch
Passando sul sensore entro i 0,5 secondi si attiva la funzione ON/OFF

Touch sensor function
When touching the sensor within 0,5 second the switch status changes ON/OFF

Restando sul sensore oltre i 0,5 secondi si attiva la funzione di regolazione di intensità luminosa (massima - minima - massima)

When touching the sensor for over 0,5 second the switch turn to adjustment status (high - low - high)











I-PROFILO-INC-STAFFE


8031414890002

Molla per incasso adatto per profili MILANO/ROMA/BERLINO, kit 2 pz

Metal spring for profile MILANO/ROMA/BERLINO, 2pcs kit

	<p>STRIP24V-8-CONN 8031414925940</p> <p>Easy connector lineare luce continua per strip LED da 8mm</p>	<p>Linear easy connector continuous light for strip LED strip 8mm</p>
	<p>STRIP24V-8-NEST 8031414925964</p> <p>Innesto elettrico easy connection luce continua per strip LED da 8mm</p>	<p>Easy connection electrical nest continuous light for LED strip 8mm</p>
	<p>STRIP24V-8-FLEX 8031414925988</p> <p>Easy connector flessibile luce continua per strip LED da 8mm</p>	<p>Flexible easy connector continuous light for strip LED strip 8mm</p>
	<p>STRIP24V-10-CONN 8031414925957</p> <p>Easy connector lineare luce continua per strip LED da 10mm</p>	<p>Linear easy connector continuous light for strip LED strip 10mm</p>
	<p>STRIP24V-10-NEST 8031414925971</p> <p>Innesto elettrico easy connection luce continua per strip LED da 10mm</p>	<p>Easy connection electrical nest continuous light for LED strip 10mm</p>
	<p>STRIP24V-10-FLEX 8031414925995</p> <p>Easy connector flessibile luce continua per strip LED da 10mm</p>	<p>Flexible easy connector continuous light for strip LED strip 10mm</p>
	<p>STRIP24V-8-L-CONN 8031414926008</p> <p>Easy connector angolare luce continua per strip LED da 8mm</p>	<p>Easy connector angular continuous light for LED strip 8mm</p>
	<p>STRIP24V-10-L-CONN 8031414926015</p> <p>Easy connector angolare luce continua per strip LED da 10mm</p>	<p>Easy connector angular continuous light for LED strip 10mm</p>

STRIP24V COB DIGITAL



EASY
DOMOTICA

Rotolo 5 metri strip led digital.
Protocollo WS2811.

Roll 5 meters digital strip-led. Protocollo WS2811.



Driver p. 843-852
Controller p. 858-859



Materiale

kapton
senza silicone

Temperatura colore

3000K / 4000K / 6500K



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature

3000K / 4000K / 6500K



Driver

DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

STRIP24V-COB-SPI-C

8031414925513

lumen/m

total lumen

colour
temp.



1020 lm

5100 lm

STRIP24V-COB-SPI-M

8031414925520

lumen/m

total lumen



1125 lm

5625 lm

STRIP24V-COB-SPI-F

8031414925537

lumen/m

total lumen



1095 lm

5475 lm



light source

COB


watt/m

15W


Fotometria del prodotto / Photometric curve

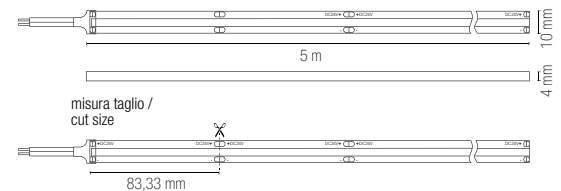

Recommended Profiles p. 336 to p. 397

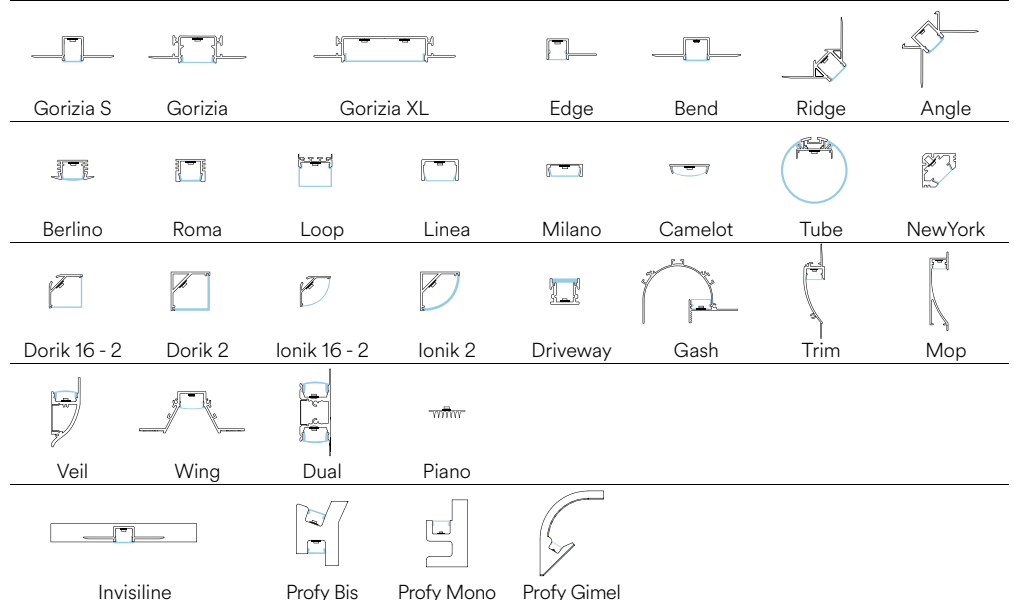

STRIP24V COB RGB DIGITAL

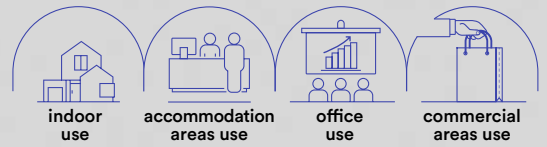

EASY DOMOTICA

**Rotolo 5 metri strip led digital.
Protocollo WS2811.**

Roll 5 meters digital strip-led. Protocollo WS2811.



Driver p. 843-852
Controller p. 858-859



colour temp.

STRIP24V-COB-SPI-RGB
8031414925544



light source	COB 5050
watt/m	15W

Materiale

kapton
senza silicone

Temperatura colore

RGB



Driver

DC24V
tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature

RGB





Driver

DC24V
constant voltage
not included


Life time and on/off

50.000h
>25.000 on/off

Fotometria del prodotto / Photometric curve

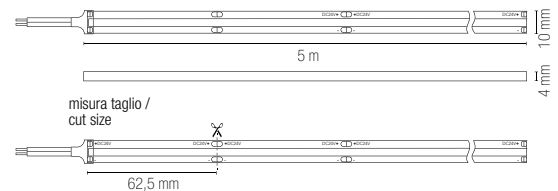

Recommended Profiles p. 336 to p. 397

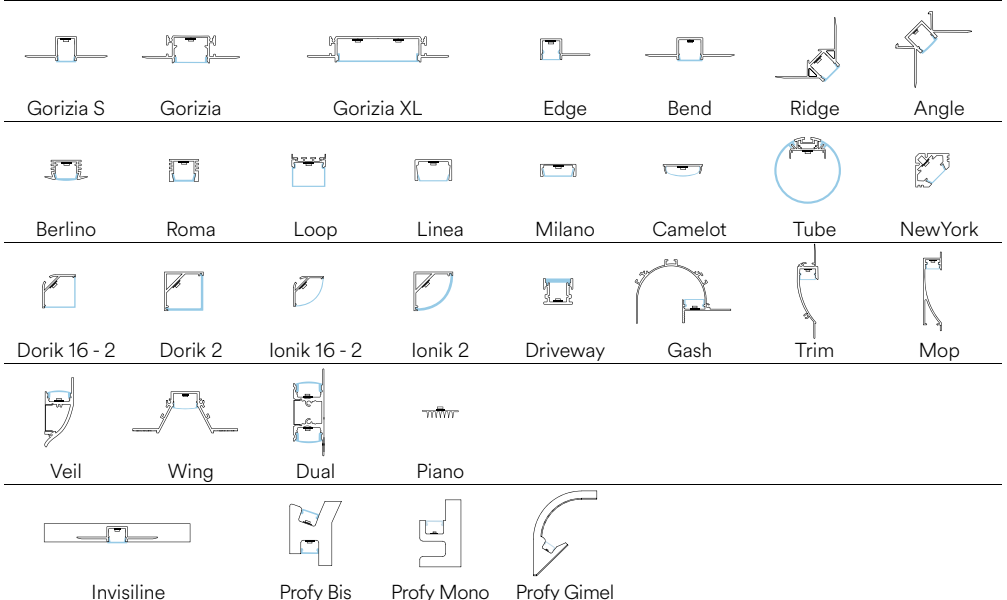

In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED

STRIP24V 2835 IP67 120



EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton con rivestimento in silicone

Temperatura colore
3000K / 4000K / 6500K



Driver
DC24V
tensione costante non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton with silicone cover

Colour temperature
3000K / 4000K / 6500K



Driver
DC24V
constant voltage not included

Life time and on/off
50.000h
>25.000 on/off

STRIP24V-2835IP67-120C

8031414925551
lumen/m 1800 lm
total lumen 9000 lm



STRIP24V-2835IP67-120M

8031414925568
lumen/m 1980 lm
total lumen 9900 lm





STRIP24V-2835IP67-120F

8031414925575
lumen/m 1890 lm
total lumen 9450 lm




light source SMD 2835
watt/m 18W
led/m 120


Fotometria del prodotto / Photometric curve

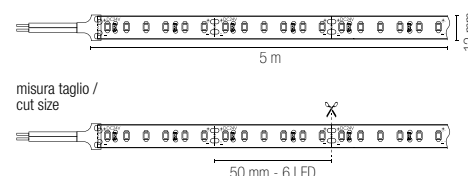

Recommended Profiles p. 336 to p. 397

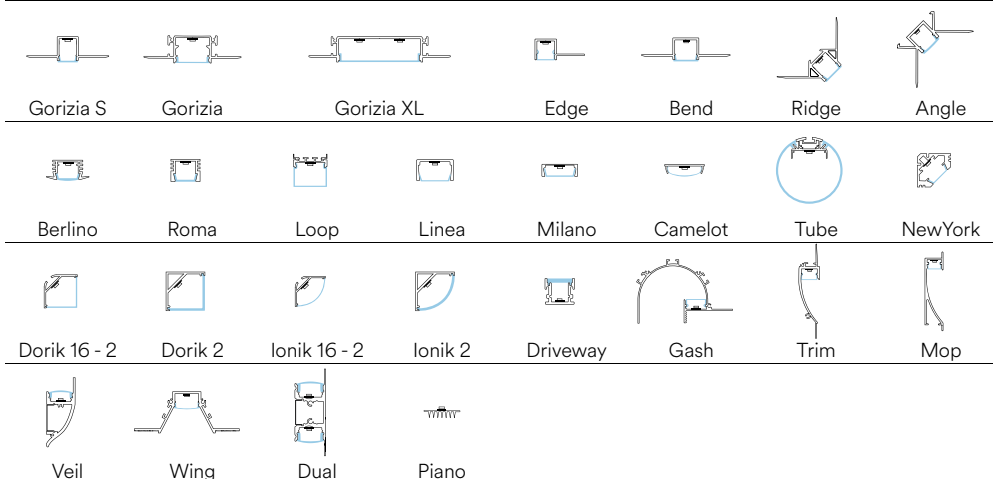

STRIP24V 2835 5W

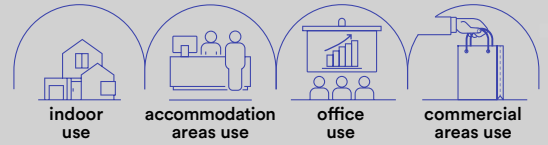

EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



colour temp.



475 lm
2375 lm



500 lm
2500 lm



490 lm
2450 lm

STRIP24V-2835-5C

8031414925582

lumen/m

total lumen

STRIP24V-2835-5M

8031414925599

lumen/m

total lumen

STRIP24V-2835-5F

8031414925605

lumen/m

total lumen

light source

SMD 2835

watt/m

5W

led/m

60

Materiale

kapton
senza silicone

Temperatura colore

3000K / 4000K / 6500K



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature

3000K / 4000K / 6500K



Driver


DC24V

constant voltage
not included


Life time and on/off

50.000h
>25.000 on/off

Fotometria del prodotto / Photometric curve




Recommended Profiles p. 336 to p. 397

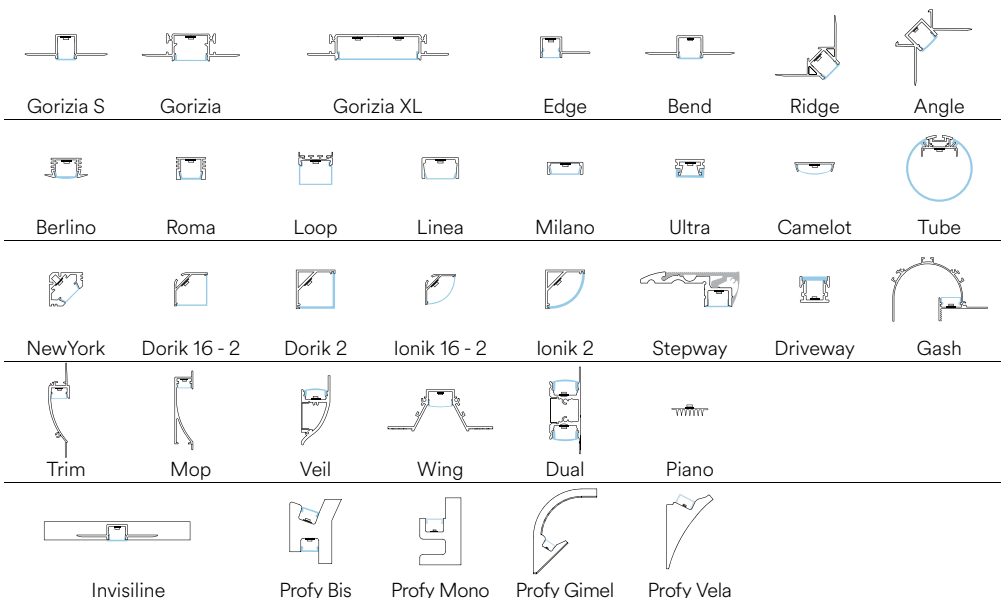

PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

STRIP24V R20 2835 120

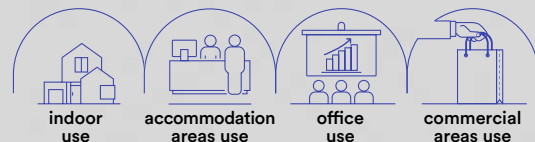

EASY
DOMOTICA

Rotolo 20 metri strip led.
Roll 20 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K



Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone

Colour temperature
3000K / 4000K



Driver
DC24V
constant voltage
not included

Life time and on/off
50.000h
>25.000 on/off

STRIP24V-R20-2835-120C

8031414925612
lumen/m

colour temp.
 1800 lm



STRIP24V-R20-2835-120M

8031414925629
lumen/m


1980 lm

light source	SMD 2835
watt/m	18W
led/m	120


Fotometria del prodotto / Photometric curve

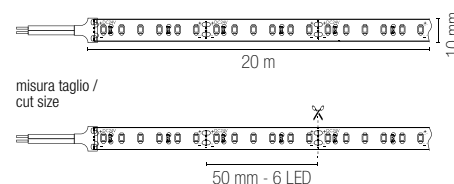

Recommended Profiles p. 336 to p. 397

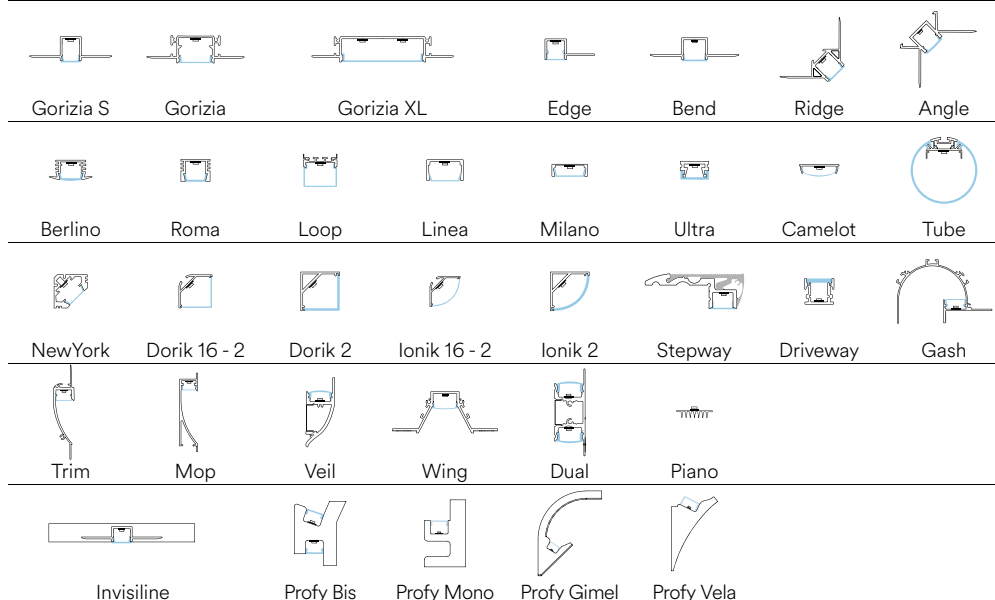

STRIP24V R20 COB 480

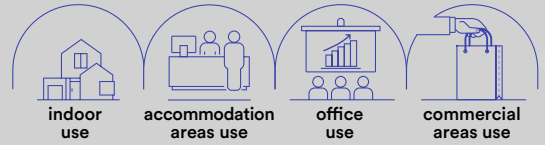

EASY DOMOTICA

Rotolo 20 metri strip led.
Roll 20 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton
senza silicone

Temperatura colore
3000K / 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone

Colour temperature
3000K / 4000K

Driver
DC24V
constant voltage
not included

Life time and on/off
50.000h
>25.000 on/off

STRIP24V-R20-COB-480C

8031414925636

lumen/m

colour temp.



1650 lm

STRIP24V-R20-COB-480M

8031414925643



lumen/m




1725 lm

light source	COB 480
watt/m	15W
led/m	480

Fotometria del prodotto / Photometric curve

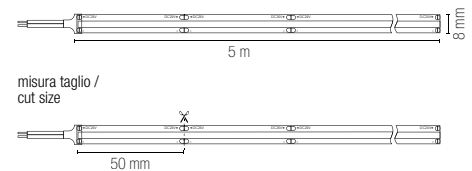


Recommended Profiles p. 336 to p. 397

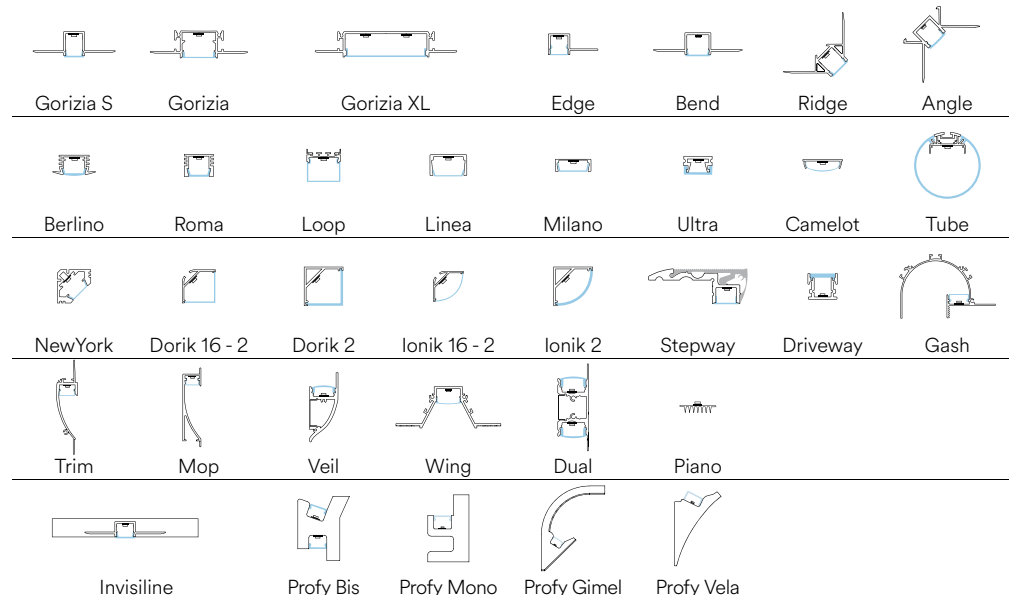

PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

STRIP24V 2835 HL 128



EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton
senza silicone

Temperatura colore
3000K / 4000K / 6500K



Driver
DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature
3000K / 4000K / 6500K



Driver
DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

STRIP24V-2835-HL-128C

8031414925650

lumen/m

total lumen

2000 lm
10000 lm

STRIP24V-2835-HL-128M

8031414925667

lumen/m

total lumen

2100 lm
10500 lm

STRIP24V-2835-HL-128F

8031414925674

lumen/m

total lumen

2050 lm
10250 lm

light source

watt/m

led/m

colour
temp.



2000 lm
10000 lm



2100 lm
10500 lm





2050 lm
10250 lm

SMD 2835


10W

128

Fotometria del prodotto / Photometric curve

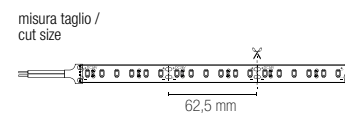

Recommended Profiles p. 336 to p. 397

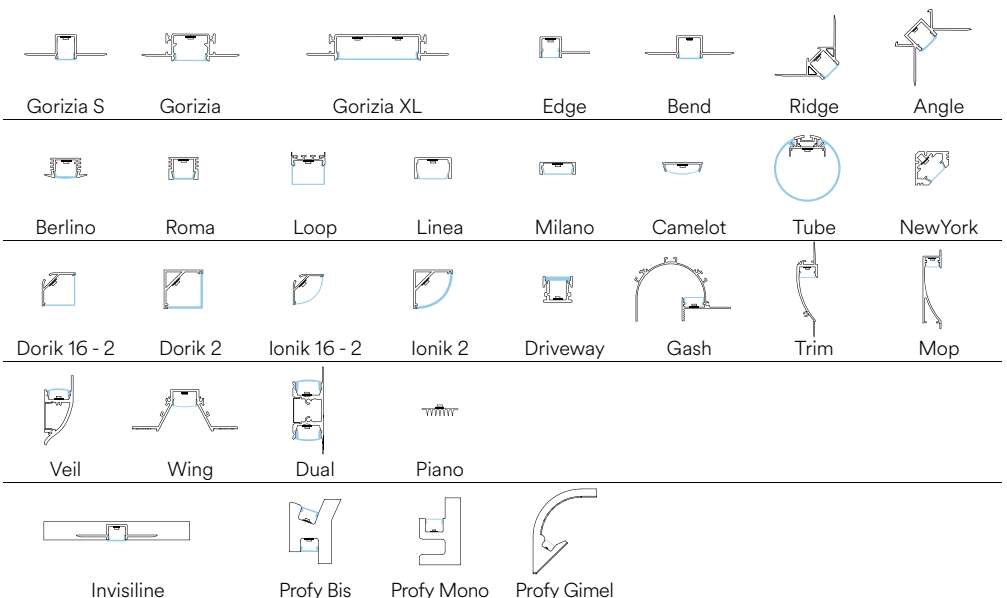

STRIP24V FOOD



EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton con
rivestimento
in silicone

Temperatura colore
2000K / 2600K / 5400K



Driver
DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material
kapton
with silicone
cover

Colour temperature
2000K / 2600K / 5400K



Driver
DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

Illuminazione per generi alimentari /
Food lighting



STRIP24V-2835-120MT

8031414925681

lumen/m

total lumen

colour
temp.



1800 lm

9000 lm

STRIP24V-2835-120BR

8031414925704

lumen/m

total lumen



1980 lm

9450 lm

STRIP24V-2835-120FS

8031414925698

lumen/m

total lumen



1980 lm

9900 lm

light source

SMD 2835


watt/m

18W


led/m

120


Fotometria del prodotto / Photometric curve



misura taglio /
cut size




Recommended Profiles p. 336 to p. 397

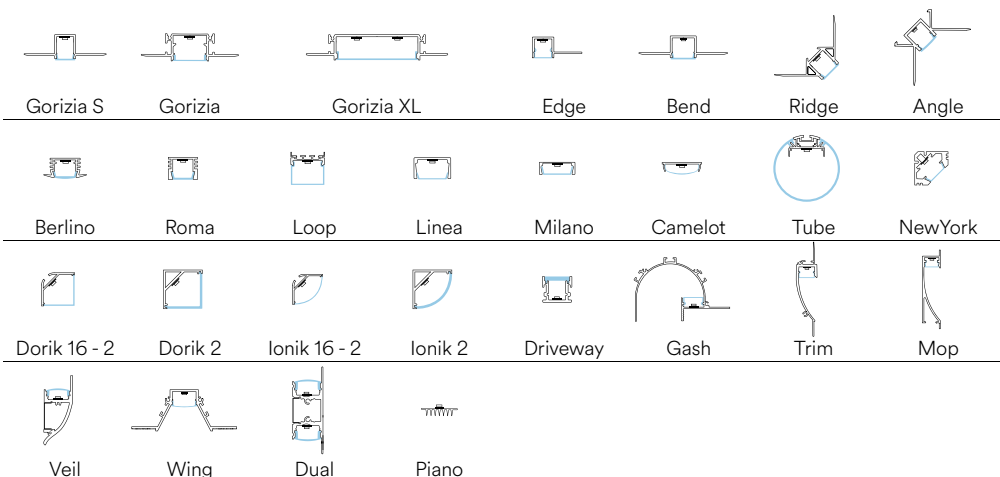

PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

STRIP24V COB



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton
senza silicone

Temperatura colore

3000K / 4000K / 6000K



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature

3000K / 4000K / 6000K



Driver

DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

STRIP24V-COB-480C

8031414881697

lumen/m

total lumen

colour
temp.



1538 lm

7690 lm

STRIP24V-COB-480M

8031414883516

lumen/m

total lumen



1700 lm

8500 lm

STRIP24V-COB-480F

8031414881703

lumen/m

total lumen



1698 lm

8490 lm



light source

LED COB 480


watt/m

16W

Fotometria del prodotto / Photometric curve

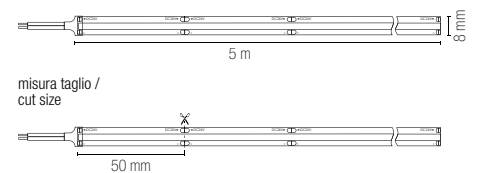

Recommended Profiles p. 336 to p. 397

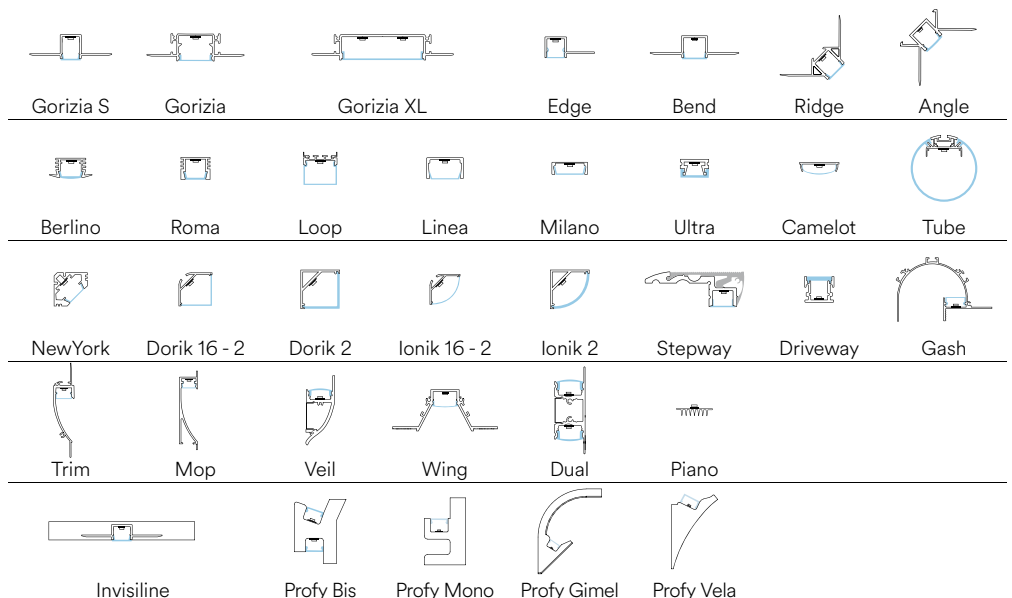

STRIP24V COB IP67



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton
con silicone

Temperatura colore
3000K / 4000K / 6000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton
with silicone



Colour temperature
3000K / 4000K / 6000K

Driver
DC24V
constant voltage
not included


Life time and on/off
50.000h
>25.000 on/off

	colour temp.
STRIP24V-COB-IP67-480C 8031414881710 lumen/m total lumen	1538 lm 7690 lm
STRIP24V-COB-IP67-480M 8031414881727 lumen/m total lumen	1700 lm 8500 lm
STRIP24V-COB-IP67-480F 8031414881734 lumen/m total lumen	1698 lm 8490 lm
light source	LED COB 480
watt/m	16W

Fotometria del prodotto / Photometric curve

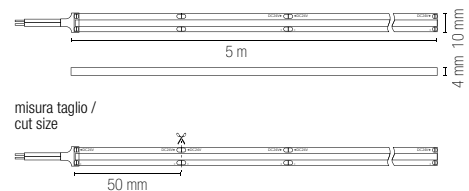


Recommended Profiles p. 336 to p. 397

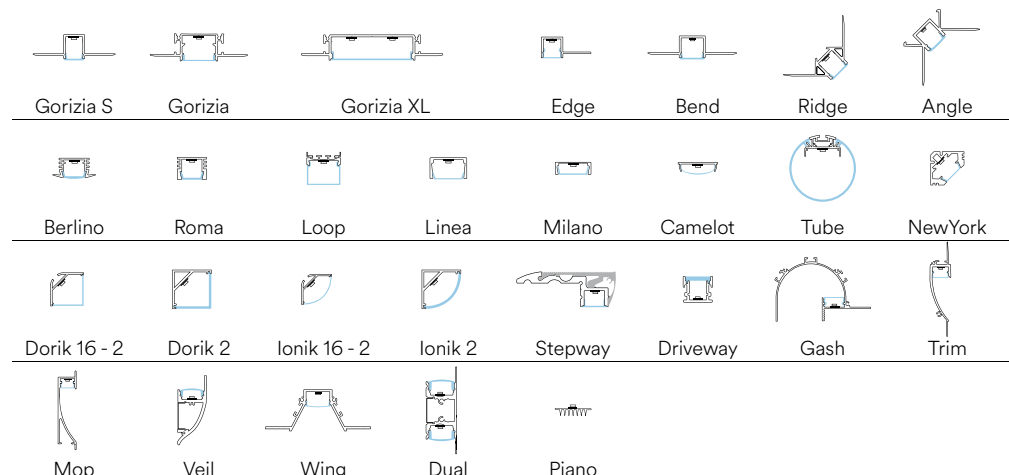

In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED

STRIP24V 2835 3D



EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K



Driver

DC24V
tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature
3000K / 4000K / 6000K



Driver

DC24V
constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

STRIP24V-2835-3D-60C

8031414878765

lumen/m

total lumen

STRIP24V-2835-3D-60M

8031414878727

lumen/m

total lumen

STRIP24V-2835-3D-60F

8031414878628

lumen/m

total lumen

colour
temp.



1542 lm

7710 lm



1480 lm

7400 lm



1542 lm

7710 lm

light source

SMD 2835





watt/m

14W


led/m

60


Fotometria del prodotto / Photometric curve

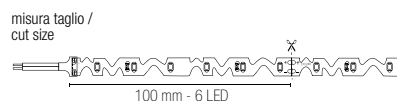

Recommended Profiles p. 336 to p. 397

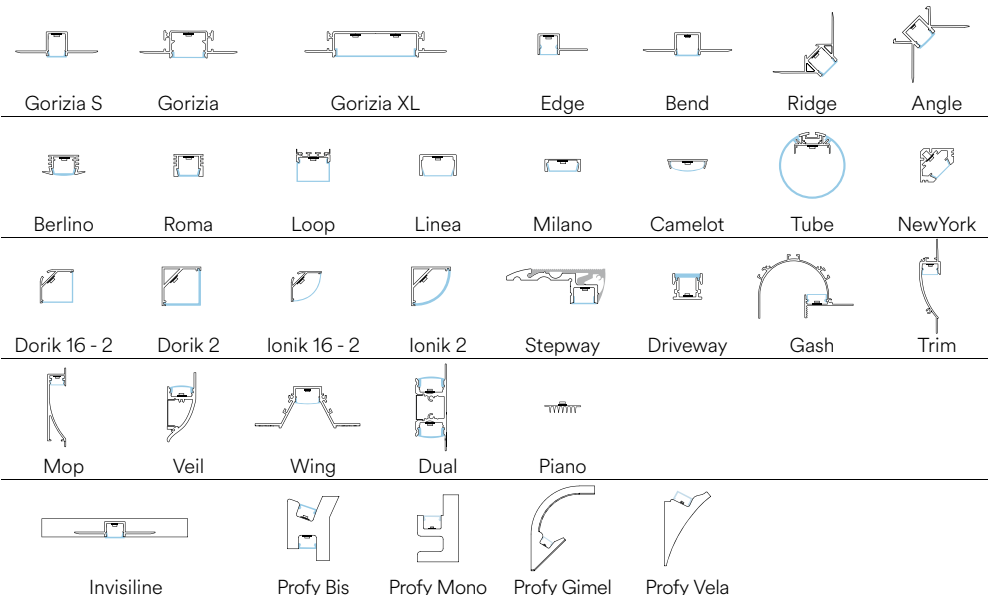

STRIP24V SLIM 120

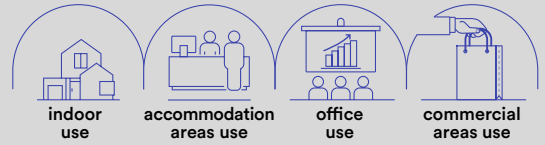

EASY DOMOTICA

Rotolo 5 metri strip led ultrasottile.
Roll 5 meters ultra-thin strip-led.



Driver p. 843-852
Controller p. 854-857



colour temp.

STRIP24V-SLIM-120C

8031414881741

lumen/m

total lumen



1896 lm

9480 lm

STRIP24V-SLIM-120M

8031414881758

lumen/m

total lumen



1838 lm

9190 lm

STRIP24V-SLIM-120F

8031414881765

lumen/m

total lumen



1766 lm

8830 lm

light source

SMD 2835

watt/m

16W

led/m

120

Materiale

kapton
senza silicone

Temperatura colore

3000K / 4000K / 6000K



Driver

DC24V

tensione costante
non incluso

Durata e on/off

25.000h


>15.000 on/off

Material

kapton
without silicone

Colour temperature

3000K / 4000K / 6000K



Driver

DC24V


constant voltage
not included

Life time and on/off

25.000h

>15.000 on/off


Fotometria del prodotto / Photometric curve



misura taglio /
cut size




Recommended Profiles p. 336 to p. 397

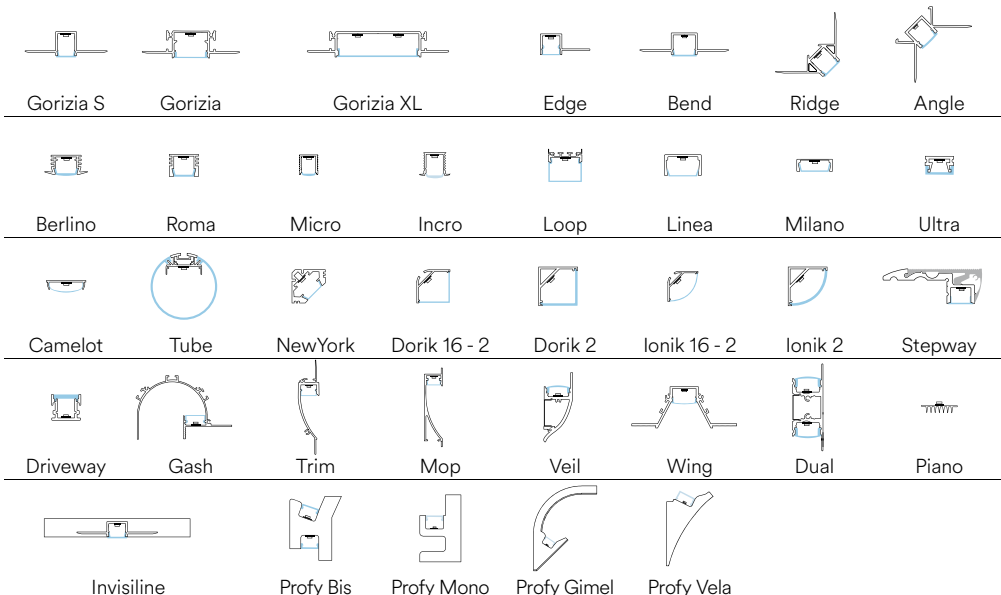

PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

STRIP24V 2835 60

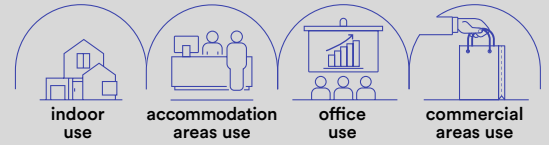

EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton
senza silicone

Temperatura colore
3000K / 4000K / 6000K



Driver
DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature
3000K / 4000K / 6000K



Driver
DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

STRIP24V-2835-60C

8031414871278

lumen/m

total lumen

colour
temp.



1542 lm

7710 lm

STRIP24V-2835-60M

8031414871285

lumen/m

total lumen



1480 lm

7400 lm

STRIP24V-2835-60F

8031414871292

lumen/m

total lumen



1542 lm

7710 lm

light source

SMD 2835



watt/m

14W


led/m

60


Fotometria del prodotto / Photometric curve



misura taglio /
cut size



Recommended Profiles p. 336 to p. 397

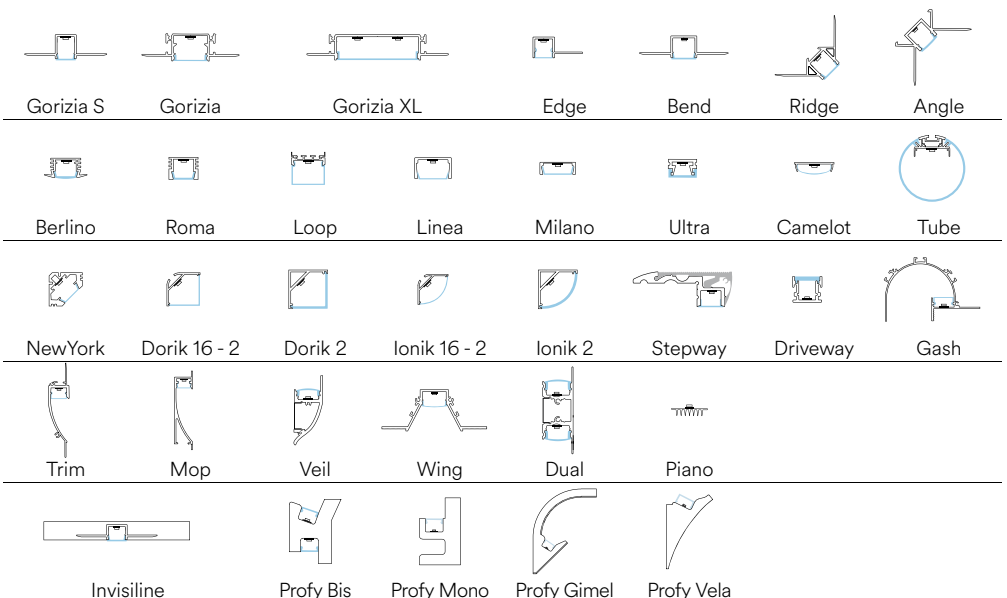

STRIP24V 2835 60 IP67



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton con rivestimento in silicone

Temperatura colore

3000K / 4000K / 6000K



Driver

DC24V

tensione costante non incluso

Durata e on/off

50.000h

>25.000 on/off

Material

kapton with silicone cover

Colour temperature

3000K / 4000K / 6000K



Driver

DC24V

constant voltage not included

Life time and on/off

50.000h

>25.000 on/off

colour temp.

STRIP24V-2835IP67-60C

8031414871308

lumen/m

total lumen



1542 lm

7710 lm

STRIP24V-2835IP67-60M

8031414871315

lumen/m

total lumen



1480 lm

7400 lm

STRIP24V-2835IP67-60F

8031414871322

lumen/m

total lumen



1542 lm

7710 lm

light source

SMD 2835



watt/m

14W


led/m

60

Fotometria del prodotto / Photometric curve

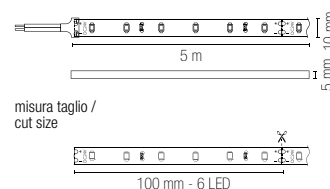


Recommended Profiles p. 336 to p. 397

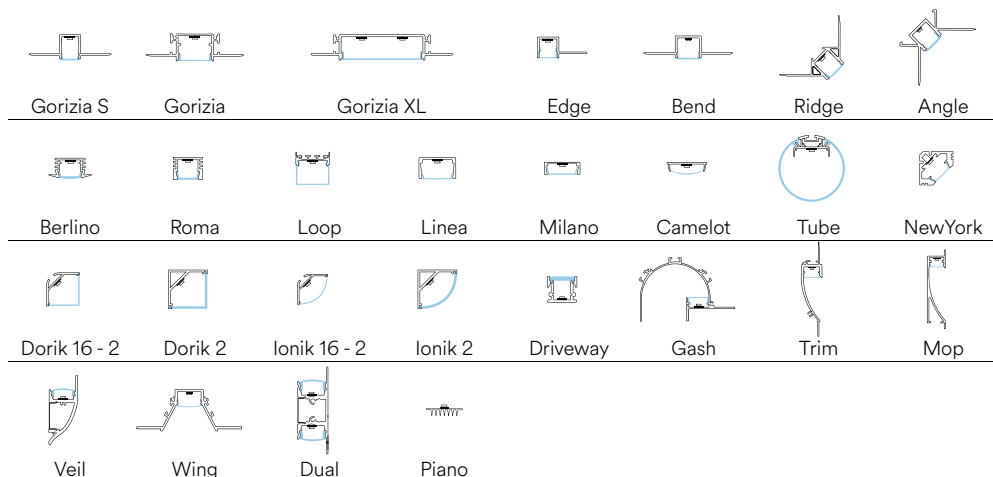

PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

STRIP24V 2835 120



Per una corretta dissipazione applicare la strip su un supporto d'alluminio / For correct dissipation fix the strip on aluminium support

EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857




Materiale

kapton
senza silicone

Temperatura colore

3000K/4000K/6000K/BLU



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature

3000K/4000K/6000K/BLU



Driver

DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

STRIP24V-2835-120C

8031414871056

lumen/m

total lumen

colour
temp.



2342 lm

11710 lm

STRIP24V-2835-120M

8031414871063

lumen/m

total lumen



2280 lm

11400 lm

STRIP24V-2835-120F

8031414871032

lumen/m

total lumen



2258 lm

11290 lm

STRIP24V-2835-120BLU

8031414871049

lumen

light source

watt/m

led/m




BLU

SMD 2835


22W

120


Fotometria del prodotto / Photometric curve



misura taglio /
cut size



Recommended Profiles p. 336 to p. 397

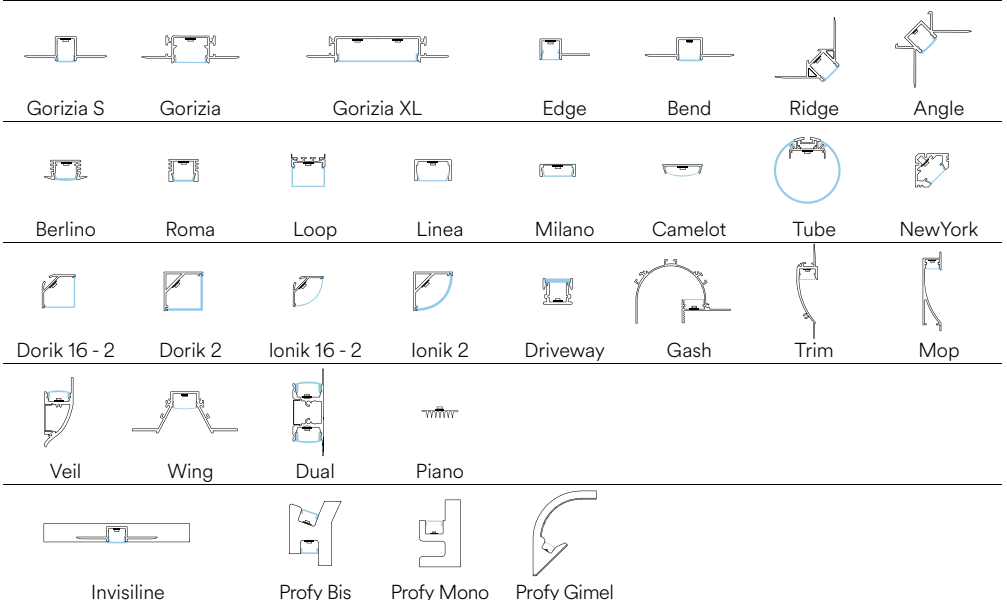

STRIP24V 2835 120 IP68



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



colour temp.



STRIP24V-2835IP68-120F

8031414881772

lumen/m

total lumen

2258 lm

11290 lm

light source	LED COB 120
watt/m	18W
led/m	120

Materiale

kapton
con silicone

Temperatura colore

6000K



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h

>25.000 on/off

Material

kapton
with silicone

Colour temperature

6000K



Driver

DC24V



constant voltage
not included

Life time and on/off

50.000h

>25.000 on/off


Fotometria del prodotto / Photometric curve



misura taglio /
cut size




Recommended Profiles p. 336 to p. 397

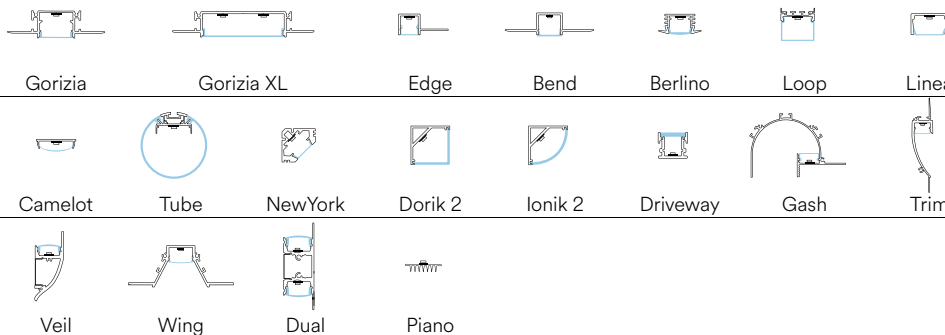

PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

STRIP24V 2835 CCT

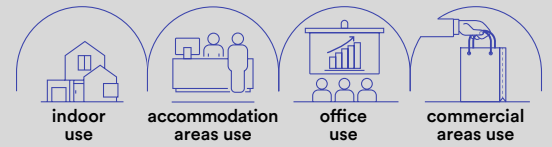

EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



colour temp.

STRIP24V-2835-CCT

8031414875795

lumen/m

total lumen



2652 lm

13260 lm

Materiale

kapton
senza silicone

Temperatura colore

CCT



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h

>25.000 on/off

Material

kapton
without silicone

Colour temperature

CCT



Driver

DC24V



constant voltage
not included

Life time and on/off

50.000h

>25.000 on/off


Fotometria del prodotto / Photometric curve




misura taglio /
cut size



Recommended Profiles p. 336 to p. 397

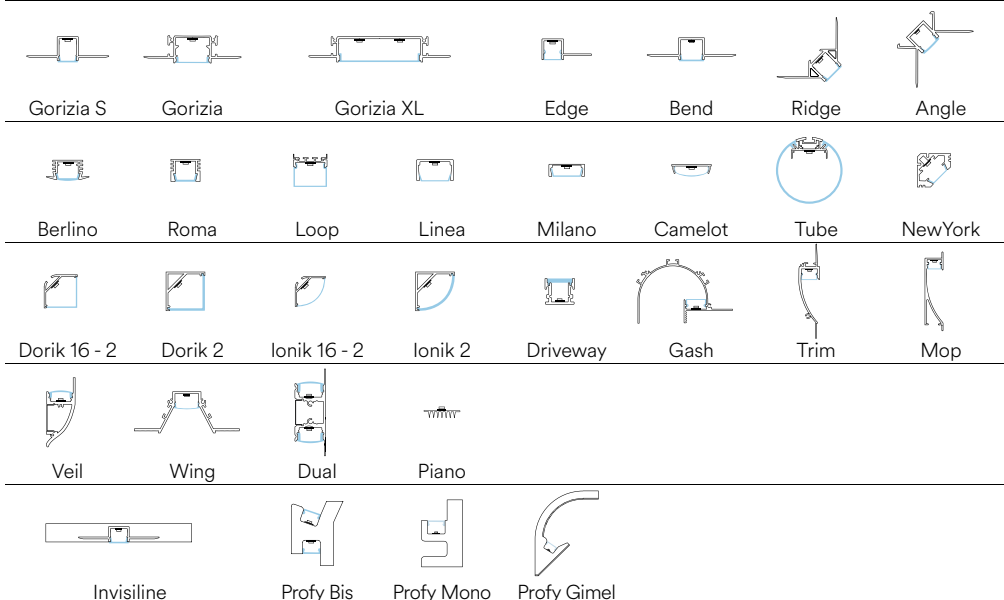

STRIP24V 2835 240

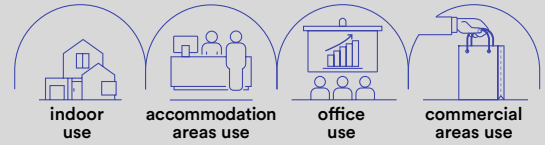

Per una corretta dissipazione applicare la strip su un supporto d'alluminio / For correct dissipation fix the strip on aluminium support

EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



colour
temp.

STRIP24V-2835-240C

8031414871018

lumen/m

total lumen



2706 lm

13530 lm

STRIP24V-2835-240M

8031414871025

lumen/m

total lumen



2640 lm

13200 lm

STRIP24V-2835-240F

8031414871001

lumen/m

total lumen



2526 lm

12630 lm

light source

SMD 2835

watt/m

26W

led/m

240

Materiale

kapton
senza silicone

Temperatura colore

3000K / 4000K / 6000K



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h

>25.000 on/off

Material

kapton
without silicone

Colour temperature

3000K / 4000K / 6000K



Driver

DC24V



constant voltage
not included

Life time and on/off


50.000h

>25.000 on/off

Fotometria del prodotto / Photometric curve




Recommended Profiles p. 336 to p. 397

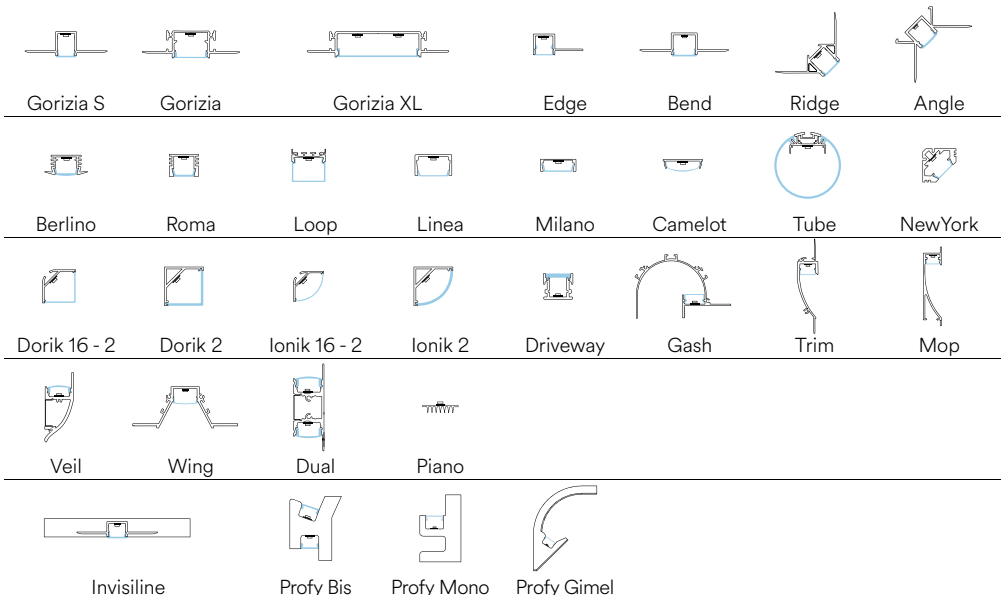

PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

STRIP24V 5050 60

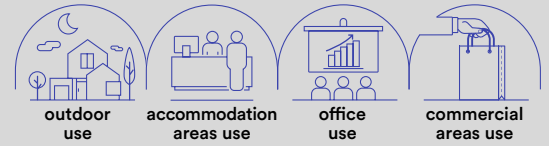

EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton
senza silicone

Temperatura colore

3000K / 4000K / 6000K



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature

3000K / 4000K / 6000K



Driver

DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

STRIP24V-5050-60C

8031414878420

lumen/m

total lumen

colour
temp.



1390 lm

6950 lm

STRIP24V-5050-60M

8031414878741

lumen/m

total lumen



1430 lm

7150 lm

STRIP24V-5050-60F

8031414876129

lumen/m

total lumen



1314 lm

6570 lm

light source

SMD 5050




watt/m

14W


led/m

60

Fotometria del prodotto / Photometric curve

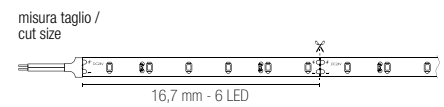

Recommended Profiles p. 336 to p. 397

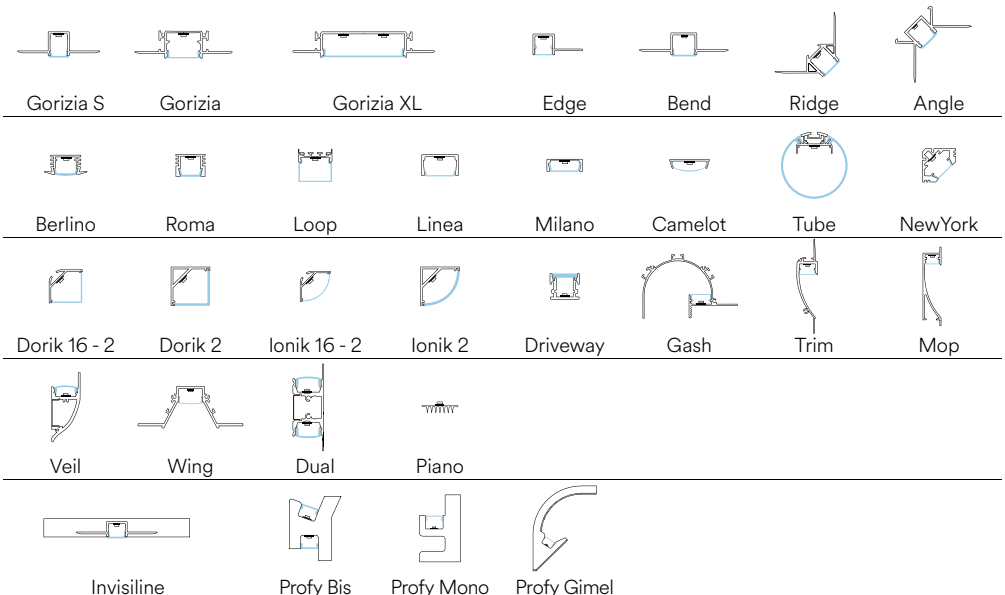

STRIP24V 5050 60 IP67



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton con rivestimento in silicone

Temperatura colore
3000K / 4000K / 6000K



Driver
DC24V
tensione costante non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
kapton with silicone cover

Colour temperature
3000K / 4000K / 6000K



Driver
DC24V
constant voltage not included

Life time and on/off
50.000h
>25.000 on/off

colour temp.

STRIP24V-5050IP67-60C

8031414876143

lumen/m

total lumen



1390 lm

6950 lm

STRIP24V-5050IP67-60M

8031414876150

lumen/m

total lumen



1430 lm

7150 lm

STRIP24V-5050IP67-60F

8031414876174

lumen/m

total lumen



1314 lm

6570 lm

light source

SMD 5050



watt/m

14W


led/m

60


Fotometria del prodotto / Photometric curve



misura taglio / cut size




Recommended Profiles p. 336 to p. 397

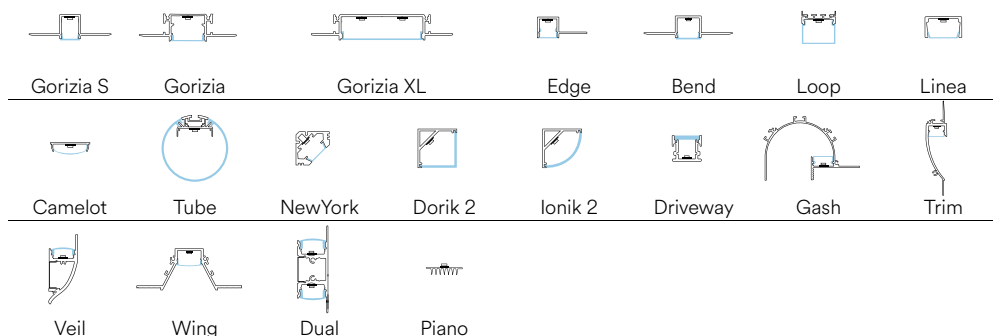

PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

STRIP24V 5050 RGB



EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton
senza silicone

Temperatura colore

RGB



Driver
DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature

RGB



Driver
DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

STRIP24V-5050-RGB
8031414871360



colour
temp.




RGB

light source	SMD 5050
watt/m	14,4W
led/m	60

Fotometria del prodotto / Photometric curve

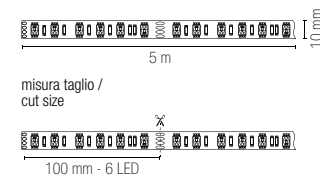

Recommended Profiles p. 336 to p. 397

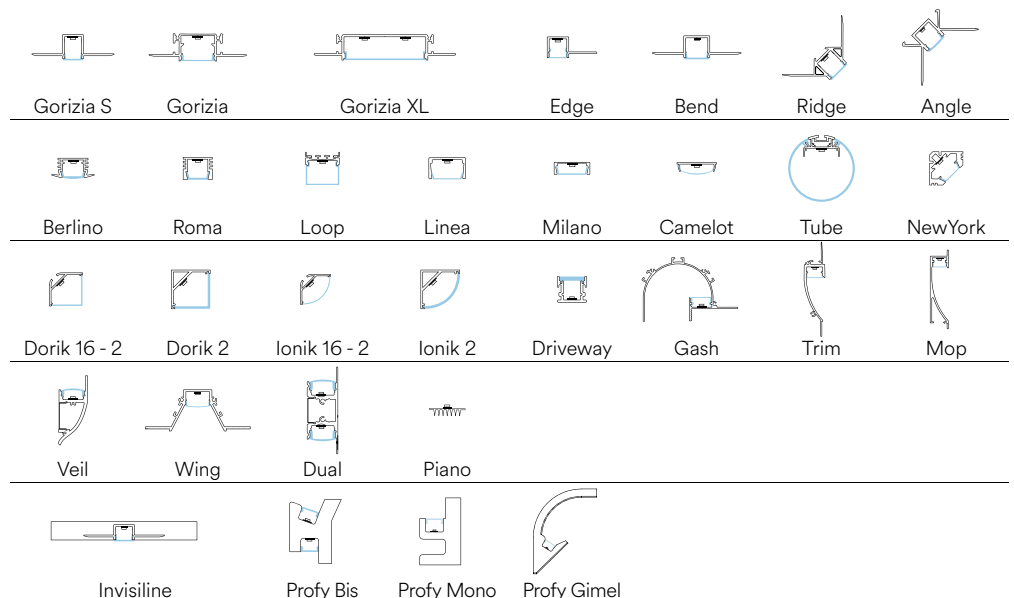

STRIP24V 5050 RGB IP67



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton con rivestimento in silicone

Temperatura colore

RGB



Driver

DC24V

tensione costante non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton with silicone cover

Colour temperature

RGB



Driver

DC24V

constant voltage not included

Life time and on/off

50.000h
>25.000 on/off

colour temp.





RGB


STRIP24V-5050RGB-IP67
8031414871377

light source	SMD 5050
watt/m	14,4W
led/m	60

Fotometria del prodotto / Photometric curve

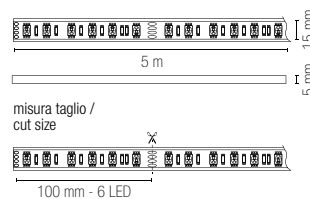


Recommended Profiles p. 336 to p. 397

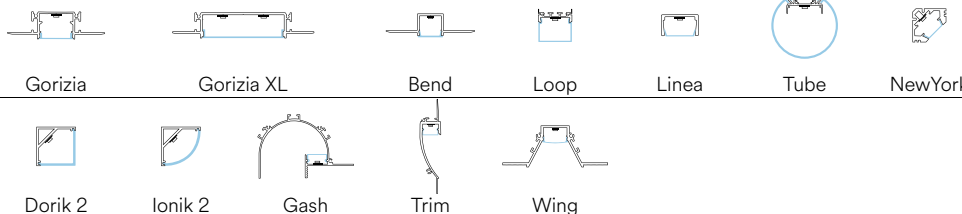

In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED

STRIP24V 5050 RGBW

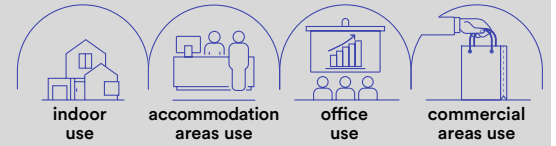

EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton
senza silicone

Temperatura colore

RGB + 4000K



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature

RGB + 4000K



Driver

DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

colour
temp.

STRIP24V-5050-RGBW

8031414871384

lumen/m

total lumen



RGB + 1080 lm

5400 lm

light source

SMD 5050


watt/m

19,2W


led/m

60


Fotometria del prodotto / Photometric curve



misura taglio /
cut size



Recommended Profiles p. 336 to p. 397

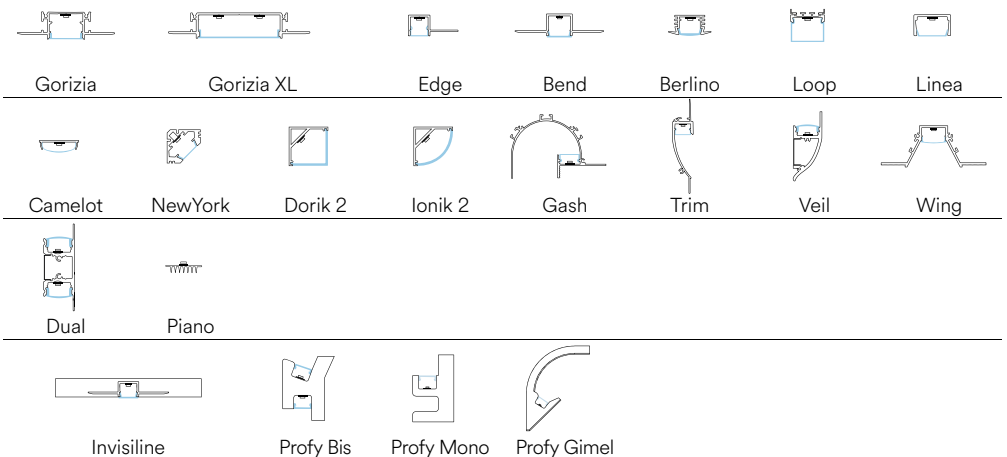

STRIP24V 5050 RGBW IP68



EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton con rivestimento in silicone

Temperatura colore

RGB + 4000K



Driver

DC24V

tensione costante non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton with silicone cover

Colour temperature

RGB + 4000K



Driver

DC24V

constant voltage not included

Life time and on/off

50.000h
>25.000 on/off

STRIP24V-5050RGBW-IP68

8031414871407

lumen/m

total lumen

colour temp.





RGB + 1080 lm


5400 lm

light source	SMD 5050
watt/m	19,2W
led/m	60

Fotometria del prodotto / Photometric curve

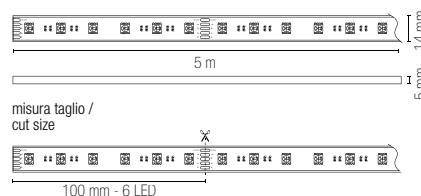


Recommended Profiles p. 336 to p. 397

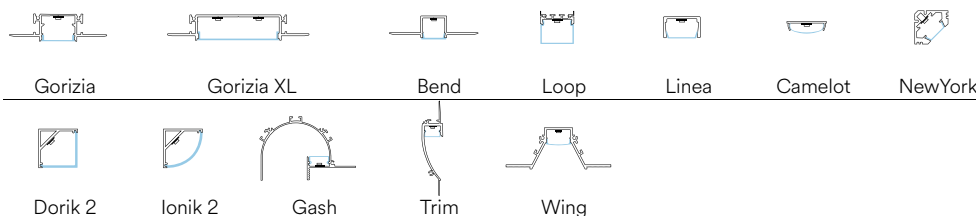

In.tec light PROFILI E STRIP LED / PROFILES AND STRIP LED

STRIP230V SMD



Rotolo 20 metri strip led.
Roll 20 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton con rivestimento in silicone

Temperatura colore
3000K / 4000K / 6500K



Driver

220V DC incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton with silicone cover

Colour temperature
3000K / 4000K / 6500K




Driver

220V DC included

Life time and on/off

50.000h
>25.000 on/off

	colour temp.		colour temp.
STRIP220V-2835-8C 8031414926930 lumen/m	800 lm	STRIP220V-2835-15C 8031414927005 lumen/m	1700 lm
STRIP220V-2835-8M 8031414926947 lumen/m	800 lm	STRIP220V-2835-15M 8031414927005 lumen/m	1700 lm
STRIP220V-2835-8F 8031414926954 lumen/m	800 lm	STRIP220V-2835-15F 8031414927029 lumen/m	1700 lm
light source	LED SMD 2835	light source	LED SMD 2835
watt/m	8W	watt/m	15W
led/m	120	led/m	120

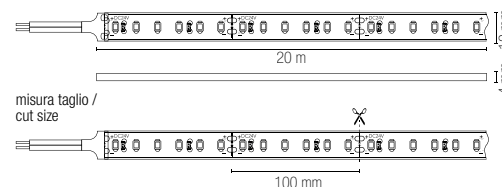

Accessori non inclusi / Not included accessories



STRIP220V-8-L-CONN

8031414926992

Connettore a L / L connector

STRIP220V-10-L-CONN

8031414927067

Connettore a L / L connector



STRIP220V-8-FLEX

8031414926978

Connettore flessibile, cavo 20 cm / Flexible connector, 20 cm cable

STRIP220V-10-FLEX

8031414927043

Connettore flessibile, cavo 20 cm / Flexible connector, 20 cm cable



STRIP220V-8-NEST

8031414926961

Innesto con cavo 20 cm / Nest with 20 cm cable

STRIP220V-10-NEST

8031414927036

Innesto con cavo 20 cm / Nest with 20 cm cable



STRIP220V-8-CAPS

8031414927210

Kit 3 pezzi tappi di chiusura / 3 pcs kit strip light end cap

STRIP220V-10-CAPS

8031414927227

Kit 3 pezzi tappi di chiusura / 3 pcs kit strip light end cap



STRIP220V-8-CONN

8031414926985


Connettori lineari / Linear connector

STRIP220V-10-CONN

8031414927067

Connettori lineari / Linear connector

STRIP230V COB

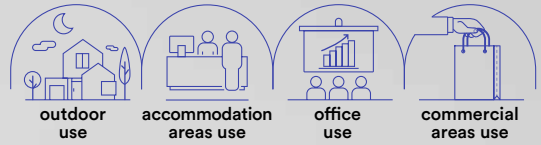

Rotolo 20 metri strip led.
Roll 20 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton con
rivestimento
in silicone

Temperatura colore
3000K / 4000K / 6500K



Driver

220V DC incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
with silicone
cover

Colour temperature
3000K / 4000K / 6500K



Driver

220V DC included

Life time and on/off

50.000h
>25.000 on/off

STRIP220V-COB-12C

8031414927074

lumen/m

colour
temp.



920 lm

STRIP220V-COB-12M

8031414927081

lumen/m



920 lm

STRIP220V-COB-12F

8031414927098

lumen/m



920 lm

light source


LED COB

watt/m

12W

led/m

260

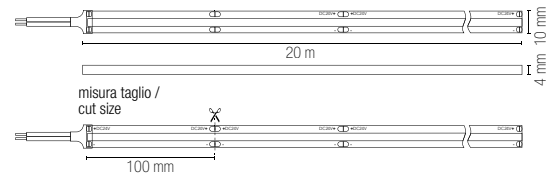

**Accessori non inclusi /
Not included accessories**



STRIP220V-12-L-CONN

8031414927111

Connettore a L /
L connector



STRIP220V-12-CONN

8031414927104

Connettore a I /
I connector



STRIP220V-12-NEST

8031414927135

Innesto con cavo 20 cm /
Nest with 20 cm cable



STRIP220V-12-CAPS

8031414927234

Kit 3 pezzi tappi di chiusura /
3 pcs kit strip light end cap




STRIP220V-12-ST

8031414927128

Kit 10 pcs staffette per fissaggio /
Strip 220 10 pcs fixyng bracket

STRIP24V 5050 3D RGBW



EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton
senza silicone

Temperatura colore

RGB



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature

RGB



Driver

DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

colour
temp.



RGB + 264 lm


STRIP24V-5050-3D-RGBW

8031414878819


lumen/m

light source	SMD 5050
watt/m	10W
led/m	48


Fotometria del prodotto / Photometric curve

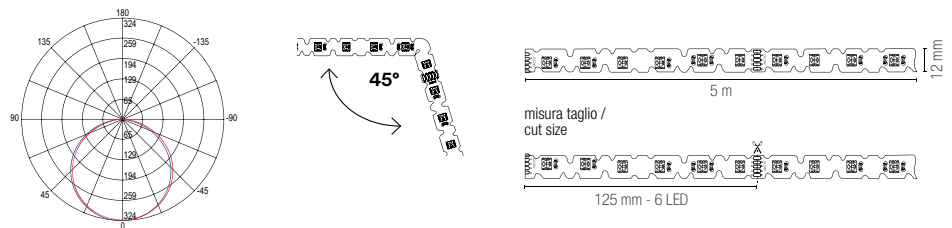

Recommended Profiles p. 336 to p. 397

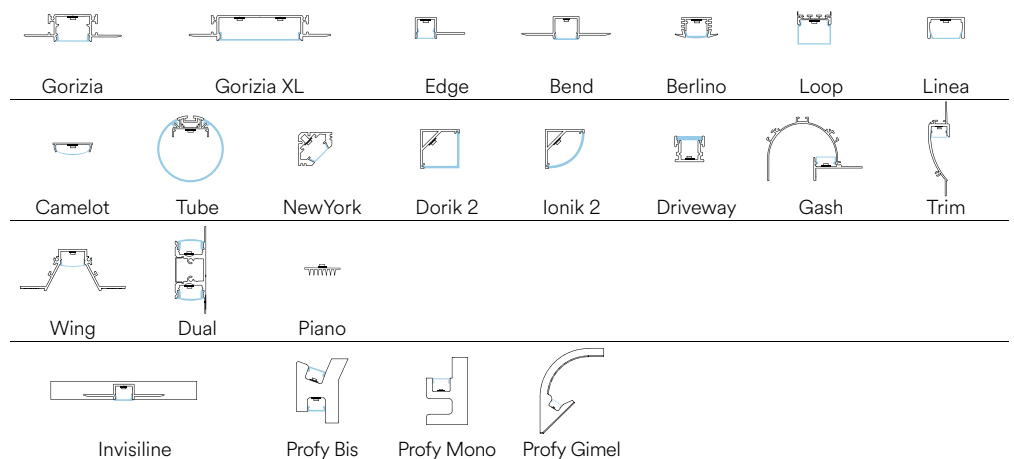

STRIP24V 5050 RGB CCT

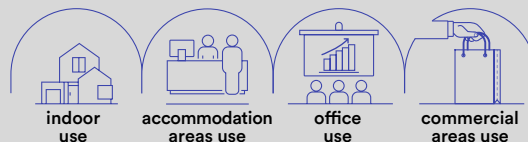

EASY
DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton
con silicone

Temperatura colore

RGB + CCT



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
with silicone

Colour temperature

RGB + CCT



Driver

DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

colour
temp.



STRIP24V-5050-RGBCCT
8031414871391

lumen/m

712 lm

total lumen

3560 lm

light source

SMD 5050



watt/m

19,2W


led/m

60

Fotometria del prodotto / Photometric curve

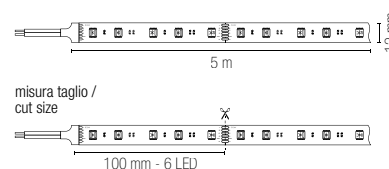


Recommended Profiles p. 336 to p. 397

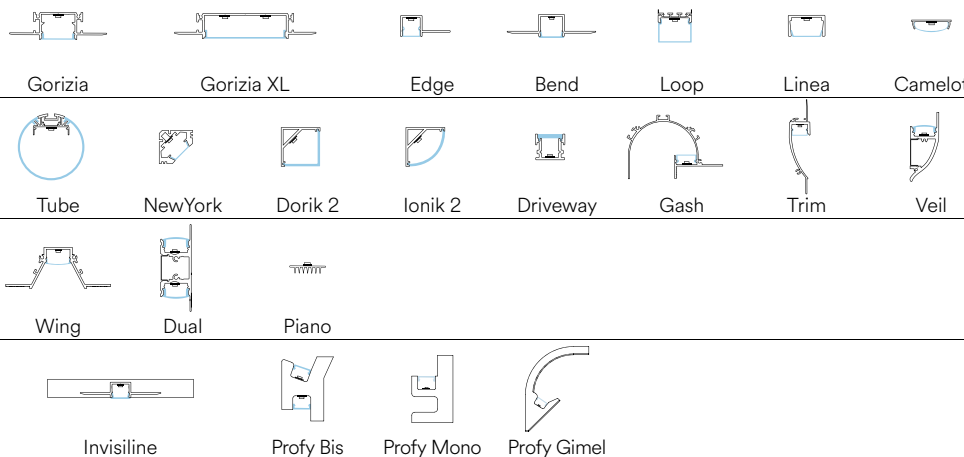

PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

STRIP24V 3838 168 RGB

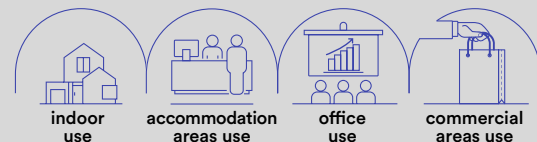

EASY DOMOTICA

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



colour temp.

STRIP24V-3838-168RGB
8031414877898



RGB

light source	SMD 3838
watt/m	24W
led/m	168

Materiale

kapton
senza silicone

Temperatura colore

RGB



Driver
DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

kapton
without silicone

Colour temperature

RGB






Driver
DC24V

constant voltage
not included


Life time and on/off

50.000h
>25.000 on/off

Fotometria del prodotto / Photometric curve

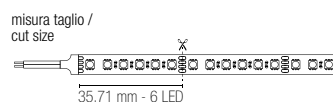


Recommended Profiles p. 336 to p. 397

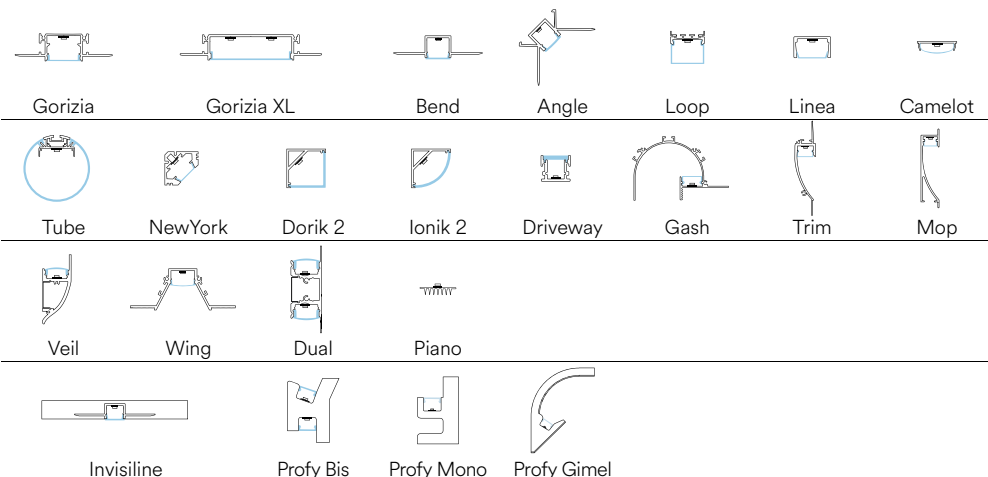



STRIP24V 5050 RGBW INT

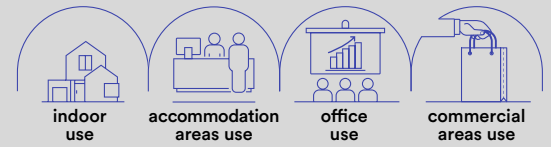

WI-FI
SMART INTEC

Kit strip LED Wi-Fi.
Kit strip LED Wi-Fi.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton
senza silicone

Temperatura colore

RGB + 4000K



Driver

12V DC
incluso

Durata e on/off

25.000h
>12.500 on/off

Material

kapton
without silicone

Colour temperature

RGB + 4000K



Driver

12V DC
included

Life time and on/off

25.000h
>12.500 on/off

colour
temp.

STRIP24V-5050RGBW-INT

8031414881796

lumen/m

total lumen



280 lm

540 lm

light source

SMD 5050


watt/m

12W



led/m

60

Accessori inclusi / Included accessories



Driver + Telecomando + accessori Wi-Fi /
Driver + Remote control + Wi-Fi accessories

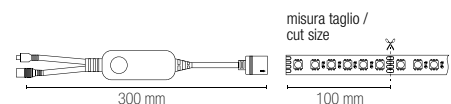

Control system easy installation




Smart
Intec
WIFI



ALEXA e
GOOGLE HOME
voice control

STRIP24V 2835 INT

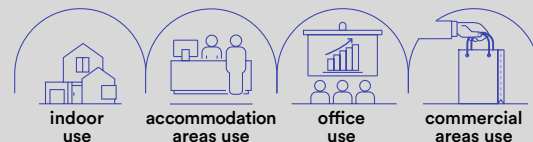

WI-FI
SMART INTEC

Kit strip LED Wi-Fi.
Kit strip LED Wi-Fi.



Driver p. 843-852
Controller p. 854-857



Materiale

kapton
senza silicone

Temperatura colore

3000K / 4000K



Driver

12V DC
incluso

Durata e on/off

25.000h
>12.500 on/off

Material

kapton
without silicone

Colour temperature

3000K / 4000K



Driver

12V DC
included

Life time and on/off

25.000h
>12.500 on/off

STRIP24V-2835C-INT

8031414882182

lumen/m

total lumen

colour
temp.



380 lm

760 lm

STRIP24V-2835M-INT

8031414881789

lumen/m

total lumen



380 lm

760 lm

light source

SMD 2835


watt/m

8W


led/m

60

Accessori inclusi / Included accessories



Driver + Telecomando + accessori Wi-Fi /
Diver + Remote control + Wi-Fi accessories

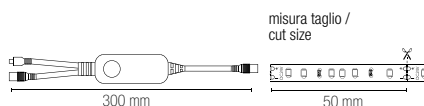

Control system easy installation



Smart
Intec
WIFI



ALEXA e
GOOGLE HOME
voice control

PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

INSIGN

Kit 20 pz moduli LED.
Kit 20 pcs LED module.



kit 20pz con cavo 10cm / kit 20pcs with cable 10cm

EASY
DOMOTICA



Driver p. 843-852
Controller p. 854-857



Materiale PC	Material PC
Temperatura colore 6000K 	Colour temperature 6000K
Driver DC12V tensione costante non incluso	Driver DC12V costant voltage not included
Durata e on/off 50.000h >25.000 on/off	Life time and on/off 50.000h >25.000 on/off

LED-INSIGN-F-LENS

8031414871155


lumen

colour
temp.




120 lm/m

sorgente luminosa / light source	LED SMD 5050
watt/m	20 x 1,2W
beam angle	160°



Kit 20 pz moduli LED.
Kit 20 pcs LED module.

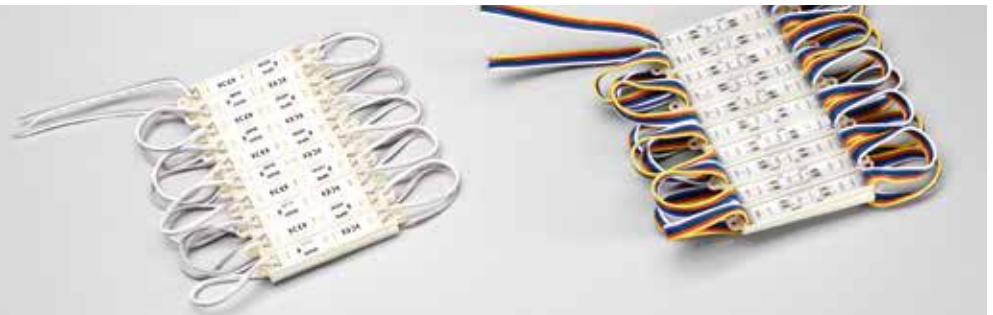

kit 20pz con cavo 10cm / kit 20pcs with cable 10cm

EASY
DOMOTICA



Driver p. 843-852
Controller p. 854-857



Materiale PC	Material PC
Temperatura colore RGB + 6000K 	Colour temperature RGB + 6000K
Driver DC12V tensione costante non incluso	Driver DC12V costant voltage not included
Durata e on/off 50.000h >25.000 on/off	Life time and on/off 50.000h >25.000 on/off

LED-INSIGN-F

8031414862979


lumen

colour
temp.



72 lm/m

light source	SMD 5050
watt/m	20 x 0,72W
beam angle	120°



LED-INSIGN-RGBW

8031414862955


lumen

colour
temp.



RGB + 72 lm/m

light source	SMD 5050
watt/m	20 x 0,96W
beam angle	120°

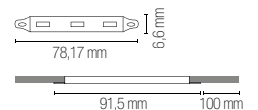

STRIP SURROUND

Strip LED comando touch con attacco USB.

LED strip light with switch touch control and USB connection.




Materiale
kapton con
rivestimento in silicone

Material
kapton with
silicone cover


Temperatura colore
RGB



Colour temperature
RGB

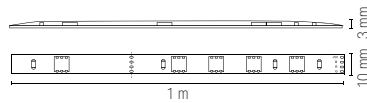

misura taglio /
cut size



STRIP-SURROUND
8031440354202

colour
temp.



RGB

light source	SMD 5050
watt/m	1,5W
led/m	15

Kit strip con telecomando e funzione RGB music color con attacco USB.

Kit strip with remote control and RGB music function with USB connection.




Materiale
kapton con
rivestimento in silicone

Material
kapton with
silicone cover



Temperatura colore
RGB



Colour temperature
RGB

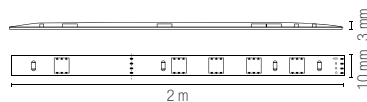

misura taglio /
cut size



STRIP-SURROUND-2M
8031414881802

colour
temp.



RGB

light source	SMD 5050
watt/m	3W
led/m	60

FLEX24V 10X10



EASY
DOMOTICA

Rotolo 5 metri striscia led ultraflessibile in silicone.
5 meters roll extra flexible led line in silicone.



Driver p. 843-852
Controller p. 854-857



Materiale
silicone

Temperatura colore
3000K / 4000K

Driver
DC24V
tensione costante
non incluso

Durata e on/off
50.000h
>25.000 on/off


Material
silicone

Colour temperature
3000K / 4000K

Driver
DC24V
constant voltage
not included

Life time and on/off
50.000h
>25.000 on/off

	colour temp.
FLEX24V-10X10-12C 8031414925711	
lumen/m	1140 lm
total lumen	5700 lm
FLEX24V-10X10-12M 8031414925728	
lumen/m	1200 lm
total lumen	6000 lm
light source	SMD 2835
watt/m	12W
led/m	120

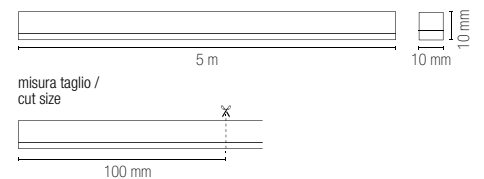

Accessori non inclusi / Not included accessories



FLEX24V-10X10-CAP
8031414925827

Kit 2 tappi in silicone /
Kit 2 pcs silicon caps



FLEX24V-10X10-ST
8031414925858

Kit 2 staffe /
Kit 2 pcs brackets

FLEX24V 6X6



EASY
DOMOTICA

Rotolo 5 metri striscia led ultraflessibile in silicone.
5 meters roll extra flexible led line in silicone.



Driver p. 843-852
Controller p. 854-857



Materiale
silicone

Temperatura colore

3000K / 4000K



Driver

DC24V

tensione costante
non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

silicone

Colour temperature

3000K / 4000K



Driver


DC24V

constant voltage
not included

Life time and on/off

50.000h
>25.000 on/off

	colour temp.
FLEX24V-6X6-5C 8031414925735	
lumen/m	456 lm
total lumen	2280 lm
FLEX24V-6X6-5M 8031414925742	
lumen/m	480 lm
total lumen	2400 lm
light source	SMD 2835
watt/m	4,8W
led/m	120

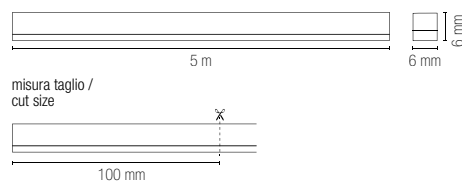

Accessori non inclusi / Not included accessories



FLEX24V-6X6-CAP
8031414925834

Kit 2 tappi in silicone /
Kit 2 pcs silicon caps



FLEX24V-6X6-ST
8031414925865

Kit 2 staffe /
Kit 2 pcs brackets

PROFILI E STRIP LED / PROFILES AND STRIP LED

In.tec light

FLEX24V 6X13



EASY
DOMOTICA

Rotolo 5 metri striscia led ultraflessibile in silicone.
5 meters roll extra flexible led line in silicone.



Driver p. 843-852
Controller p. 854-857



Materiale
silicone

Temperatura colore
3000K / 4000K
BLU/ROSSO/VERDE/ROSA/YELLOW

Driver
DC24V (8,3A)
tensione costante
non incluso

Durata e on/off
25.000h
>15.000 on/off

Material
silicone


Colour temperature
3000K / 4000K
BLUE/RED/GREEN/PINK/YELLOW

Driver
DC24V (8,3A)
costant voltage
not included

Durata e on/off
25.000h
>15.000 on/off

	colour temp.
FLEX24V-6X13-12C 8031414925759	
lumen/m	1140
total lumen	5700
FLEX24V-6X13-12M 8031414925766	
lumen/m	1200
total lumen	6000
light source	SMD 2835
watt/m	12W
led/m	120

	colour temp.
FLEX24V-6X13-12B 8031414925773	
lumen	blue
FLEX24V-6X13-12R 8031414925780	
lumen	red
FLEX24V-6X13-12G 8031414925797	
lumen	green
FLEX24V-6X13-12P 8031414925803	
lumen	pink
FLEX24V-6X13-12Y 8031414925810	
lumen	yellow
light source	SMD 2835
watt/m	12W
led/m	120

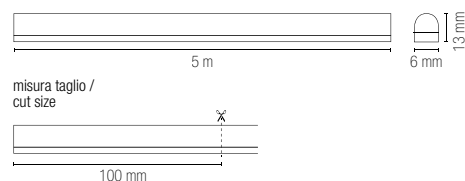

Accessori non inclusi / Not included accessories




FLEX24V-6X13-CAP
8031414925841


Kit 2 tappi in silicone /
Kit 2 pcs silicon caps



FLEX24V-6X13-ST
8031414925872

Kit 2 staffe /
Kit 2 pcs brackets

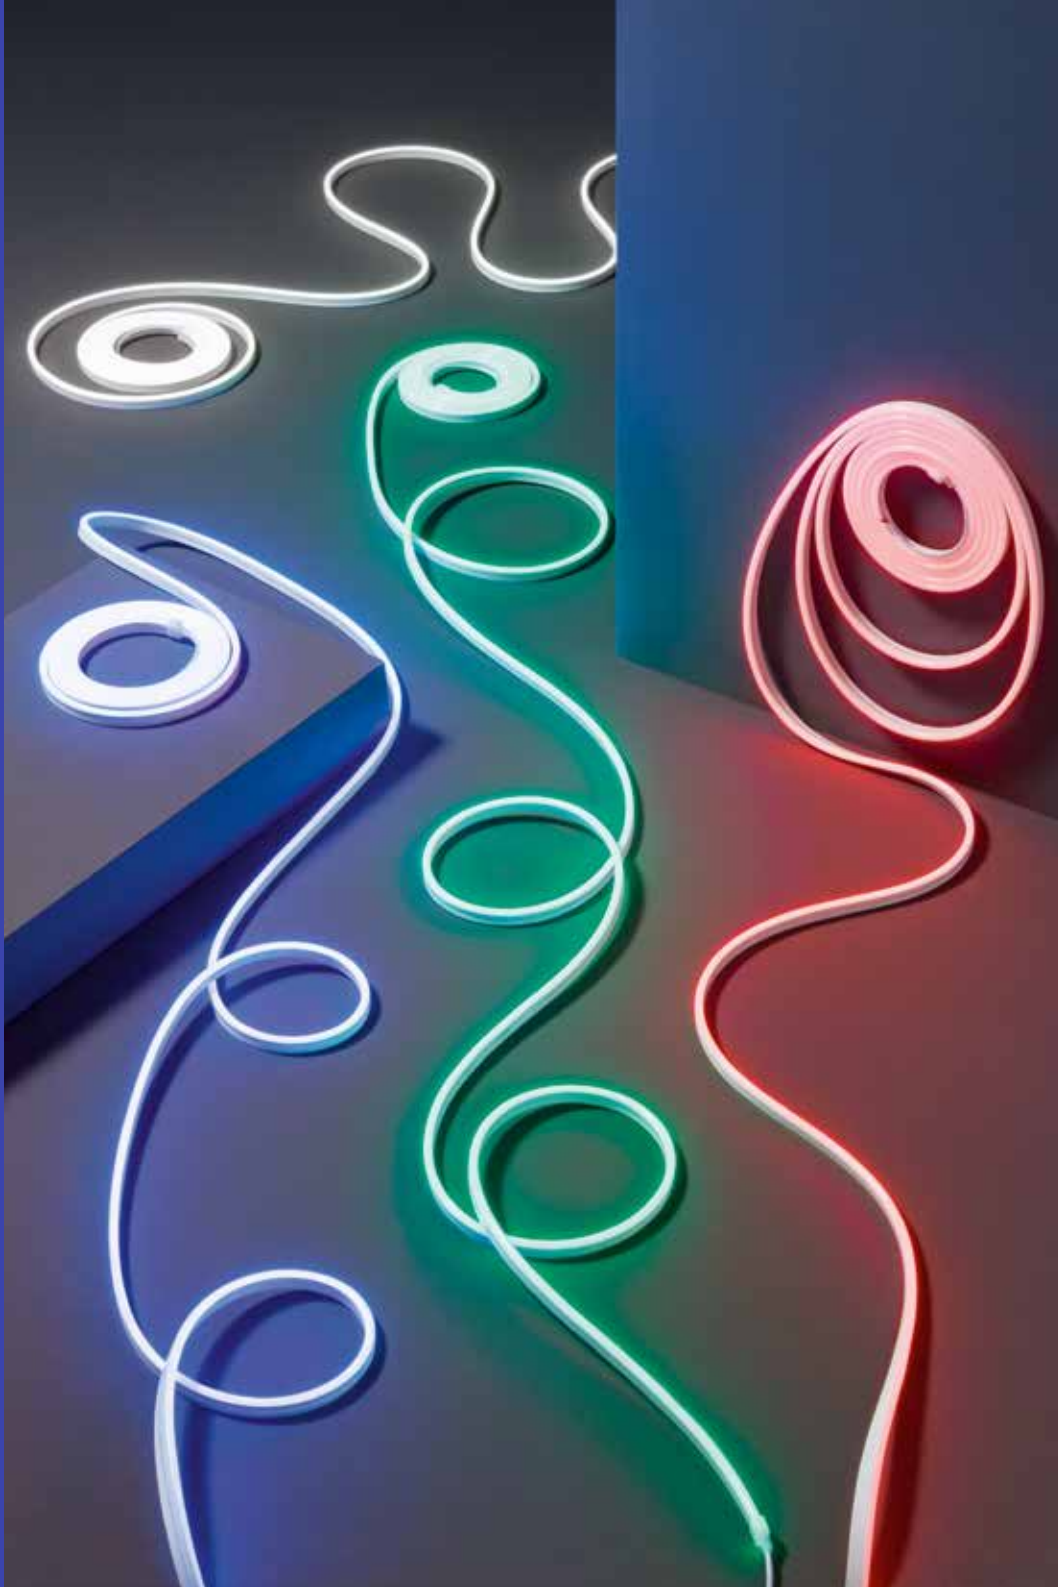

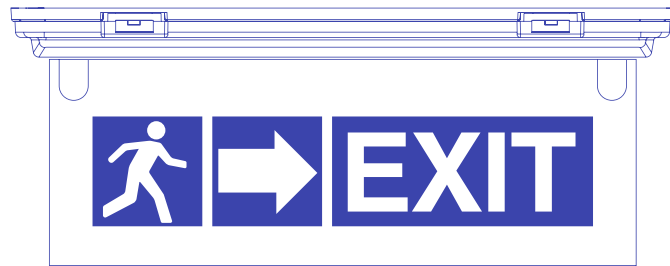

LAMPADE D'EMERGENZA
EMERGENCY LAMPS

HUBLLOT HELP

Plafoniera LED in policarbonato bianca con batteria Ni-Cd con durata fino a 12H e funzione d'emergenza combinata e permanente.

White polycarbonate LED ceiling light with Ni-Cd battery with 12H duration and emergency function maintain or non-maintain.




indoor
use



accommodation
areas use




office
use



commercial
areas use





Materiale

PC + PC

Colore

bianco



Temperatura colore

3000K / 4000K / 6500K



Driver

integrato

Material

PC + PC

Colour

white



Colour temperature

3000K / 4000K / 6500K



Driver

built-in



LED-HUBLOT-HELP

8031414920488

lumen

colour temp. | colour



1800 lm

emergency light

2W - 200 lm

watt


18W

beam angle

120°

pf

0.90




Ni-Cd 6V 1800 mAh

Batteria per emergenza inclusa /
Included emergency battery




Fotometria del prodotto / Photometric curve




LED-HUBLOT-HELP

**Funzione MAINTAIN sempre accesa /
MAINTAIN function always on**




**Funzione NON-MAINTAIN emergenza /
NON-MAINTAIN function only emergency**

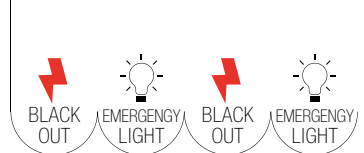

HELP INC

Incasso a LED emergenza in policarbonato bianco.
Emergency LED installation in white polycarbonate.




- Materiale**
policarbonato
- Colore**
bianco
- Temperatura colore**
4000K
- Driver**
incluso
- Material**
polycarbonate
- Colour**
white
- Colour temperature**
4000K
- Driver**
included



Angolo di luce per open space / Open space beam angle




	colour temp.	colour
INC-HELP-R37 8031414882786		
lumen	130 lm	
watt	1,2W	
beam angle	140°	
	Ø 32 mm	



LiFePO4 3.2V 1000mAh
Batteria per emergenza inclusa /
Included emergency battery



Fotometria del prodotto / Photometric curve




INC-HELP-R37

HELP TRACK

Lampade di emergenza LED per sistema binario trifase nei colori bianco o nero.

LED emergency lamps for three-phase rail system in white or black.

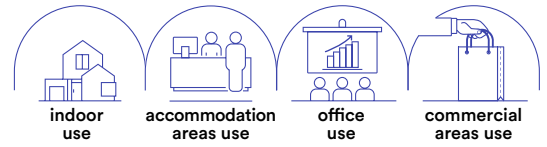

Materiale

polycarbonato

Colore

bianco
nero



Temperatura colore

4000K



Driver

incluso

Material

polycarbonate

Colour

white
black



Colour temperature

4000K




Driver

included



	colour temp.	colour
LED-HELP-W-TRACK 8031414884179		
lumen	250 lm	
LED-HELP-B-TRACK 8031414884162		
lumen	250 lm	

watt	2W
beam angle	140°

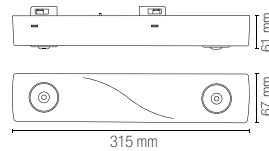

LiFePO4 3.2V 3200mAh
Batteria per emergenza inclusa /
Included emergency battery




LAMPADE D'EMERGENZA / EMERGENCY LAMPS

In.tec light

HELP EXIT

Lampada a LED di emergenza multiuso:
plafoniera, incasso ed incasso più bandiera.

Multipurpose emergency LED lamp:
ceiling lamps, recessed light and recessed with flag.



- Materiale**
PC
- Colore**
bianco
- Temperatura colore**
4000K
- Driver**
integrato
- Material**
PC
- Colour**
white
- Colour temperature**
4000K
- Driver**
built-in



LED-HELP-EXIT

8031414876310

lumen

colour temp. | colour

400 lm

emergency light

3 h - 400 lm

watt


4W

2 x 7.4V 1.8Ah Li-ion

Batteria per emergenza inclusa /
Included emergency battery



Incluso adesivi /
With stickers kit




Accessori / Accessories



HELP-EXIT-KIT

8031414876327

Kit incasso cornice e molle /
Kit recessed with frame and spring




HELP-EXIT-FLAG

8031414877331


Kit bandiera incluso adesivi /
Emergency flag with stickers kit



Funzione MAINTAIN
sempre accesa /
MAINTAIN
function always on




Funzione NON-MAINTAIN
emergenza /
NON-MAINTAIN function
only emergency



HELP 511

Lampada di emergenza LED in policarbonato con batteria Li-on, incasso con cassetta di derivazione 511.

Emergency LED lamp in PC with Li-on battery; fit with recess box 511.

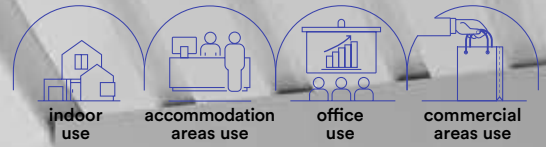

Materiale

policarbonato

Colore

bianco



Temperatura colore

4000K



Driver

integrato

Material

polycarbonate

Colour

white




Colour temperature

4000K



Driver

built-in



LED-HELP-511

8031414862566

lumen

colour temp.



80 lm

colour



emergency light

3 h - 180 lm

watt


4W

beam angle

100°



275 x 95 x 35 mm



Accessori inclusi / Included accessories

Scatola derivazione /
Recess box hole



Adesivo /
Stickers




Li-ion 7.4V 1200mA

Batteria per emergenza inclusa /
Included emergency battery



HELP 503




- Materiale**
polycarbonato
- Colore**
bianco
- Temperatura colore**
4000K
- Driver**
integrato
- Material**
polycarbonate
- Colour**
white
- Colour temperature**
4000K
- Driver**
built-in

Lampada di emergenza LED in polycarbonato con batteria Li-on incasso con cassetta di derivazione 503.


Emergency LED lamp in PC with Li-on battery; fit with recess box 503.



	colour temp.	colour
LED-HELP-503 8031414862573 lumen		
emergency light	3 h - 80 lm	
watt	1W	
beam angle	120°	
	90 × 55 × 31 mm	



scatola derivazione 503
503 junction box
non inclusa / not included



Li-ion 3,7V 700 mAh
Batteria per emergenza inclusa /
Included emergency battery





Materiale

polycarbonato
+ acciaio

Colore

bianco
nikel



Temperatura colore

4000K



Driver

integrato

Material

polycarbonate
+ stainless steel

Colour

white
nikel



Colour temperature

4000K



Driver


built-in

Incasto segnapassi in polycarbonato con alloggiamento in cassetta di derivazione 503 con placchetta intercambiabile bianco o nikel in alluminio per funzione di emergenza combinata e permanente.


Downlight in polycarbonate for recessed box 503 built-in-LED with replaceable in aluminum buckle white or nickel finish and double emergency function maintain or non-maintain.



	colour temp.	colour	Accessori inclusi / Included accessories
INC-BOLT-503HP 8031414866243 lumen			
emergency light	200 lm		2x placchette / frames
watt	3 h - 150 lm ^h		2x staffette / brackets
	3W		
	Ø 32 mm		




scatola derivazione 503
503 junction box
non inclusa / not included




Li-ion 3,7V 700 mAh
Batteria per emergenza inclusa /
Included emergency battery




Funzione MAINTAIN
sempre accesa /
MAINTAIN
function always on



Funzione NON-MAINTAIN
emergenza /
NON-MAINTAIN function
only emergency




OUTDOOR

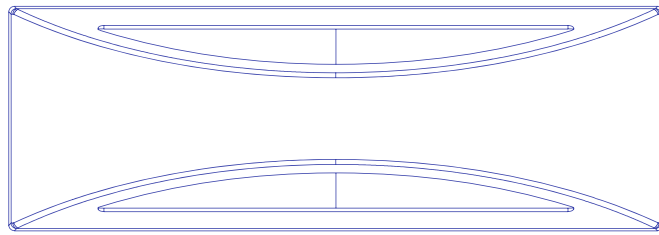

APPLIQUE
WALL LAMPS

COMPACT

Applique a LED in alluminio colore antracite con diffusore in policarbonato.
Anthracite aluminum LED wall lamp and PC diffuser.

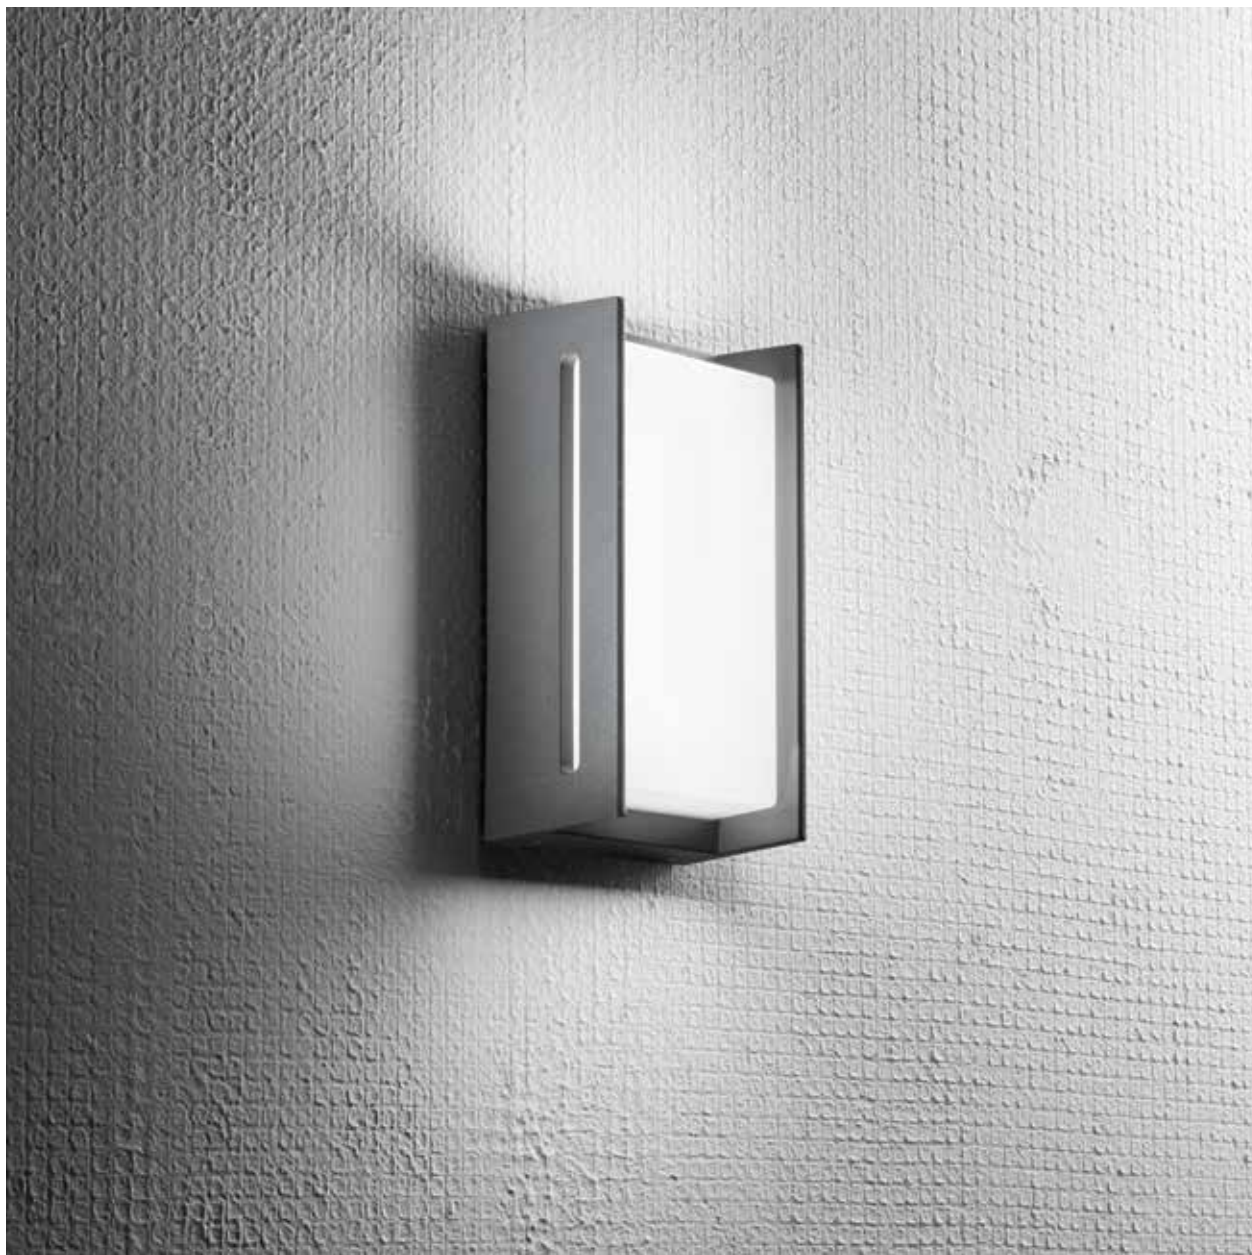

Materiale
alluminio +
policarbonato

Colore
antracite



**Temperatura colore
selezionabile**
3000K / 4000K



Driver
incluso

Material
aluminum +
polycarbonate

Colour
anthracite



**Selectable color
temperature**
3000K / 4000K



Driver
included




LED-W-COMPACT

8031414867110
lumen



watt	18W
beam angle	120°



DETROIT

Applique a LED in alluminio nero diffusore in policarbonato.
Aluminum LED wall lamp black finish with PC shade.



In.tec light **OUTDOOR APPLIQUE / WALL LAMPS**

Materiale

alluminio +
policarbonato

Colore

nero



**Temperatura colore
selezionabile**
3000K / 4000K



Driver
incluso

Material

aluminum +
polycarbonate

Colour

black



**Selectable color
temperature**
3000K / 4000K



Driver
included



LED-W-DETROIT-AP

8031414862290

lumen

colour
temp.



700 lm

colour




watt

10W

beam angle

120°

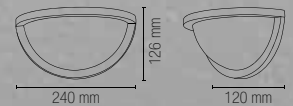

ZODIAC

Appliche a LED in policarbonato nei colori bianco e nero.
LED polycarbonate wall lamp in black and white.

Materiale

PC

Colore

bianco
nero



**Temperatura colore
selezionabile**

3000K / 4000K



Driver

integrato

Material

PC

Colour

white
black



**Selectable color
temperature**


3000K / 4000K



Driver

built-in



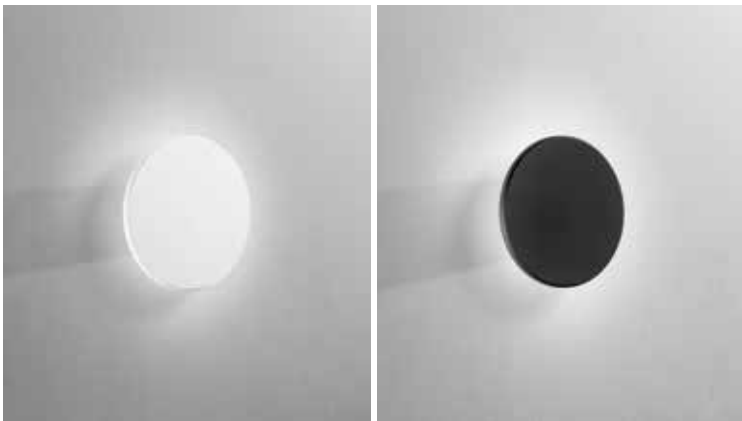

LED-W-ZODIAC-M-BCO

8031414889846


lumen

colour temp.



1550 lm

colour



LED-W-ZODIAC-M-NER

8031414889853

lumen



1550 lm




watt

12W

beam angle

360°

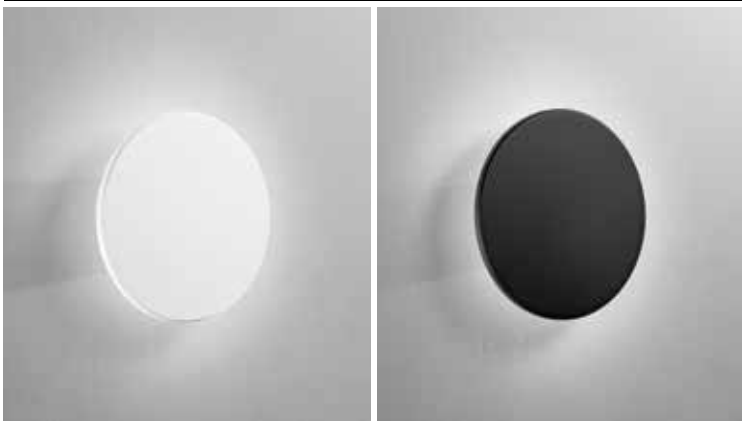

LED-W-ZODIAC-L-BCO

8031414889860



lumen

colour temp.



2450 lm

colour



LED-W-ZODIAC-L-NER

8031414889877

lumen



2450 lm



watt

18W

beam angle

360°

STEALTH

Appliche a LED in alluminio gofrato bianco o nero.
Aluminum LED wall lamp embossed white or black.



Materiale
alluminio

Colore
gofrato bianco
gofrato nero



Temperatura colore selezionabile
3000K / 4000K



Driver
incluso

Material
aluminum


Colour
embossed white
embossed black



Selectable color temperature
3000K / 4000K



Driver
included

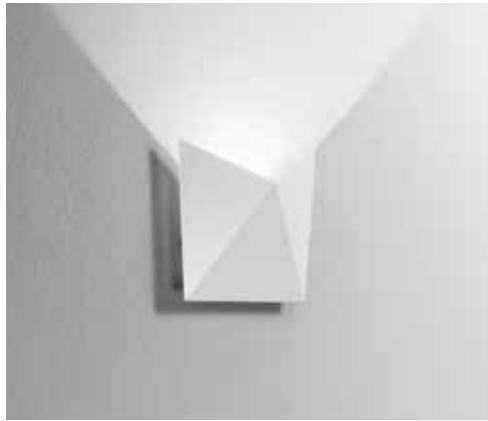

LED-W-STEALTH BCO

8031414866960

lumen

colour temp. | colour




580 lm

watt

6W

beam angle

120°



LED-W-STEALTH NER

8031414866953

lumen

colour temp. | colour




580 lm

watt

6W

beam angle

120°



MIURA

Applique a LED in alluminio
bianco goffrato ultrasottile.

Ultra-thin embossed white
aluminum LED wall light.



Materiale
alluminio

Colore
goffrato bianco



**Temperatura colore
selezionabile**
3000K / 4000K



Driver
incluso

Material
aluminium

Colour
embossed white



**Selectable color
temperature**
3000K / 4000K



Driver
included



LED-W-MIURA/6W

8031440351447

lumen

colour
temp.



520 lm

colour




watt

2 x 3W

beam angle

↓ 110° + 110° ↑



GAMMA

Applique a LED in alluminio gofrato bianco.
Aluminum LED wall lamp embossed white finish.



In.tec light **OUTDOOR APPLIQUE / WALL LAMPS**

Materiale
alluminio

Material
aluminum

Colore
gofrato bianco

Colour
embossed white



Temperatura colore selezionabile
3000K / 4000K

Selectable color temperature
3000K / 4000K



Driver
incluso

Driver
included



LED-W-GAMMA/10W

8031434041217

lumen

colour temp. | colour




1100 lm

watt

2 x 5W


beam angle

↓ 120° + 120° ↑



VEYRON

Applique a LED in alluminio con doppia emissione bianco o nero goffrato.
LED aluminum wall light with double emission in white or black.

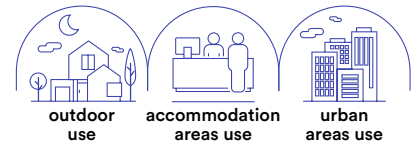

Materiale
alluminio

Colore
goffrato bianco
goffrato nero



Temperatura colore selezionabile
3000K / 4000K



Driver
incluso

Material
aluminum

Colour
embossed white
embossed black



Selectable color temperature
3000K / 4000K



Driver
included





LED-W-VEYRON BCO

8031440361163

lumen

colour temp. | colour




840 lm

watt

2 x 3,5W

beam angle

↓ 120° + 120° ↑



LED-W-VEYRON NERO

8031440361095

lumen

colour temp. | colour




840 lm

watt

2 x 3,5W


beam angle

↓ 120° + 120° ↑



BIOME

Applique a LED in alluminio bianco o nero gofrato.
LED aluminum wall lamps in embossed white or black.

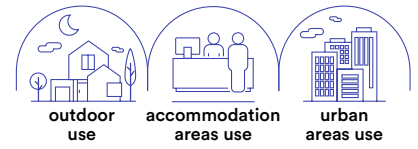

Materiale
alluminio

Colore
gofrato bianco
gofrato nero



Temperatura colore selezionabile
3000K / 4000K



Driver
incluso

Material
aluminum

Colour
embossed white
embossed black



Selectable color temperature
3000K / 4000K



Driver
included





LED-W-BIOME BCO

8031440361125

lumen

colour temp.



colour


840 lm

watt

2 x 3,5W

beam angle

↓ 120° + 120° ↑



LED-W-BIOME NERO

8031440361132

lumen

colour temp.



colour


840 lm

watt

2 x 3,5W

beam angle

↓ 120° + 120° ↑



GOLF

Appliche a LED in alluminio gofrato bianco o nero.
Aluminum LED wall lamp embossed white or black finish.



Materiale
alluminio

Colore
gofrato bianco
gofrato nero



Temperatura colore selezionabile
3000K / 4000K



Driver
incluso

Material
aluminum

Colour
embossed white
embossed black



Selectable color temperature
3000K / 4000K



Driver
included



LED-W-GOLF BCO

8031440361101

lumen

colour temp. | colour




840 lm

watt

2 x 3,5W

beam angle

↓ 120° + 120° ↑



LED-W-GOLF NERO

8031440361118

lumen

colour temp. | colour




840 lm

watt

2 x 3,5W

beam angle

↓ 120° + 120° ↑



POLO

Appliche a LED in policarbonato con singola o doppia emissione bianco o nero opaco.

Polycarbonate LED wall light with single or double emission in matt white or black.



Materiale

PC

Colore

bianco
nero



Temperatura colore selezionabile

3000K / 4000K



Driver

incluso

Material

PC

Colour

white
black



Selectable color temperature


3000K / 4000K





Driver

included





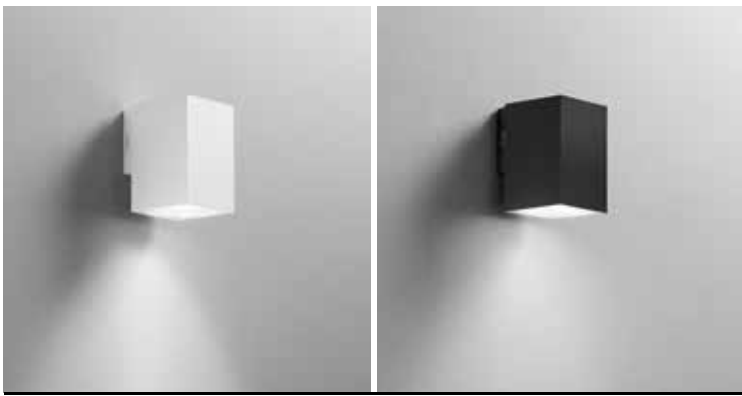


	colour temp.	colour
LED-W-POLO-Q1-BCO 8031414889655		
lumen	980 lm	
LED-W-POLO-Q1-NER 8031414889662		
lumen	980 lm	
watt	8W	
beam angle	60°	

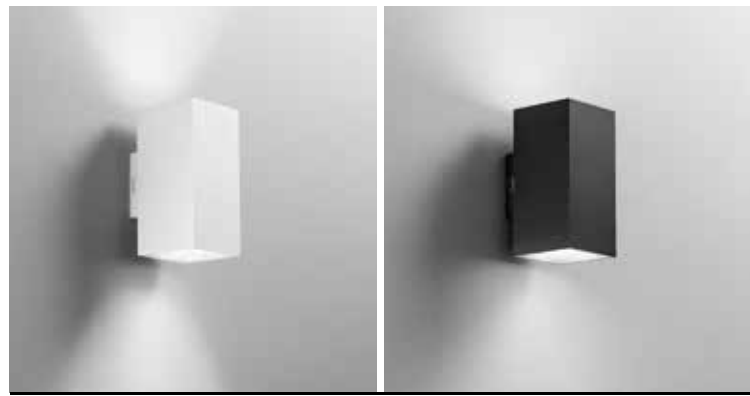


	colour temp.	colour
LED-W-POLO-Q2-BCO 8031414889679		
lumen	1960 lm	
LED-W-POLO-Q2-NER 8031414889686		
lumen	1960 lm	
watt	2 × 8W	
beam angle	↓ 60° + 60° ↑	

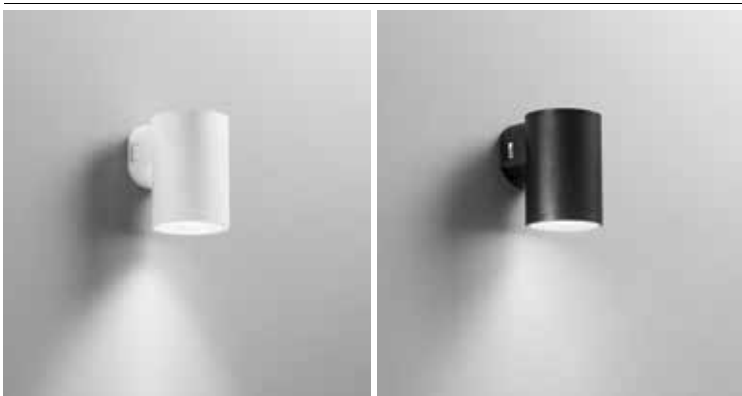

	colour temp.	colour
LED-W-POLO-R1-BCO 8031414889617		
lumen	980 lm	
LED-W-POLO-R1-NER 8031414889624		
lumen	980 lm	
watt	8W	
beam angle	60°	



	colour temp.	colour
LED-W-POLO-R2-BCO 8031414889631		
lumen	1960 lm	
LED-W-POLO-R2-NER 8031414889648		
lumen	1960 lm	
watt	2 × 8W	
beam angle	↓ 60° + 60° ↑	



RAY

Applique a LED in alluminio biemissione più
emissione frontale in antracite o corten goffrato.

Aluminum LED wall lamp double emission light and
front light stream embossed anthracite or corten finish.



Materiale

alluminio

Colore

goffrato antracite
goffrato corten



**Temperatura colore
selezionabile**

3000K / 4000K



Driver

incluso

Material

aluminum

Colour

embossed anthracite
embossed corten



**Selectable color
temperature**

3000K / 4000K



Driver

included





LED-W-RAY ANT

8031414867127

lumen

colour temp.	colour


1100+390 lm

watt

14W

beam angle

↓ 50° + 50° ↑ + 120° →



LED-W-RAY BRO

8031414870998

lumen

colour temp.	colour


1100+390 lm

watt

14W

beam angle


↓ 50° + 50° ↑ + 120° →



TWIN

Applique a LED in alluminio finitura bianco, antracite o nikel spazzolato.

Aluminum LED wall lamp in white, anthracite finish or brush nickel.

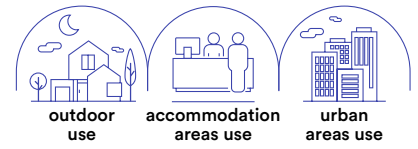

collection **TWIN**



In.tec light **OUTDOOR** APPLIQUE / WALL LAMPS

TWIN

Materiale

alluminio

Colore

bianco
antracite
nikel spazzolato



Temperatura colore

4000K



Temperatura colore selezionabile

3000K / 4000K



Driver

incluso

Material

aluminum

Colour

white
anthracite
brush nikel



Colour temperature

4000K




Selectable color temperature

3000K / 4000K




Driver



included

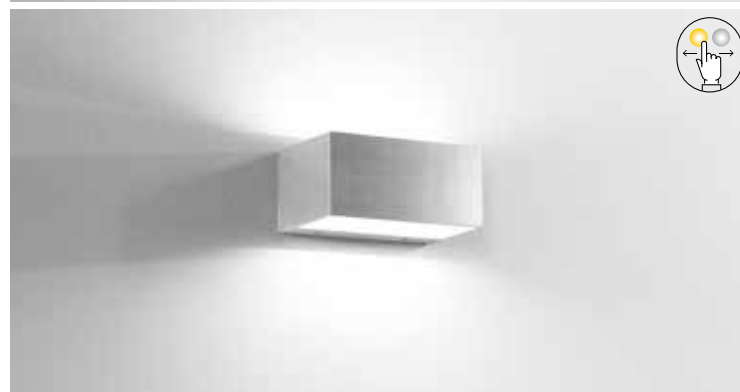

	colour temp.	colour
LED-W-TWIN-S BCO 8031414863976 lumen		
LED-W-TWIN-S ANT 8031414863709 lumen		
LED-W-TWIN-S NIK 8031414863983 lumen		


watt 12W
beam angle ↓ 90° + 90° ↑



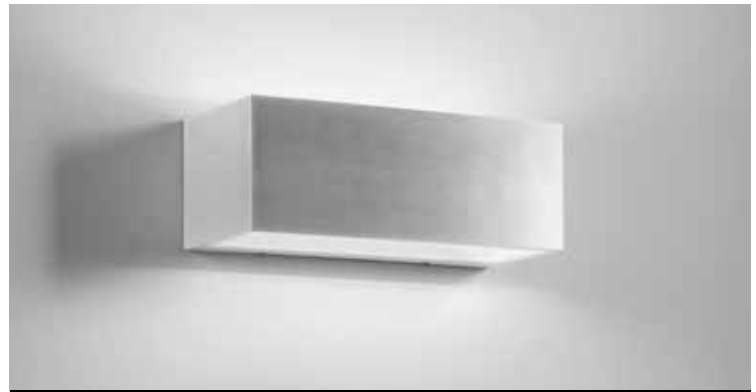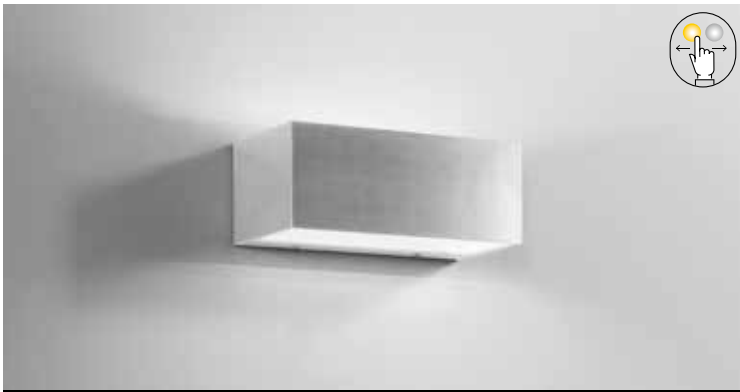


	colour temp.	colour
LED-W-TWIN-M BCO 8031414863969 lumen		
	2150 lm	
LED-W-TWIN-M ANT 8031414863693 lumen		
	2150 lm	
LED-W-TWIN-M NIK 8031414863990 lumen		
	2150 lm	

watt 18W
beam angle ↓ 90° + 90° ↑



	colour temp.	colour
LED-W-TWIN-XL BCO 8031414863716 lumen		
	4260 lm	
LED-W-TWIN-XL ANT 8031414863686 lumen		
	4260 lm	
LED-W-TWIN-XL NIK 8031414864362 lumen		
	4440 lm	

watt 35W
beam angle ↓ 90° + 90° ↑



DESERT

Applique a LED in alluminio con biemissione, emissione frontale con finitura bianco, antracite e bronzo.

LED aluminum wall lamp with double emission, frontal emission with white, anthracite and bronze finish.



outdoor
use



accommodation
areas use



urban
areas use





Materiale
alluminio

Colore
gofrato bianco
gofrato antracite
gofrato corten



Temperatura colore
3000K / 4000K



Driver
incluso

Material
aluminum


Colour
embossed white
embossed anthracite
embossed corten



Colour temperature
3000K / 4000K




Driver
included

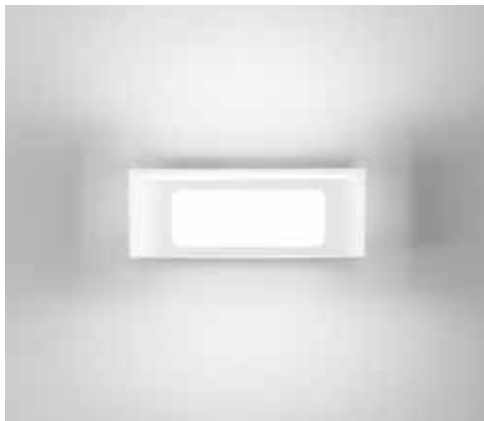


LED-W-DESERT-BCO
8031414922895

	colour temp.	colour
lumen	580 lm	
watt		12W
beam angle		120°




LED-W-DESERT-ANT
8031414922918

	colour temp.	colour
lumen	580 lm	
watt		12W
beam angle		120°



LED-W-DESERT-BRO
8031414922901

	colour temp.	colour
lumen	580 lm	
watt		12W
beam angle		120°



DUKROT

Applique in alluminio con diffusore in policarbonato.
Disponibile in bianco opaco, antracite e corten.
Aluminum wall lamp with polycarbonate diffuser
Available in matte white, anthracite and corten.



Materiale
alluminio

Colore
bianco opaco
antracite
corten



Temperatura colore selezionabile
3000K / 4000K



Driver
integrato

Material
aluminum

Colour
matt white
anthracite
corten





Selectable color temperature
3000K / 4000K





Driver
built-in




LED-W-DUKROT-BCO 8031414918591	colour temp.	colour
lumen	1440 lm	
watt	12W	
beam angle	180°	

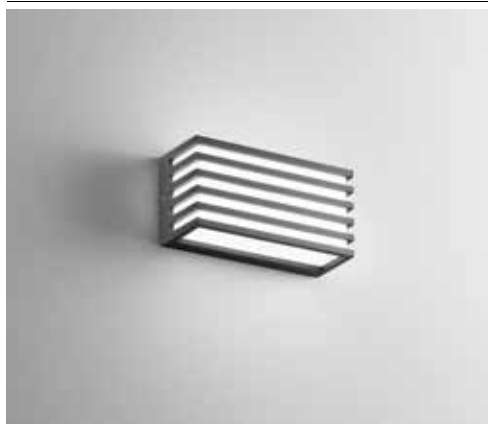

LED-W-DUKROT-ANT 8031414918584	colour temp.	colour
lumen	1440 lm	
watt	12W	
beam angle	180°	

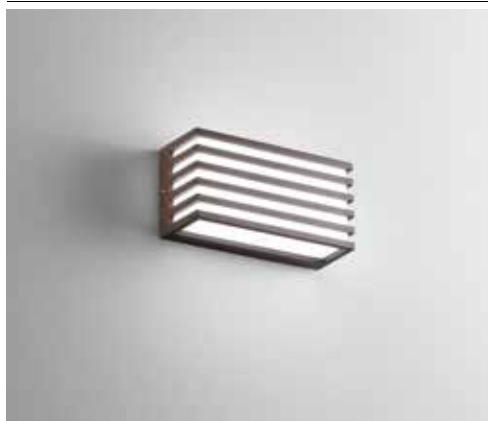

LED-W-DUKROT-BRO 8031414918607	colour temp.	colour
lumen	1440 lm	
watt	12W	
beam angle	180°	



WEISS

Applique a LED in alluminio con finitura bianco, nero o corten.
Aluminum LED wall light in white, black and corten finish.



Materiale
alluminio

Colore
bianco
nero
corten



Temperatura colore selezionabile
3000K / 4000K



Driver
integrato

Material
aluminum

Colour
white
black
corten



Selectable color temperature
3000K / 4000K



Driver
built-in



LED-W-WEISS-BCO

8031414897193

lumen


colour temp. | colour



1800 lm

watt 16W

beam angle ↓ 120° + 120° ↑



LED-W-WEISS-NER

8031414897216

lumen


colour temp. | colour



1800 lm

watt 16W

beam angle ↓ 120° + 120° ↑



LED-W-WEISS-BRO

8031414897209

lumen


colour temp. | colour



1800 lm

watt 16W


beam angle ↓ 120° + 120° ↑



BORDER

Applique angolare a LED con struttura e diffusore in policarbonato e finitura bianco o nero opaco.

Angular LED wall lamp with structure and diffuser in PC and matt white and black finish.

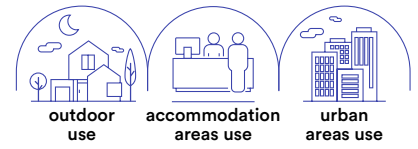

Materiale

PC

Colore

bianco opaco
nero opaco



Temperatura colore

3000K / 4000K



Driver

incluso

Material

PC

Colour

matt white
matt black



Colour temperature

3000K / 4000K




Driver

included






LED-BORDER-30M-BCO 8031414883578	colour temp.	colour
lumen	3550 lm	
watt	30W	
beam angle	120°	

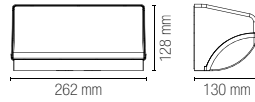

LED-BORDER-30M-ANT 8031414883561	colour temp.	colour
lumen	3550 lm	
watt	30W	
beam angle	120°	

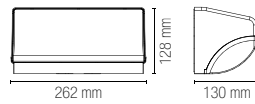

LUXON

Appliche angolare a LED con struttura e diffusore in alluminio e finitura bianco gofrato.

Angular LED wall lamp with structure and diffuser in aluminum and embossed white and black finish.



Materiale

alluminio

Colore

gofrato bianco
gofrato nero



Temperatura colore selezionabile

3000K / 4000K



Driver

incluso

Material

aluminum

Colour

embossed white
embossed black



Selectable color temperature

3000K / 4000K



Driver

included





LED-W-LUXON BCO

8031414870677

lumen


colour temp.	colour
--------------	--------



1550 lm

watt	12W
------	-----

beam angle	120°
------------	------



LED-W-LUXON ANT

8031414867097

lumen


colour temp.	colour
--------------	--------



1550 lm

watt	12W
------	-----

beam angle	120°
------------	------



GRIS

Applique a LED in alluminio con finitura bianco o nero.
LED wall light in aluminum with white or black finish.





Materiale
alluminio

Colore
bianco
nero



Temperatura colore selezionabile
3000K / 4000K



Driver
integrato

Material
aluminum

Colour
white
black



Selectable color temperature
3000K / 4000K




Driver
built-in



LED-W-GRIS-BCO
8031414897223

lumen 1390 lm

watt 12W
beam angle 180°




colour temp. colour



LED-W-GRIS-NER
8031414897230

lumen 1390 lm

watt 12W
beam angle 180°




colour temp. colour



AGERA

Applique a LED in alluminio goffrato nero.
Aluminum LED wall lamp embossed black finish.

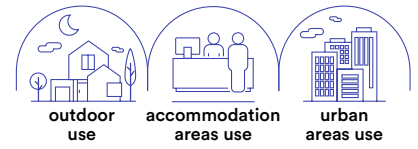

Materiale
alluminio

Colore
goffrato nero



Temperatura colore selezionabile
3000K / 4000K



Driver
incluso

Material
aluminum

Colour
embossed black



Selectable color temperature
3000K / 4000K



Driver
included





LED-W-AGERA-90

8031440360951

lumen


colour temp. | colour



680 lm

watt 2 × 3W

beam angle ↓ 120° + 120° ↑



LED-W-AGERA-180

8031440360975

lumen


colour temp. | colour



1380 lm

watt 2 × 6W

beam angle ↓ 120° + 120° ↑



BOXTER

Applique a LED in alluminio goffrato bianco, silver, nero o corten.
Aluminum LED wall lamp embossed white, silver, black or corten finish.



Materiale

alluminio

Colore

bianco
silver
nero
corten



Temperatura colore

4000K



Temperatura colore selezionabile

3000K / 4000K



Driver

incluso

Material

aluminum

Colour

white
silver
black
corten



Colour temperature

4000K




Selectable color temperature

3000K / 4000K



Driver

included

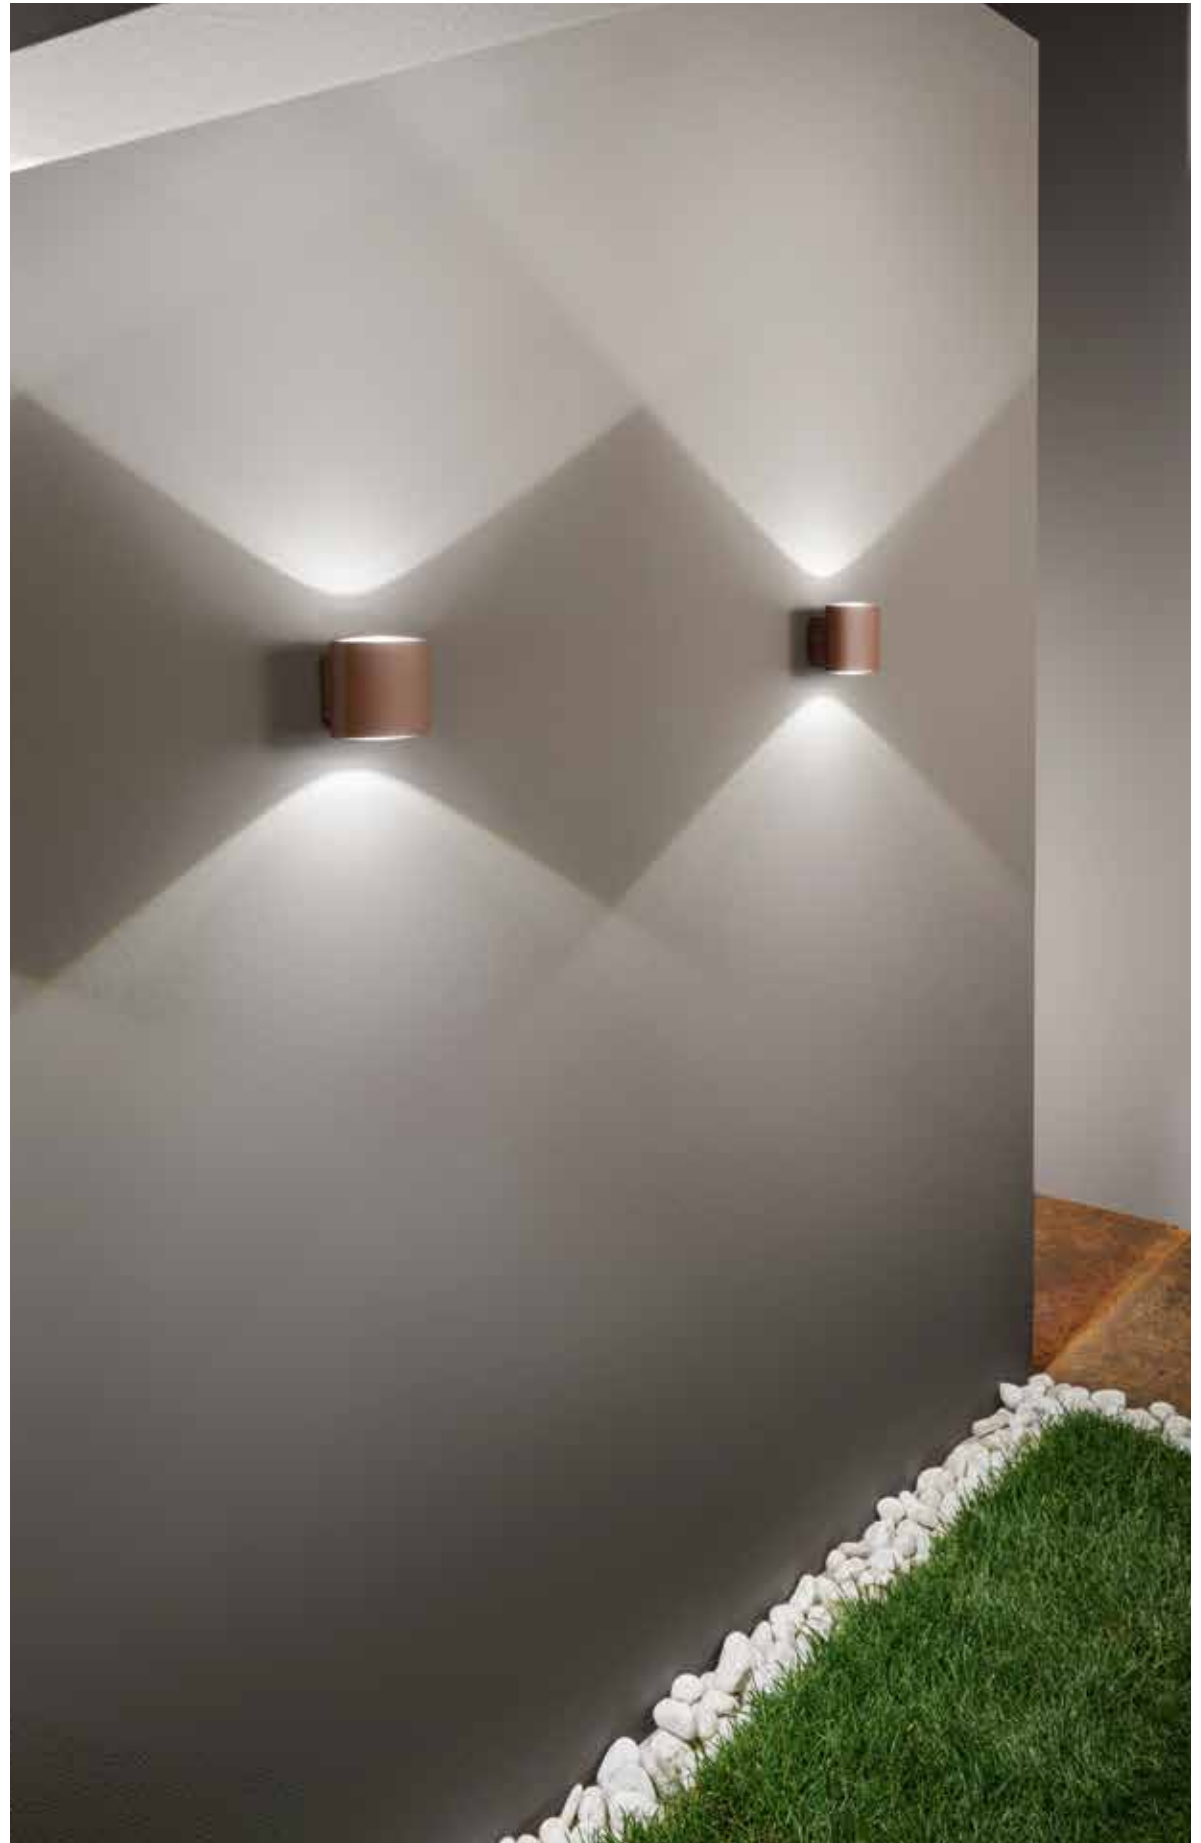



LED-W-BOXTER BCO

8031414873043

lumen


colour temp.



960 lm

watt $2 \times 4W$

beam angle $\downarrow 120^\circ + 120^\circ \uparrow$



LED-W-BOXTER SIL

8031414862399

lumen


colour temp.



800 lm

watt $2 \times 4W$

beam angle $\downarrow 120^\circ + 120^\circ \uparrow$



LED-W-BOXTER NER

8031414862382

lumen


colour temp.



960 lm

watt $2 \times 4W$

beam angle $\downarrow 120^\circ + 120^\circ \uparrow$



LED-W-BOXTER BRO

8031414862405

lumen


colour temp.



960 lm

watt $2 \times 4W$

beam angle $\downarrow 120^\circ + 120^\circ \uparrow$



KLEIN

Appliche a LED in policarbonato con
biemissione nei colori bianco e nero.

Polycarbonate LED wall light with
biemissione in matt white or black.



Materiale

PC

Colore

bianco opaco
nero opaco



Temperatura colore

3000K / 4000K



Driver

integrato

Material

PC

Colour

matt white
matt black




Colour temperature

3000K / 4000K





Driver


built-in

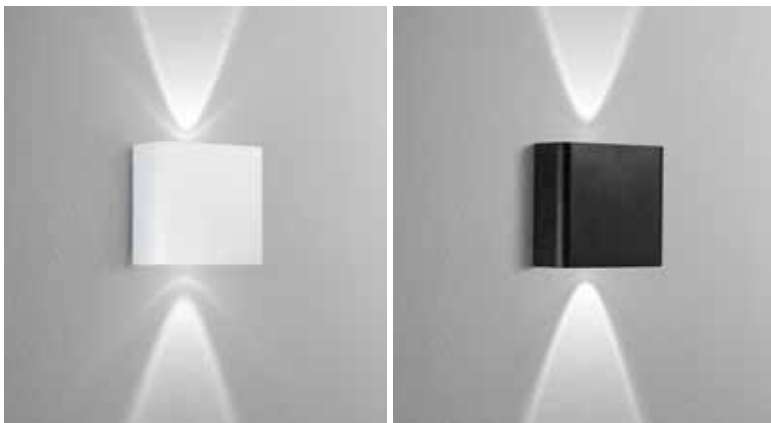

	colour temp.	colour
LED-W-KLEIN-AP2-BCO 8031414916337		
lumen	200 lm	
LED-W-KLEIN-AP2-NER 8031414916320		
lumen	200 lm	
watt	2W	
beam angle	60°	

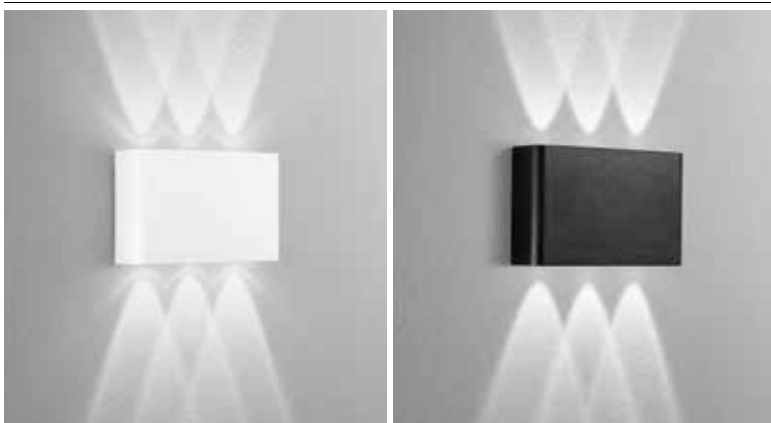


	colour temp.	colour
LED-W-KLEIN-AP6-BCO 8031414916351		
lumen	600 lm	
LED-W-KLEIN-AP6-NER 8031414916344		
lumen	600 lm	
watt	6W	
beam angle	60°	



BEETLE

Applique a LED in alluminio bianco o antracite goffrato.
Aluminum LED wall lamp embossed white or anthracite finish.

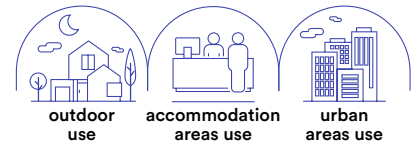

Materiale
alluminio

Colore
goffrato bianco
goffrato antracite



Temperatura colore selezionabile
3000K / 4000K



Driver
incluso

Material
aluminum

Colour
embossed white
embossed anthracite








Selectable color temperature
3000K / 4000K




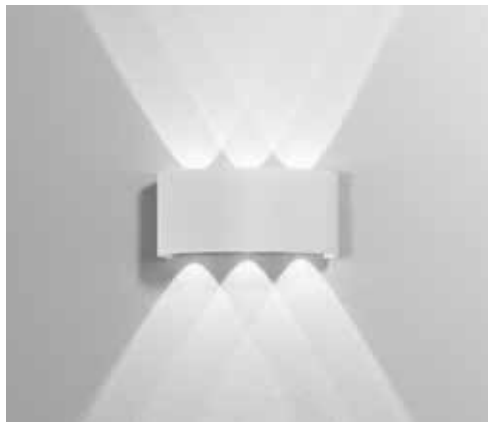


Driver
included






	colour temp.	colour
LED-W-BEETLE BCO 8031414876952	  	
lumen	600 lm	
watt	6W	
beam angle	100°	



	colour temp.	colour
LED-W-BEETLE GR 8031414876969	  	
lumen	600 lm	
watt	6W	
beam angle	100°	



RIBBON





- Materiale**
alluminio

- Colore**
gofrato antracite
-

- Temperatura colore**
4000K
-

- Driver**
incluso

- Material**
aluminum

- Colour**
embossed anthracite
-

- Colour temperature**
4000K
-

- Driver**
included


Fascia a LED in alluminio in antracite gofrato.
Aluminum LED applique in embossed anthracite finish.



LED-RIBBON-42
8031414882335
lumen

colour temp.	colour
●	●
1600 lm	


watt	2 × 6W
beam angle	120°

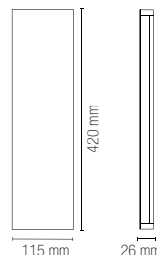

LED-RIBBON-72
8031414882342
lumen

colour temp.	colour
●	●
2600 lm	

watt	2 × 10W
beam angle	120°

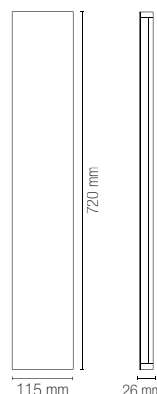

LASER



outdoor
use



accommodation
areas use



urban
areas use



Materiale
termoplastica

Colore
antracite



Temperatura colore
4000K



Driver
incluso

Material
thermoplastic

Colour
anthracite



Colour temperature
4000K



Driver
included


Applicque a LED in termoplastica antracite.
LED wall lamp in thermoplastic anthracite.



LED-LASER
8031414882328
lumen

colour temp.	colour
170 lm	


watt	3W
beam angle	5°



LED-LASER-BIS
8031414882311
lumen

colour temp.	colour
40 lm	

watt	5W
beam angle	2 × 4°



ALFA

Appliche a LED in alluminio con
paratie regolabili indipendenti.

Aluminum LED wall lamp with
independent adjustable wings.



Materiale

alluminio

Colore

goffrato bianco
goffrato silver
goffrato antracite
goffrato corten



Temperatura colore

3000K / 4000K



Driver

incluso

Material

aluminum

Colour

embossed white
embossed silver
embossed anthracite
embossed corten



Colour temperature

3000K / 4000K



Driver

included



ALFA

Materiale

alluminio

Colore

goffrato bianco
goffrato silver



Temperatura colore

3000K / 4000K



Driver

incluso

Material

aluminum

Colour

embossed white
embossed silver




Colour temperature

3000K / 4000K



Driver

included

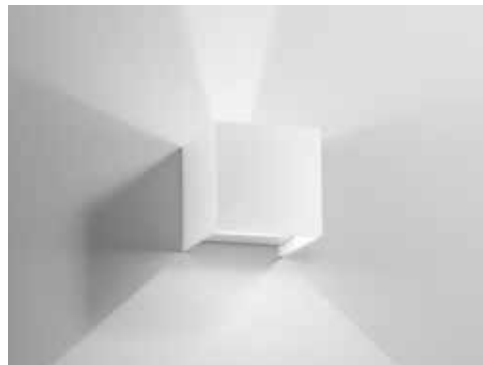

LED-W-ALFA-10-BCO

8031414905843

lumen

colour
temp.



colour




1200 lm

watt

2 × 5W

beam angle

↓ 10°/120° + 10°/120° ↑



LED-W-ALFA-10-GR

8031414905850

lumen

colour
temp.



colour




1200 lm

watt


2 × 5W

beam angle

↓ 10°/120° + 10°/120° ↑



Luce biemissione con paratie regolabili indipendenti /
Bi-emission light with independent adjustable wings

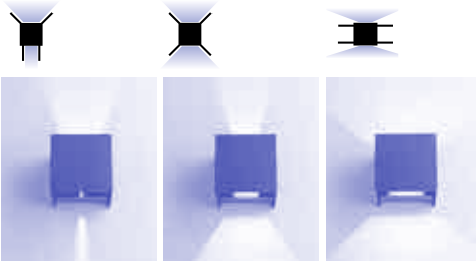



Materiale

alluminio

Colore

goffrato bianco
goffrato antracite
goffrato corten



Temperatura colore

3000K / 4000K



Driver

incluso

Material

aluminum

Colour

embossed white
embossed anthracite
embossed corten




Colour temperature

3000K / 4000K



Driver

included

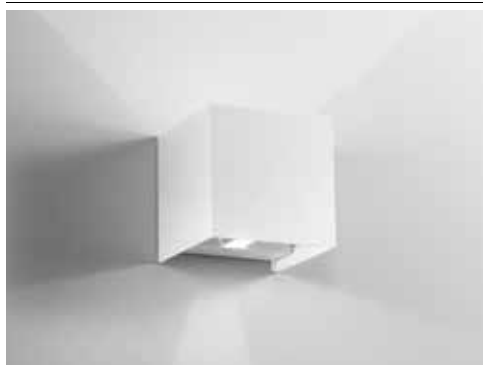

LED-W-ALFA-20-BCO

8031414905867


lumen

colour temp. | colour



1800 lm

watt 20W
beam angle ↓ 10°/120° + 10°/120° ↑



LED-W-ALFA-20-ANT

8031414905874


lumen

colour temp. | colour



1800 lm

watt 20W
beam angle ↓ 10°/120° + 10°/120° ↑



LED-W-ALFA-20-BRO

8031414905881


lumen

colour temp. | colour




1800 lm

watt 20W
beam angle ↓ 10°/120° + 10°/120° ↑



Luce biemissione con paratie regolabili indipendenti /
Bi-emission light with independent adjustable wings

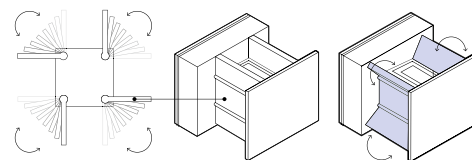

DELTA

Applique a LED in alluminio bianco o silver goffrato con paratie regolabili indipendenti.

Aluminum LED wall lamp in embossed white or silver finish with independent adjustable wings.

Materiale

alluminio

Colore

goffrato bianco
goffrato silver



Temperatura colore

3000K / 4000K



Driver

incluso

Material

aluminum

Colour

embossed white
embossed silver



Colour temperature


3000K / 4000K



Driver

included



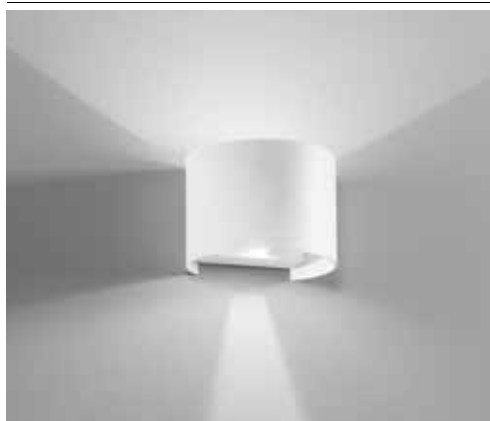

LED-W-DELTA-10-BCO

8031414905829

lumen


colour temp. | colour



700 lm

watt 2 × 5W

beam angle ↓ 10°/120° + 10°/120° ↑



LED-W-DELTA-10-GR

8031414905836

lumen


colour temp. | colour





700 lm

watt 2 × 5W

beam angle ↓ 10°/120° + 10°/120° ↑



Luce biemissione con paratie regolabili indipendenti /
Bi-emission light with independent adjustable wings

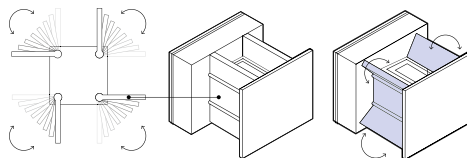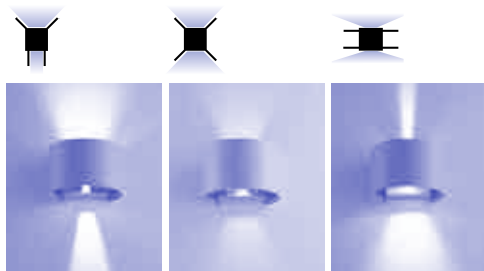

PARKER

Applique a LED in cemento bianco o grigio naturale.
LED wall lamp in natural white or grey concrete.



Materiale
cemento

Colore
bianco
grigio



Temperatura colore
4000K



**Temperatura colore
selezionabile**
3000K / 4000K



Driver
incluso

Material
concrete

Colour
white
grey



Colour temperature
4000K



**Selectable color
temperature**
3000K / 4000K



Driver
included







LED-PARKER-AP30

8031414864195

lumen

colour temp.



colour




1080 lm

watt

9W

beam angle

↓ 120° + 120° ↑



Connettore IP65 incluso / IP65 connector included



LED-PARKER-AP40

8031414864201

lumen

colour temp.



colour




1400 lm

watt

12W

beam angle

↓ 120° + 120° ↑



Connettore IP65 incluso / IP65 connector included



LED-PARKER-AP60

8031414862504

lumen

colour temp.



colour




2640 lm

watt

20W

beam angle

↓ 120° + 120° ↑



Connettore IP65 incluso / IP65 connector included



LED-PARKER-AP120

8031414862511

lumen

colour temp.



colour




1500 lm

watt

30W

beam angle

↓ 120° + 120° ↑



Connettore IP65 incluso / IP65 connector included



LED-PARKER-AP30 GR

8031414866977

lumen


colour temp. | colour



1080 lm

watt 8,6W

beam angle ↓ 120° + 120° ↑



Connettore
IP65 incluso /
IP65 connector
included



LED-PARKER-AP50 GR

8031414866984

lumen


colour temp. | colour



2100 lm

watt 16W

beam angle ↓ 120° + 120° ↑




Connettore
IP65 incluso /
IP65 connector
included



PORTLAND

Applique cilindrico in cemento bianco.
Cylindrical wall lamp in white concrete.



colour
I-PORTLAND-AP2 BCO
8031414863563
2 x GU10 MAX 35W



-  Connettore IP65 incluso / IP65 connector included
-  Lampadina non inclusa / Light bulb not included

OAKLAND


Applique in cemento bianco.
Wall lamp in white concrete.



I-OAKLAND-AP2 BCO
8031414864218



2 x GU10 MAX 10W



Connettore IP65 incluso /
IP65 connector included




Lampadina non inclusa /
Light bulb not included

In.tec light **OUTDOOR** APPLIQUE / WALL LAMPS

JUMP

Applique in alluminio bianco, silver o in acciaio inox.
Wall lamp aluminum white, silver finish or stainless steel.





colour

I-JUMP-AP2 BCO

8031414862351



I-JUMP-AP2 SIL

8031414862344




I-JUMP-AP2 INOX

8031414862368



2 x GU10 MAX 35W



Lampadina non inclusa /
Light bulb not included




colour

I-JUMP-AP2-E27 SIL

8031414865390



2XE27 MAX 60W



Lampadina non inclusa /
Light bulb not included

ONE

**Appliche a LED in alluminio con singola o doppia
emissione bianco, antracite o corten goffrato.**

Aluminum LED wall light with single or double emission
in embossed white, anthracite or corten.





colour

I-ONE-AP1 BCO

8031414878857



I-ONE-AP1 ANT

8031414073009



I-ONE-AP1 BRO

8031414048861



1 x GU10 MAX 35W



Lampadina non inclusa /
Light bulb not included



colour

I-ONE-AP2 BCO

8031414878864



I-ONE-AP2 ANT

8031414082100




I-ONE-AP2 BRO

8031414079995



2 x GU10 MAX 35W




Lampadina non inclusa /
Light bulb not included

QUBO

Applique a LED in alluminio con singola o doppia emissione bianco, antracite o corten goffrato.

Aluminum LED wall light with single or double emission in embossed white, anthracite or corten.





colour

I-QUBO-AP1 BCO

8031414878833



I-QUBO-AP1 ANT

8031414084203



I-QUBO-AP1 BRO

8031414082117



1 x GU10 MAX 35W



Lampadina non inclusa /
Light bulb not included



colour

I-QUBO-AP2 BCO

8031414878840



I-QUBO-AP2 ANT

8031414084289




I-QUBO-AP2 BRO

8031414083336



2 x GU10 MAX 35W




Lampadina non inclusa /
Light bulb not included

TUCSON

Applique in alluminio bianco, silver o bronzo gofrato con diffusore in policarbonato.
Aluminum wall lamp in embossed white, silver or bronze PC diffuser.





I-TUCSON-AP BCO
8031414862160

colour



2 x E14 MAX 40W



Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included



I-TUCSON-AP SIL
8031414862184

colour



2 x E14 MAX 40W



Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included



I-TUCSON-AP BRO
8031414862191

colour



2 x E14 MAX 40W



Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included

HURACAN

Applique in alluminio pressofuso antracite goffato.
Aluminum die-cast wall lamp embossed anthracite finish.




colour



I-HURACAN-AP
8031440361026

1 x GU10 MAX 35W



Lampadina non inclusa /
Light bulb not included

SEATTLE

Applique in alluminio, finitura antracite con diffusore opale in policarbonato.

Aluminum wall lamp with anthracite finish and PC opal diffuser.




colour



I-SEATTLE-AP
8031440312233

1 x E27 MAX 42W



Lampadina non inclusa /
Light bulb not included

AUSTIN

**Applique in alluminio bianco, silver,
nero o bronzo con diffusore in policarbonato.**

Aluminum wall lamp white, silver,
black or bronze PC diffuser.





I-AUSTIN-AP BCO
8031440362122


colour



1 x E27 MAX 42W



Lampadina non inclusa /
Light bulb not included



I-AUSTIN-AP SIL
8031414862429


colour



1 x E27 MAX 42W



Lampadina non inclusa /
Light bulb not included



I-AUSTIN-AP NER
8031440362139


colour



1 x E27 MAX 42W



Lampadina non inclusa /
Light bulb not included



I-AUSTIN-AP BRO
8031440362108


colour



1 x E27 MAX 42W



Lampadina non inclusa /
Light bulb not included



BOSTON

Applique in alluminio finitura antracite
con diffusore opale in policarbonato.

Aluminum wall lamp anthracite finish with PC opal diffuser.



outdoor
use



accommodation
areas use



urban
areas use




colour



I-BOSTON-AP
8031440312240

1 x E27 MAX 42W




Lampadina
non inclusa /
Light bulb
not included

ATLANTA

Applique in alluminio finitura antracite
con diffusore opale in policarbonato.


Aluminum wall lamp anthracite finish with PC opal diffuser.



colour 

I-ATLANTA-AP
8031440312257

1 x E27 MAX 42W




Lampadina non inclusa /
Light bulb not included

DENVER

Applique in alluminio finitura antracite
con diffusore opale in policarbonato.


Aluminum wall lamp anthracite finish with PC opal diffuser.



colour 

I-DENVER-AP
8031440312264

1 x E27 MAX 42W



Lampadina non inclusa /
Light bulb not included

In.tec light OUTDOOR APPLIQUE / WALL LAMPS


MONDRIAN

Applique in metallo bianco, nero, silver o bronzo con diffusore in vetro.
Metal wall lamp white, black, silver or bronze glass diffuser.



	colour
I-MONDRIAN-AP BCO 8031414896134	
I-MONDRIAN-AP SIL 8031414862306	
I-MONDRIAN-AP NER 8031414896127	
I-MONDRIAN-AP BRO 8031414862313	

1 x E27 MAX 25W




Lampadina
non inclusa /
Light bulb
not included

GAETA

Lantern in alluminio pressofuso finitura nero-oro con diffusore in vetro.
Diecast aluminum black-gold finish lantern with glass diffuser.



In.tec light **OUTDOOR APPLIQUE / WALL LAMPS**




LANT-GAETA-AP1
8031440313278

colour



1 x E27 MAX 60W



Lampadina
non inclusa /
Light bulb
not included


GRUBB

Proiettore in termoplastica picchetto incluso.
 Termoplastic flood light with spike included.



LED-GRUBB-7M
 8031414883554

1 x E27

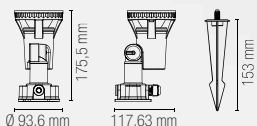

colour



Accessori inclusi /
 Included accessories



**Lampadina LED SMD /
 LED SMD light bulb**


watt	7W
beam angle	100°
cri	80
on/off	>10.000
durata/life time	25000h

4000K	
lumen	510 lm
dimmer	



LED-GRUBB-15M
 8031414883547

1 x E27

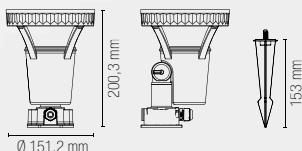

colour



Accessori inclusi /
 Included accessories



**Lampadina LED SMD /
 LED SMD light bulb**

watt	15W
beam angle	100°
cri	80
on/off	>10.000
durata/life time	25000h

4000K	
lumen	1100 lm
dimmer	

AKRON

Proiettore in alluminio con picchetto incluso.
Aluminum flood light with spike included.



colour

I-AKRON-BCO

8031414882649



I-AKRON-NER

8031414882663



I-AKRON-BRO

8031414882656



1 x GU10 MAX 35W



OUTDOOR APPLIQUE / WALL LAMPS
In.tec light



Lampadina non inclusa /
Light bulb not included



outdoor
use



accommodation
areas use



urban
areas use





Materiale

PC

Colore

nero



Temperatura colore

3000K / 4000K



Driver

integrato

Material

PC

Colour

black



Colour temperature

3000K / 4000K



Driver


built-in

Proiettore in termoplastica con picchetto incluso.

Termoplastic flood light with spike included.




	colour temp.	colour
LED-PEG-9C-NER 8031414889600 lumen		
LED-PEG-9M-NER 8031414895403 lumen		
watt	9W	
beam angle	60°	



TOGO

Plafoniera a LED in acrilico.
LED acrylic ceiling lamp with diffuser.



Materiale

Acrilico PMMA

Colore

bianco



Temperatura colore selezionabile

3000K / 4000K / 6500K



Driver

integrato

Material

PMMA acrylic

Colour

white



Selectable color temperature


3000K / 4000K / 6500K



Driver

built-in driver






LED-TOGO-Q10

8031414883615

lumen

colour temp.		colour	
600 lm			

watt	5W
beam angle	120°




LED-TOGO-Q25

8031414883646

lumen

colour temp.		colour	
2400 lm			

watt	20W
beam angle	120°




LED-TOGO-RT20

8031414883622

lumen

colour temp.		colour	
1000 lm			

watt	8W
beam angle	120°




LED-TOGO-RT30

8031414883639


lumen

colour temp.		colour	
1500 lm			

watt	12W
beam angle	120°




OUTDOOR

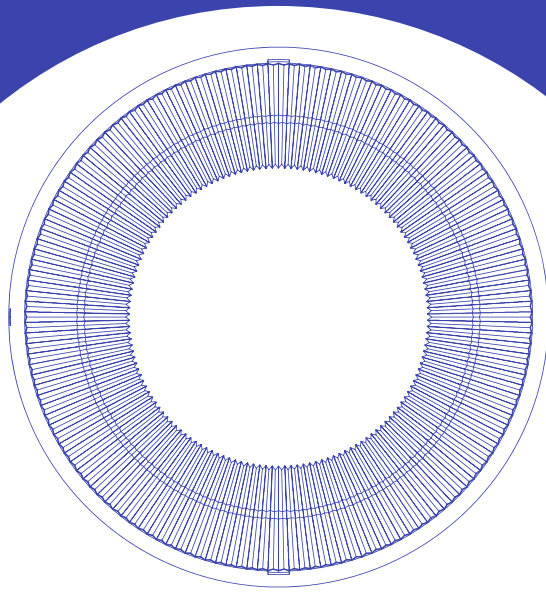

PLAFONIERE
CEILING LAMPS

ZOOM

Plafoniera a LED wifi con videocamera di sicurezza integrata.
LED wifi ceiling lamp with built-in security camera.

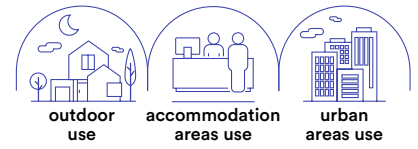

Materiale

alluminio + PC

Colore

goffrato antracite



Temperatura colore

4000K



Driver

integrato

Material

aluminium + PC

Colour

Embossed anthracite



Colour temperature

4000K



Driver

built-in





LED-ZOOM-INT

8031414877874

lumen

colour temp. colour





3600 lm

watt 30W

beam angle 110°

pf 0.95

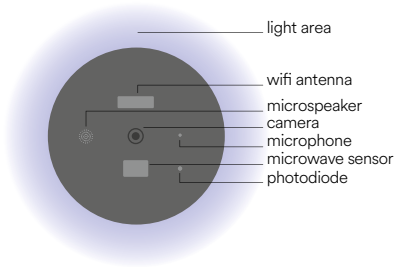

Tipo di sensore video
Video sensor type

Pixel

Illuminazione minima
Min illuminance

Angolo vista camera
Camera view angle

Otturatore
Shutter

Infrarossi
IR

WDR

Video compression standard

Risoluzione video
Max picture size

Frequenza fotogrammi
Frame rate

Audio

Memoria

Impostazione immagine
Image setting

Reset

Controllo della luce
Lighting control

Interfaccia di protocollo
Interface protocol

Comunicazione di protocollo
Communication protocol

Funzioni generali
General function

Wi-Fi

PIR

1/2,9" CMOS

2.0 Mega

Color 0.10lux @F2.0,
black and white 0.01lux @F2.0

135°

1/25-1/100,000 per second

High power LED with ICR

Digital WDR

H.264
32Kbps - 2Mbps

1920x1080

1-20 per second

Full duplex audio (doppio sistema di comunicazione)

Support SD card (MAX 128Gb) Cloud storage NVR

Support HD/SD; support mirror

Support

Support manual, sensor, plan switch light (gestione accensioni)



Private

TCP/IP, HTTP, DHCP, DNS, RTSP

Dual stream, password protection

IEEE802.11b/g/n

Support PIR and motion detection



Control system easy installation

Full duplex audio



Smart Intec WIFI




RF 2.4G control system



ALEXA e GOOGL HOME voice control



compatible with AMAZON ECHO SHOW GOOGLE CHROME CAST

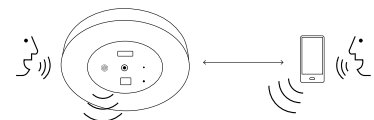

CITIZEN

Plafoniera in alluminio nelle versioni bianco, nero o corten.
Ceiling wall lamp white, black or corten finish.





I-CITIZEN-Q1-BCO

8031414882922

I-CITIZEN-Q1-NER

8031414882939

I-CITIZEN-Q1-BRO

8031414882915


colour



1 x E27



Lampadina non inclusa /
Light bulb not included



I-CITIZEN-R1-BCO

8031414882892

I-CITIZEN-R1-NER

8031414882908

I-CITIZEN-R1-BRO

8031414882885


colour



1 x E27



Lampadina non inclusa /
Light bulb not included



TOWER

Plafoniera in alluminio nelle versioni bianco, nero o corten.
Ceiling wall lamp white, black or corten finish.





	colour
I-TOWER-Q1-BCO 8031414922093	
I-TOWER-Q1-NER 8031414922116	
I-TOWER-Q1-BRO 8031414922109	

1 x GX53



Lampadina non inclusa /
Light bulb not included



	colour
I-TOWER-R1-BCO 8031414918522	
I-TOWER-R1-NER 8031414918515	
I-TOWER-R1-BRO 8031414918539	

1 x GX53




Lampadina non inclusa /
Light bulb not included



ISCHIA

Plafoniera LED integrato, in termoplastica bianco con diffusore trasparente effetto diamantato.

Thermoplastic LED ceiling lamp with transparent diamond effect diffuser.

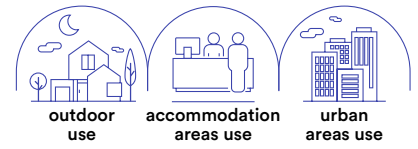

Materiale
termoplastica



Temperatura colore
3000K / 4000K



Driver
integrato

Material
thermoplastic

Colour temperature
3000K / 4000K



Driver
built-in



LED-ISCHIA-L-BCO

8031414883608

lumen

colour temp.




2300 lm

watt

20W

beam angle


100°



CAPRI

Plafoniera LED integrato, in termoplastica bianco con diffusore trasparente effetto diamantato.

Thermoplastic LED ceiling lamp with transparent diamond effect diffuser.

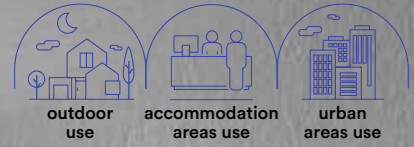

In.tec light OUTDOOR PLAFONIERE / CEILING LAMPS

Materiale
termoplastica

Temperatura colore
3000K / 4000K



Driver
integrato

Material
thermoplastic

Colour temperature
3000K / 4000K



Driver
built-in



LED-CAPRI-S-BCO
8031414883585
lumen



colour temp.	colour
2350 lm	

watt	20W
beam angle	100°

LED-CAPRI-L-BCO
8031414883592
lumen

colour temp.	colour
3200 lm	

watt	30W
beam angle	100°



ALWAYS



Materiale
PC + PC

Temperatura colore

2700K / 3000K / 4000K / 5000K / 6500K



Driver
integrato

Material
PC + PC

Colour temperature

2700K / 3000K / 4000K / 5000K / 6500K




Driver
built-in



Plafoniera in termoplastica con selettore interno di watt e gradi Kelvin. Sensore radar 5.8GHz integrato con tasto di regolazione durata.

Thermoplastic ceiling lamp with internal watt and Kelvin selector. integrated 5.8GHz radar sensor with duration adjustment button.



LED-ALWAYS-RS

8031414926923


lumen

colour temp.	colour
1500lm / 1900lm / 2250lm	

watt	15W / 20W / 25W
beam angle	120°
pf	0.90

Accessori inclusi / Included accessories

Sensore di movimento radar /
Radar motion sensor

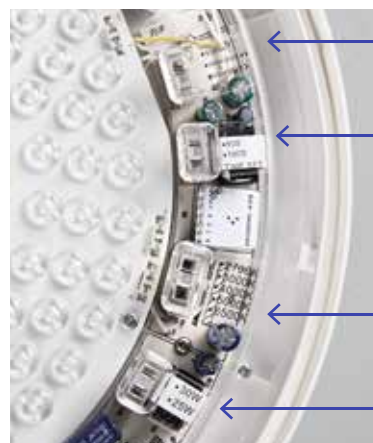

Modalità sensore:
solo movimento - crepuscolare + movimento - solo crepuscolare /
Sensor mode: motion only - dusk + motion - dusk only

Selezione durata accensione
con sensore di movimento 60S - 180S /
Motion sensor duration selection: 60S - 180S

Selezione gradi kelvin: 2700K 3000K 4000K 5000K 6500K /
Kelvin degrees selection: 2700K 3000K 4000K 5000K 6500K

Selezione potenza: 15W 25W 30W /
Power selection: 15W 25W 30W

HUBLOT SENS



Materiale
PC + PC

Temperatura colore
3000K / 4000K / 6500K



Driver
integrato

Material
PC + PC

Colour temperature
3000K / 4000K / 6500K




Driver
built-in




Plafoniera in termoplastica con selettore interno Kelvin, sensore microwave regolabile integrato regolabile.

Thermoplastic ceiling lamp with internal Kelvin selector, integrated adjustable microwave sensor.



LED-HUBLOT-SENS

8031414919604
lumen



watt	18W
beam angle	120°
pf	0.90

Accessori inclusi / Included accessories

Sensore di movimento 100% luce
Dopo 30 secondi 20% luce /
Motion sensor 100% light
After 30 seconds 20% light

sensore regolabile con LED-SENSOR-REMOTE p. 860
adjustable sensor with LED-SENSOR-REMOTE p. 860



OUTDOOR PLAFONIERE / CEILING LAMPS
In.tec light

SENSITIVE





Materiale

PP + PC

Colore

bianco
antracite



Temperatura colore

3000K / 4000K



Driver

integrato

Material

PP + PC

Colour

white
anthracite



Colour temperature

3000K / 4000K



Driver

built-in



Plafoniera LED integrato con sensore di movimento; materiale base in PP bianco o antracite con diffusore bianco PC.

LED ceiling lamp with motion sensor; PP white base or anthracite colour with white PC diffuser.




Accessori inclusi / Included accessories

Sensore di movimento regolabile / Adjustable motion sensor



	colour temp.	colour
LED-SENSITIVE-C BCO 8031414876815 lumen	1000 lm	
LED-SENSITIVE-BCO 8031440361750 lumen	1600 lm	
LED-SENSITIVE-ANT 8031440361743 lumen	1600	
watt	14W	
beam angle	120°	

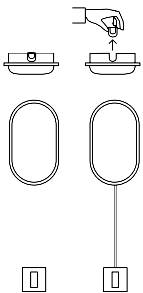

Doppio sistema di installazione / Double installation system

EXTRA



outdoor
use



accommodation
areas use



urban
areas use



Materiale

PP + PC

Colore

bianco
antracite



Temperatura colore

4000K



Driver

integrato

Material

PP + PC

Colour

white
anthracite



Colour temperature

4000K




Driver


built-in

Plafoniera LED integrato materiale base PP bianco con diffusore bianco PC adatte ad installazione con impianto canaline esterne.


Ceiling LED integrated white PP base material with white PC diffuser fit for surface mount cable ducts connections.



	colour temp.	colour
LED-EXTRA-BCO 8031440361071 lumen		
	1100 lm	
LED-EXTRA-ANT 8031440361064 lumen		
	1100 lm	
watt	10W	
beam angle	120°	

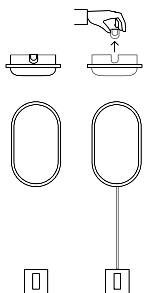

Doppio sistema di installazione /
Double installation system

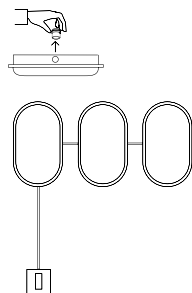

Adatte ad installazione con impianto canaline esterne /
Surface mount cable ducts connections

SHELLY



outdoor
use



accommodation
areas use



urban
areas use





Materiale

PC + PC

Colore

bianco
antracite



Temperatura colore

4000K



Driver

integrato

Material

PC + PC

Colour

white
anthracite



Colour temperature

4000K



Driver

built-in



Plafoniera LED integrato con sensore, base in policarbonato bianco o antracite diffusore in policarbonato bianco.

Polycarbonate built-in LED ceiling lamp with sensor in white or anthracite colour with white PC diffuser.




Accessori inclusi / Included accessories

Sensore di movimento regolabile / Adjustable motion sensor



	colour temp.	colour
LED-SHELLY-Q-MW BCO 8031414862153		
lumen	2500 lm	
LED-SHELLY-Q-MW ANT 8031414862177		
lumen	2500 lm	
watt	20W	
beam angle	120°	



Doppio sistema di installazione / Double installation system

SHELLY

Materiale

PC + PC

Colore

bianco
antracite



Temperatura colore

3000K / 4000K



Driver

integrato

Material

PC + PC

Colour

white
anthracite



Colour temperature

3000K / 4000K



Driver

built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite diffusore in policarbonato bianco.

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.



LED-SHELLY-Q-S BCO

8031414085507

lumen



1900 lm



LED-SHELLY-Q-S ANT

8031414862009

lumen



1900 lm



LED-SHELLY-Q-L BCO

8031414862016

lumen



2500 lm



LED-SHELLY-Q-L ANT

8031414862023

lumen






2500 lm



watt	15W
beam angle	120°

watt	20W
beam angle	120°



Doppio sistema di installazione /
Double installation system



Materiale

PC + PC

Colore

bianco
antracite



Temperatura colore

3000K / 4000K



Driver

integrato

Material

PC + PC

Colour

white
anthracite



Colour temperature

3000K / 4000K



Driver

built-in




Plafoniera LED integrato, base in policarbonato bianco o antracite diffusore in policarbonato bianco.

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.



	colour temp.	colour
LED-SHELLY-S BCO 8031440351720 lumen		
	1900 lm	
LED-SHELLY-S ANT 8031440351706 lumen		
	1900 lm	
watt	15W	
beam angle	120°	

	colour temp.	colour
LED-SHELLY-L BCO 8031440351713 lumen		
	2500 lm	
LED-SHELLY-L ANT 8031440351690 lumen		
	2500 lm	
watt	20W	
beam angle	120°	



Doppio sistema di installazione / Double installation system

EVER



Materiale

PC + PC

Colore

bianco
antracite



Temperatura colore

3000K / 4000K



Driver

integrato

Material

PC + PC

Colour

white
anthracite



Colour temperature

3000K / 4000K



Driver

built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite, diffusore in policarbonato bianco.

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.






	colour temp.	colour
LED-EVER-Q-S BCO 8031414862238 lumen		
	1900 lm	
LED-EVER-Q-S ANT 8031414862269 lumen		
	1900 lm	

	colour temp.	colour
LED-EVER-Q-L BCO 8031414862276 lumen		
	3420	
LED-EVER-Q-L ANT 8031414862283 lumen		
	3420	

watt	15W
beam angle	120°
pf	-

watt	28W
beam angle	120°
pf	0.90



Doppio sistema di installazione / Double installation system

Materiale

PC + PC

Colore

bianco
antracite



Temperatura colore

3000K / 4000K



Driver

integrato

Material

PC + PC

Colour

white
anthracite



Colour temperature

3000K / 4000K



Driver

built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite, diffusore in policarbonato bianco.

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.



LED-EVER-LP BCO

8031440355650

lumen

colour temp. colour




2500 lm

LED-EVER-LP ANT

8031440355643

lumen



2500 lm

LED-EVER-XLP BCO

8031440355636

lumen

colour temp. colour



3750 lm

LED-EVER-XLP ANT

8031440355629




lumen



3750 lm

watt	20W
beam angle	120°
pf	-

watt	28W
beam angle	120°
pf	0.90



Doppio sistema di installazione /
Double installation system



Materiale

PC + PC

Colore

bianco
antracite



Temperatura colore

3000K / 4000K



Driver

integrato

Material

PC + PC

Colour

white
anthracite



Colour temperature

3000K / 4000K





Driver

built-in

Plafoniera LED integrato, base in policarbonato bianco o antracite, diffusore in policarbonato bianco.

Polycarbonate built-in LED ceiling lamp in white or anthracite colour with white PC diffuser.


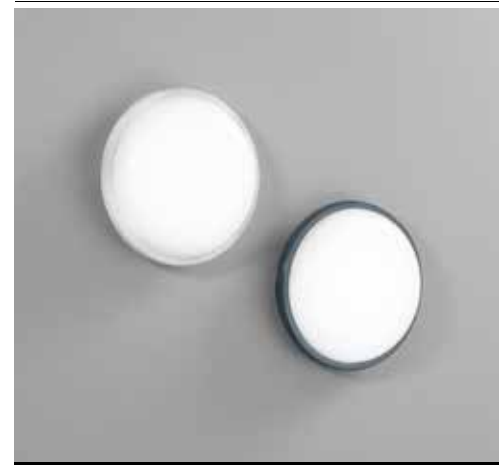
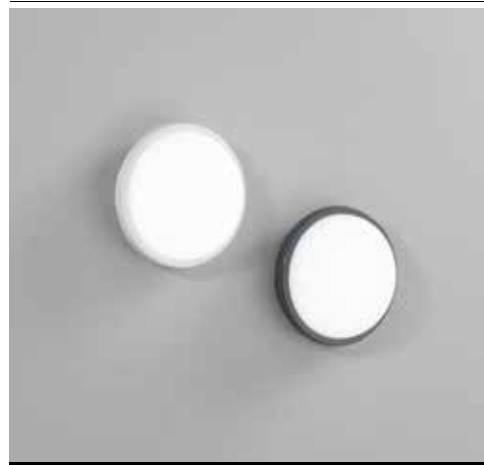


	colour temp.	colour
LED-EVER-S BCO 8031440351683 lumen		
	1900 lm	
LED-EVER-S ANT 8031440351638 lumen		
	1900 lm	

	colour temp.	colour
LED-EVER-L BCO 8031440351676 lumen		
	2500 lm	
LED-EVER-L ANT 8031440351645 lumen		
	2500 lm	

watt	15W
beam angle	120°
pf	-

watt	20W
beam angle	120°
pf	0.90



Doppio sistema di installazione /
Double installation system

EVER



outdoor
use



accommodation
areas use



urban
areas use



Materiale
PC + PC

Colore
bianco
silver



Temperatura colore
3000K / 4000K



Driver
integrato

Material
PC + PC

Colour
white
silver




Colour temperature
3000K / 4000K



Driver
built-in


Plafoniera LED integrato, base policarbonato bianco o silver con diffusore in policarbonato bianco.

Polycarbonate built-in LED ceiling lamp PC base white or silver with white PC diffuser.

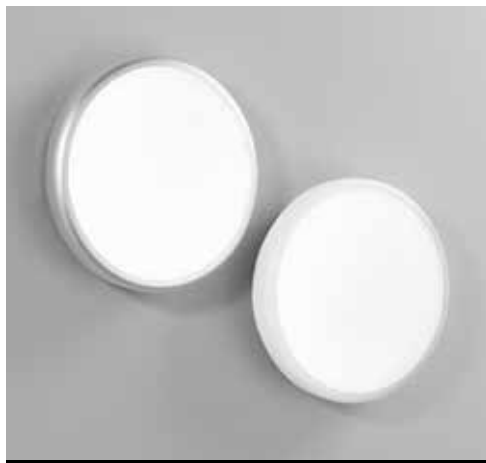

	colour temp.	colour
LED-EVER-XL BCO 8031440355612 lumen		
	3750 lm	
LED-EVER-XL SIL 8031440355605 lumen		
	3750 lm	

watt	28W
beam angle	120°
pf	0.90



Materiale
PC + PC

Colore
bianco
silver



Temperatura colore
4000K



Driver
integrato

Material
PC + PC

Colour
white
silver




Colour temperature
4000K



Driver
built-in



Plafoniera con sensore di movimento microwave, base in policarbonato, diffusore in policarbonato bianco.

Ceiling lamp with microwave sensor in polycarbonate ceiling with white PC diffuser.

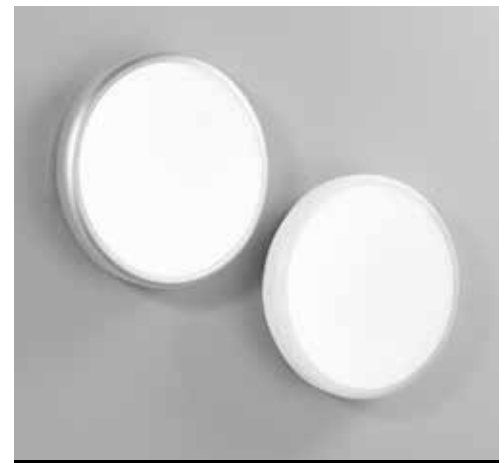


	colour temp.	colour
LED-EVER-XL-MW BCO 8031414862375 lumen		
	3750 lm	
LED-EVER-XL-MW SIL 8031414862610 lumen		
	3750 lm	

watt	28W
beam angle	120°
pf	0.90




Doppio sistema di installazione / Double installation system



Doppio sistema di installazione / Double installation system

Accessori inclusi / Included accessories

Sensore di movimento regolabile / Adjustable motion sensor



FLIPPY





Materiale

PC

Colore

bianco



Temperatura colore

3000K / 4000K



Driver

integrato

Material

white PC

Colour

white



Colour temperature

3000K / 4000K




Driver

built-in

Plafoniera con base in policarbonato, diffusore in policarbonato bianco.

Ceiling lamp with polycarbonate ceiling with white PC diffuser.



	colour temp.	colour
LED-FLIPPY-12C		
8031414922024		
lumen	1160 lm	
watt		12W
beam angle		120°

LED-FLIPPY-12M		
8031414922031		
lumen	1160 lm	
watt		12W
beam angle		120°

SPEEDY





Materiale

PC

Colore

bianco



Temperatura colore

3000K / 4000K



Driver

integrato

Material

PC

Colour

white



Colour temperature

3000K / 4000K




Driver

built-in

Plafoniera con base in policarbonato, diffusore in policarbonato bianco.

Ceiling lamp with polycarbonate ceiling with white PC diffuser.



LED-SPEEDY-18C

8031414922000

lumen

colour temp.	colour
1800 lm	

watt	18W
beam angle	120°

LED-SPEEDY-18M

8031414922017


lumen

colour temp.	colour
1800 lm	

watt	18W
beam angle	120°

TURTLE





Plafoniera bianca o nera con struttura in termoplastica e diffusore in vetro. Disponibile in forma circolare o ovale.

White or black ceiling lamp with thermoplastic frame and glass diffuser. Available in circular or oval shape.



I-TURTLE-AP-BCO

8031414918577


I-TURTLE-AP-NER

8031414918560

colour



1 x E27



I-TURTLE-PL-BCO

8031414918553


I-TURTLE-PL-NER

8031414918546

colour



1 x E27



Lampadina non inclusa / Light bulb not included

PICNIC COLOR



Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di spina schuko e connettore modulare.

Light string E12 PVC cable inclusive of schuko plug and modular connector.



colour

Accessori inclusi /
Included accessories

I-PICNIC-COLOR
8031414891863




25 x E12 MAX 20W



Lampadina E12
E12 light bulb


7 rosse/red
6 gialle/yellow
6 verdi/green
6 blu/blue

watt	0,3W
volt	230V



END-TO-END



easy connection / max 1000W

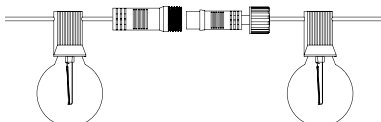

PICNIC

Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di spina schuko e connettore modulare.

Light string E12 PVC cable inclusive of schuko plug and modular connector.

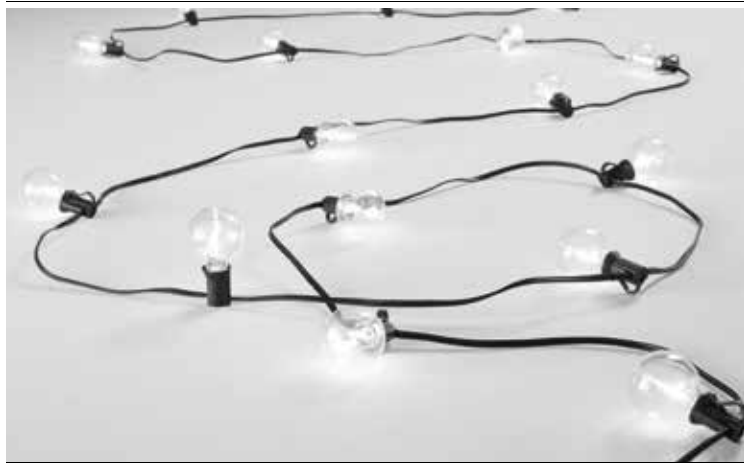

colour | Accessori inclusi / Included accessories

I-PICNIC-LED
8031414884407




Lampadina E12
E12 light bulb

watt 0,3W
volt 230V

3000K



25 x E12 MAX 20W



Stringa elettrificata E12 per esterno con cavo in PVC inclusiva di pannello solare.

Light string E12 PVC cable inclusive solar panel.



colour | Accessori inclusi / Included accessories

I-PICNIC-SOLAR
8031414884414




Lampadina E12
E12 light bulb

watt 0,3W
volt 3V


3000K



25 x E12 MAX 20W




3.7V 2200mAh
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable



END-TO-END

easy connection / max 1000W

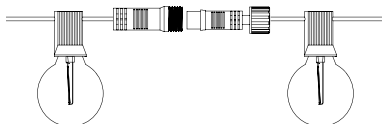

Stringa elettrificata E14 o E27 per esterno con cavo in gomma inclusiva di spina schuko e connettore modulabile.

Light string E14 or E27 for outdoor rubber cable inclusive of schuko plug and modular connector.



colour

I-PICNIC-E27-BCO

8031414043064



I-PICNIC-E27


8031414862719



10 x E27 MAX 25W




Lampadina non inclusa / Light bulb not included

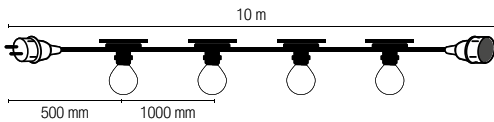

END-TO-END

easy connection / max 1000W

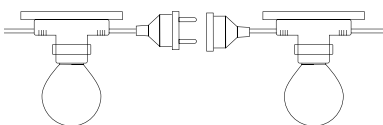

colour

I-PICNIC-E14-BCO

8031414023745



I-PICNIC-E14


8031414862726



10 x E14 MAX 25W




Lampadina non inclusa / Light bulb not included

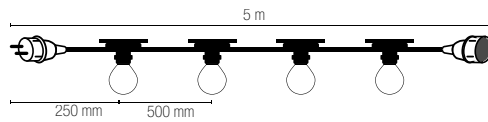

END-TO-END

easy connection / max 1000W

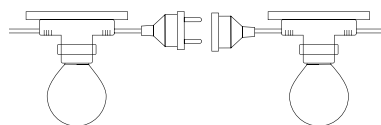

PICNIC RGB

Stringa luminosa LED per esterno con cavo in PVC, inclusa spina schuko e connettore modulabile.

Telecomando per gestire il colore RGB.

Outdoor LED light string with PVC cable, including schuko plug and modular connector.

Remote control to manage RGB color.



Materiale

PC + PVC

Colore

nero



Temperatura colore

RGB



Driver

integrato

Material

PC + PVC

Colour

black




Colour temperature

RGB



Driver

built-in



I-PICNIC-LED-RGB

8031414921911

colour temp.




RGB

colour



watt

10W



END-TO-END

easy connection / max 1000W



PICNIC INT



Stringa elettrificata a LED per esterno con cavo in PVC inclusiva di spina schuko e connettore modulabile.

LED light string with PVC cable inclusive of schuko plug and modular connector.

Materiale

PC + PVC


Colore

nero



Temperatura colore

RGB + CCT



Driver

integrato

Material

PC + PVC


Colour

black



Colour temperature

RGB + CCT




Driver

built-in




I-PICNIC-INT
8031414884391
lumen




400 lm

watt	10 x 0,5W
beam angle	110°

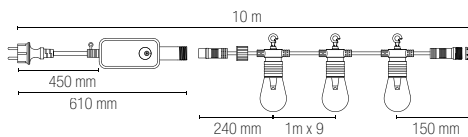

END-TO-END

easy connection / max 1000W

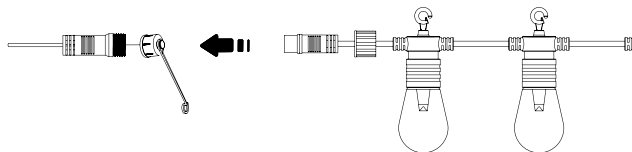


Control system easy installation




In.tec light OUTDOOR PLAFONIERE / CEILING LAMPS

OUTDOOR

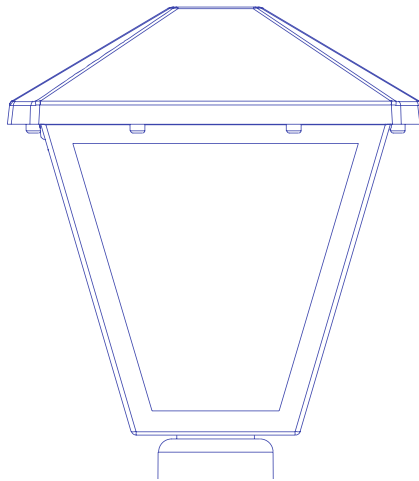

APPLIQUE SOSPENSIONI E PALETTI CORRELATI
WALL SUSPENSION AND FLOOR LAMPS COMBINED



POLLY





In.tec light **OUTDOOR** APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

POLLY

Collezione con base in fibre di plastica e sfere
in PMMA nei colori trasparente, bianco o fumè.

Collection with base in plastic fibers and spheres
in PMMA in transparent, white or smoked colors.




I-POLLY-G20-TR180
8031414921973

colour



1 x E27 MAX 20W




I-POLLY-G25-TR180
8031414921980

colour



1 x E27 MAX 20W




I-POLLY-G30-TR180
8031414921997


colour





1 x E27 MAX 20W




Lampadina
non inclusa /
Light bulb
not included

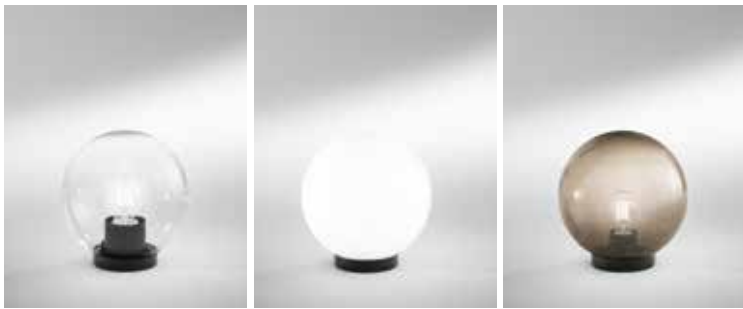



	colour
I-POLLY-G20-TR 8031414889136	
I-POLLY-G20-BCO 8031414889112	
I-POLLY-G20-GR 8031414889129	
1 x E27 MAX 20W	

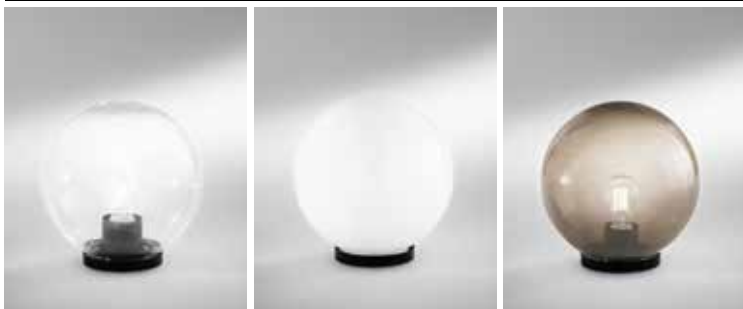


	colour
I-POLLY-G25-TR 8031414889167	
I-POLLY-G25-BCO 8031414889143	
I-POLLY-G25-GR 8031414889150	
1 x E27 MAX 20W	



	colour
I-POLLY-G30-TR 8031414889198	
I-POLLY-G30-BCO 8031414889174	
I-POLLY-G30-GR 8031414889181	
1 x E27 MAX 20W	

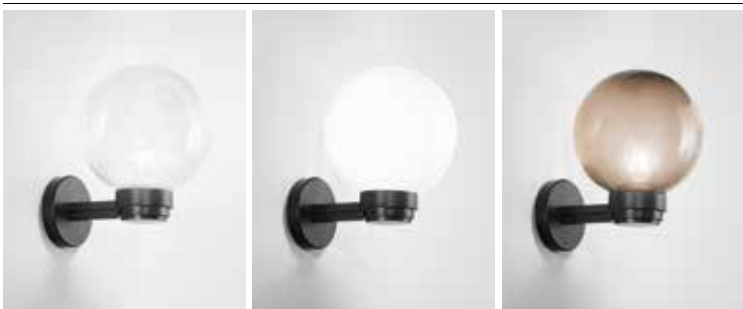

	colour
I-POLLY-AP-TR 8031414889105	
I-POLLY-AP-BCO 8031414889389	
I-POLLY-AP-GR 8031414889099	
1 x E27 MAX 20W	



POLLY






I-POLLY-PD
8031414921942

Accessorio per sospensione con cavo in gomma e connettore / Suspension accessory with rubber cable


colour



I-POLLY-SPK
8031414921959

Accessorio per fissaggio a picchetto con connettore e fermacavo / Accessory for peg fixing with connector and cable holder


colour




I-POLLY-SPK-S
8031414921966

Accessorio per fissaggio a picchetto con cavo in gomma e presa schuko / Accessory for peg fixing with rubber cable and schuko socket

colour



Accessori inclusi / Included accessories



Cavo 2,5 m con spina schuko / 2,5 m of cable with schuko plug




POLLY







	colour
I-POLLY-TUBE100 8031414890149	●
I-POLLY-TUBE150 8031414890156	●
I-POLLY-TUBE200 8031414890163	●

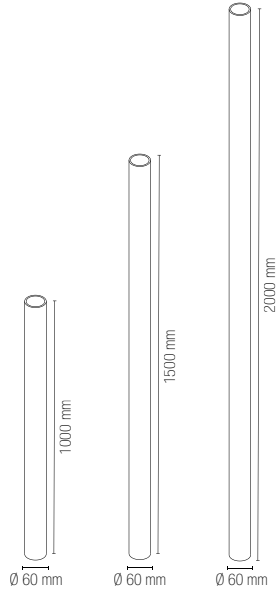


I-POLLY-BASE
8031414889235



I-POLLY-JOINT
8031414890170



I-POLLY-BASE-AP
8031414904587



WAMI

Collezione a LED integrato in alluminio pressofuso nei colori antracite o corten goffrato con temperatura colore selezionabile.

Integrated LED collection in die-cast aluminum in anthracite or corten embossed colors with selectable color temperature.



Materiale

alluminio

Colore

goffrato antracite
goffrato corten



Temperatura colore selezionabile

3000K / 4000K



Driver

integrato

Material

aluminum

Colour

embossed anthracite
embossed corten



Selectable color temperature

3000K / 4000K



Driver


built-in





technical information

WAMI

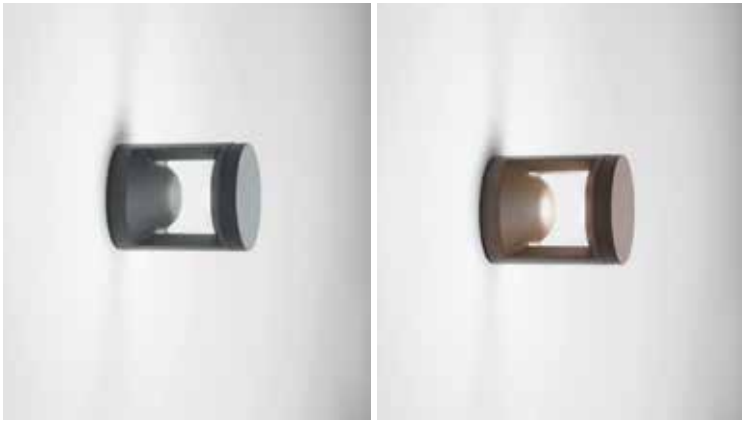

LED-WAMI-AP-ANT
8031414890026


lumen 1530 lm

LED-WAMI-AP-BRO
8031414890057

lumen 1530 lm

watt 12W
beam angle 120°

colour temp.	colour



LED-WAMI-P25-ANT
8031414890033


lumen 1530 lm

LED-WAMI-P25-BRO
8031414890064

lumen 1530 lm

watt 12W
beam angle 120°

colour temp.	colour



LED-WAMI-P80-ANT
8031414890040


lumen 1530 lm

LED-WAMI-P80-BRO
8031414890071

lumen 1530 lm

watt 12W
beam angle 120°

colour temp.	colour

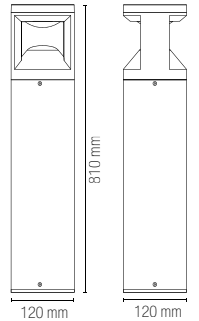


In.tec light

OUTDOOR APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

SAIL

Collezione in alluminio a LED integrato con finitura bianco o antracite goffrato.
Aluminum collection LED lamp white or anthracite embossed finish.

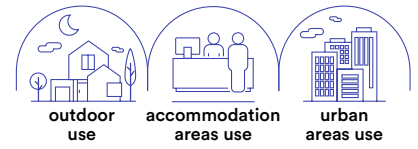

Materiale
alluminio

Colore
goffrato bianco
goffrato antracite



Temperatura colore
3000K / 4000K



Driver
integrato

Material
aluminum

Colour
embossed white
embossed anthracite



Colour temperature
3000K / 4000K




Driver
built-in







	colour temp.	colour
LED-SAIL-AP-BCO 8031414918614 lumen		
LED-SAIL-AP-ANT 8031414920174 lumen		
watt	12W	
beam angle	180°	



	colour temp.	colour
LED-SAIL-APS-BCO 8031414920181 lumen		
LED-SAIL-APS-ANT 8031414918621 lumen		
watt	12W	
beam angle	180°	




Accessori inclusi / Included accessories



Sensore di movimento regolabile distanza max 6m 120° / Adjustable motion sensor max distance 6m 120°



	colour temp.	colour
LED-SAIL-P90-BCO 8031414918638 lumen		
LED-SAIL-P90-ANT 8031414918645 lumen		
watt	12W	
beam angle	180°	

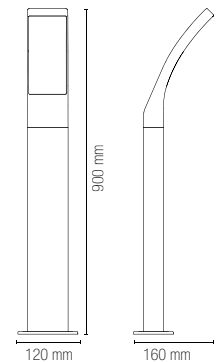

DISCOVERY

Collezione a LED integrato in alluminio con finitura antracite goffrato.
Aluminum collection LED lamp anthracite embossed finish.





DISCOVERY



Materiale

alluminio

Colore

goffrato antracite



Temperatura colore

4000K



Driver

integrato

Material

aluminum

Colour

embossed anthracite



Colour temperature

4000K



Driver

built-in



LED-DISCOVERY-AP

8031414877836

lumen

colour temp.



1440 lm

colour




watt

13W

beam angle

360°



LED-DISCOVERY-P65

8031414877850

lumen

colour temp.



1440 lm

colour




watt

13W

beam angle

360°

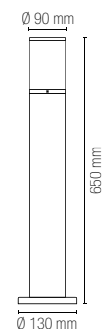

LED-DISCOVERY-HUB

8031414877867

lumen

colour temp.



1440 lm

colour



watt


13W

beam angle

360°



Plug 2X max 15A 250V 2500W

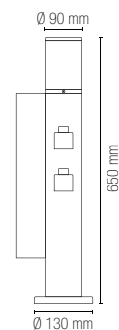

IDEM

Lampada in alluminio a LED integrato finitura antracite goffrato.
Aluminum collection anthracite colour built-in LED.



Materiale

alluminio

Colore

goffrato antracite



Temperatura colore

4000K



Driver

integrato

Material

aluminum

Colour

embossed anthracite



Colour temperature


4000K





Driver

built-in


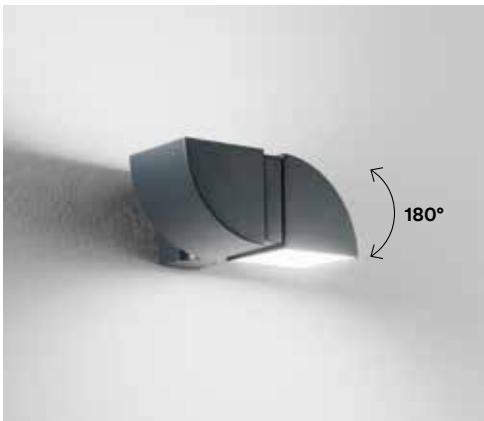






LED-IDEM-AP
8031414883103
lumen

colour temp.	colour
	
840 lm	

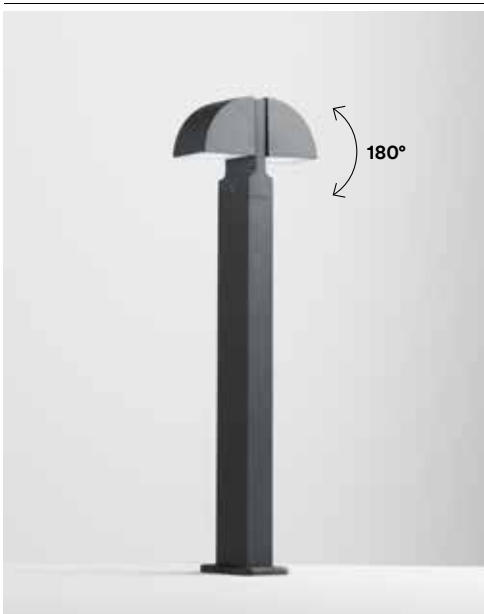
watt	8W
beam angle	120°



LED-IDEM-P1
8031414883110
lumen

colour temp.	colour
	
840 lm	

watt	8W
beam angle	120°

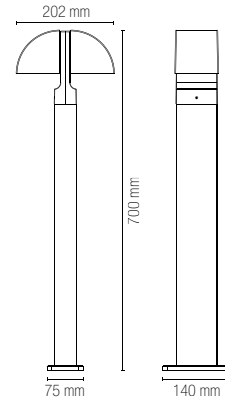

REVERSE

Lampada in alluminio a LED integrato finitura antracite goffrato.
Aluminum collection anthracite colour built-in LED.



Materiale
alluminio

Colore
goffrato antracite



Temperatura colore
4000K



Driver
integrato

Material
aluminum


Colour
embossed anthracite




Colour temperature
4000K



Driver
built-in

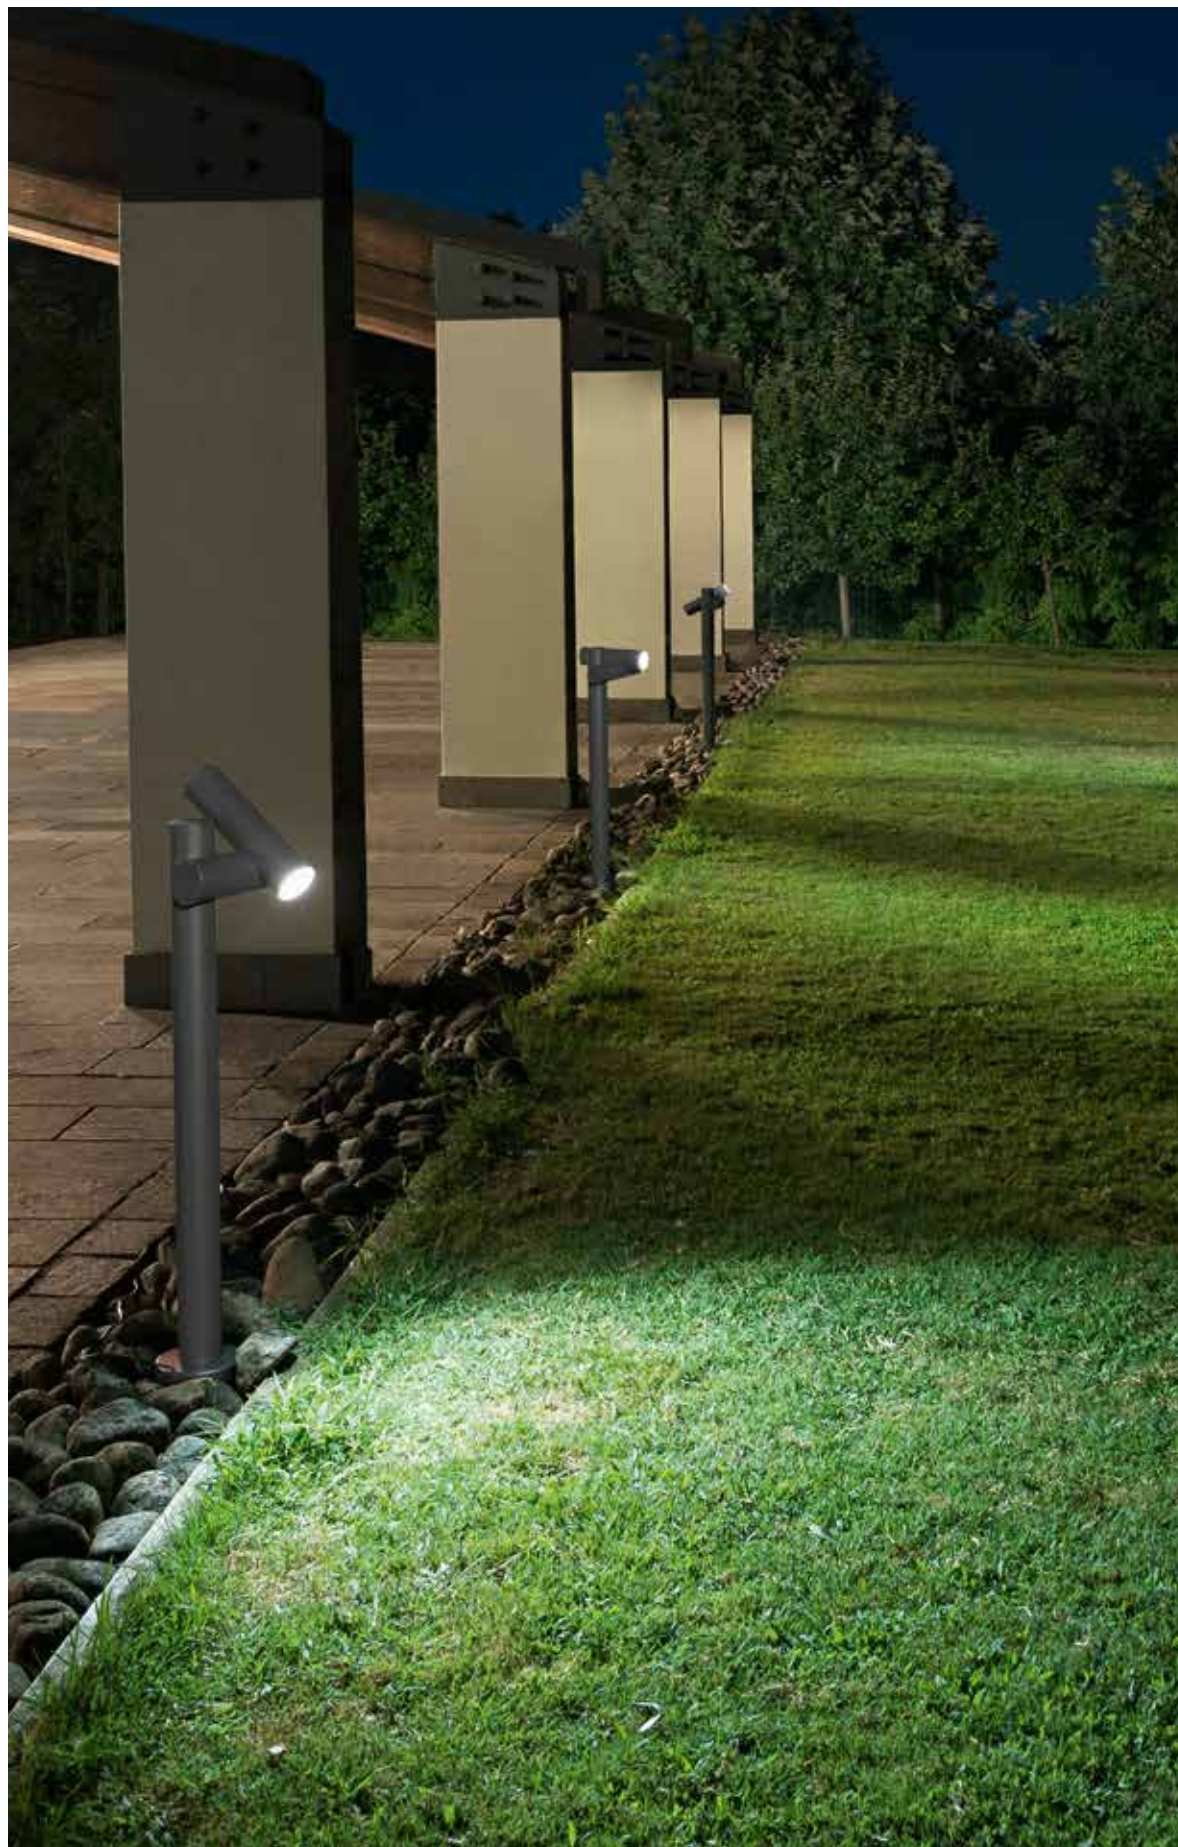

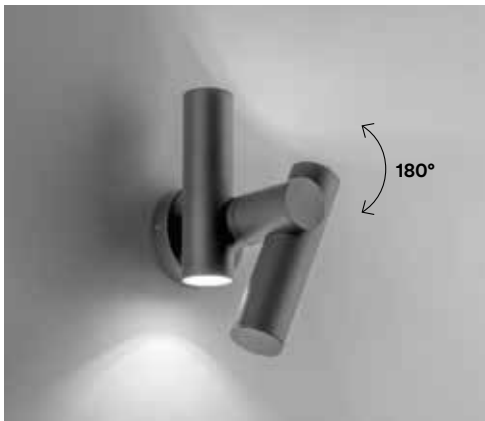

LED-REVERSE-AP

8031414883127

lumen

colour temp.	colour


620 lm

watt

7,5W

beam angle

120°



LED-REVERSE-P1

8031414883134

lumen

colour temp.	colour


460 lm

watt

5,3W

beam angle

120°

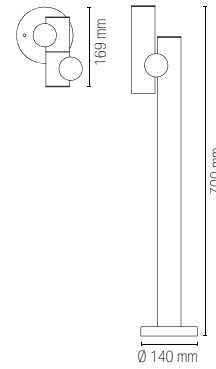

SINTESI

Lampada in alluminio a LED integrato con finitura bianco o nero goffrato.
Built in aluminum LED lamp white or black embossed finish.



Materiale
alluminio

Colore
goffrato bianco
goffrato nero



Temperatura colore
4000K



Driver
integrato

Material
aluminum

Colour
embossed white
embossed black



Colour temperature
4000K




Driver
built-in





	colour temp.	colour
LED-SINTESI-AP BCO 8031414862207		
lumen	400 lm	
LED-SINTESI-AP NERO 8031414862221		
lumen	400 lm	
watt	6W	
beam angle	100°	



	colour temp.	colour
LED-SINTESI-P BCO 8031414862245		
lumen	400 lm	
LED-SINTESI-P NERO 8031414862252		
lumen	400 lm	
watt	6W	
beam angle	100°	



ALYSON

Lampada in alluminio pressofuso a LED integrato nei colori nero o bianco gofrato con diffusore il policarbonato.

Built in aluminum LED lamp white or black embossed finish with PC diffuser.



Materiale
alluminio

Colore
gofrato bianco
gofrato nero



Temperatura colore

4000K



Driver
integrato

Material
aluminum

Colour
embossed white
embossed black



Colour temperature


4000K




Driver
built-in



	colour temp.	colour
LANT-ALYSON/AP BCO 8031440361514		
lumen	1300 lm	
LANT-ALYSON/AP 8031440361552		
lumen	1300 lm	
watt	12W	
beam angle	120°	




	colour temp.	colour
LANT-ALYSON/P1 BCO 8031440361538		
lumen	1300 lm	
LANT-ALYSON/P1 8031440361569		
lumen	1300 lm	
watt	12W	
beam angle	120°	

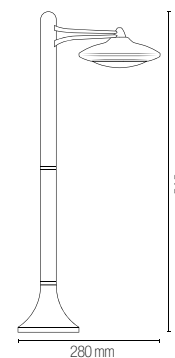

BITT

Lampada in alluminio a LED integrato finitura antracite e corten goffrato.
Aluminum collection anthracite and corten colour built-in LED.

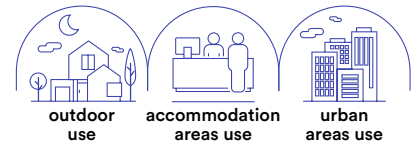

Materiale
alluminio

Colore
goffrato antracite
goffrato corten



Temperatura colore selezionabile
3000K / 4000K



Driver
integrato

Material
aluminum

Colour
embossed anthracite
embossed corten



Selectable color temperature
3000K / 4000K




Driver
built-in






	colour temp.	colour
LED-BITT-P28-ANT 8031414883011		
lumen	1200 lm	
LED-BITT-P28-BRO 8031414883028		
lumen	1284 lm	
watt	10W	
beam angle	120°	




	colour temp.	colour
LED-BITT-P76-ANT 8031414883035		
lumen	1200 lm	
LED-BITT-P76-BRO 8031414883042		
lumen	1284 lm	
watt	10W	
beam angle	120°	

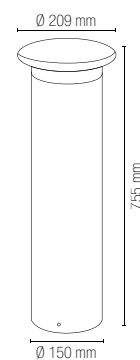

NISMO

Collezione in alluminio a LED integrato finitura bianco goffrato.
Aluminum collection LED lamp white embossed finish.



Materiale
alluminio

Colore
goffrato bianco



Temperatura colore selezionabile
3000K / 4000K



Driver
integrato

Material
aluminum

Colour
embossed white



Selectable color temperature
3000K / 4000K



Driver
built-in



LED-NISMO-AP

8031440361224

lumen

colour temp. | colour




1430 lm

watt

12W

beam angle

120°



LED-NISMO-P60

8031440361231

lumen

colour temp. | colour




1430 lm

watt

12W

beam angle

120°






In.tec light

OUTDOOR APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED



STATION

Collezione in acciaio finitura antracite.
 Diffusore in policarbonato bianco.
 Stainless steel collection anthracite finish.
 White PC diffuser.



colour

I-STATION-E27-SC2
 8031414879571



colour

I-STATION-SC2
 8031414879564



Lampadina non inclusa /
 Light bulb not included



1 x E27 MAX 60W



Plug 2X max 15A 250V 2500W





Plug 2X max 15A 250V 2500W



In.tec light **OUTDOOR** APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

UNDERWOOD

Collezione in metallo finitura antracite o corten.
Metal collection anthracite or corten finish.

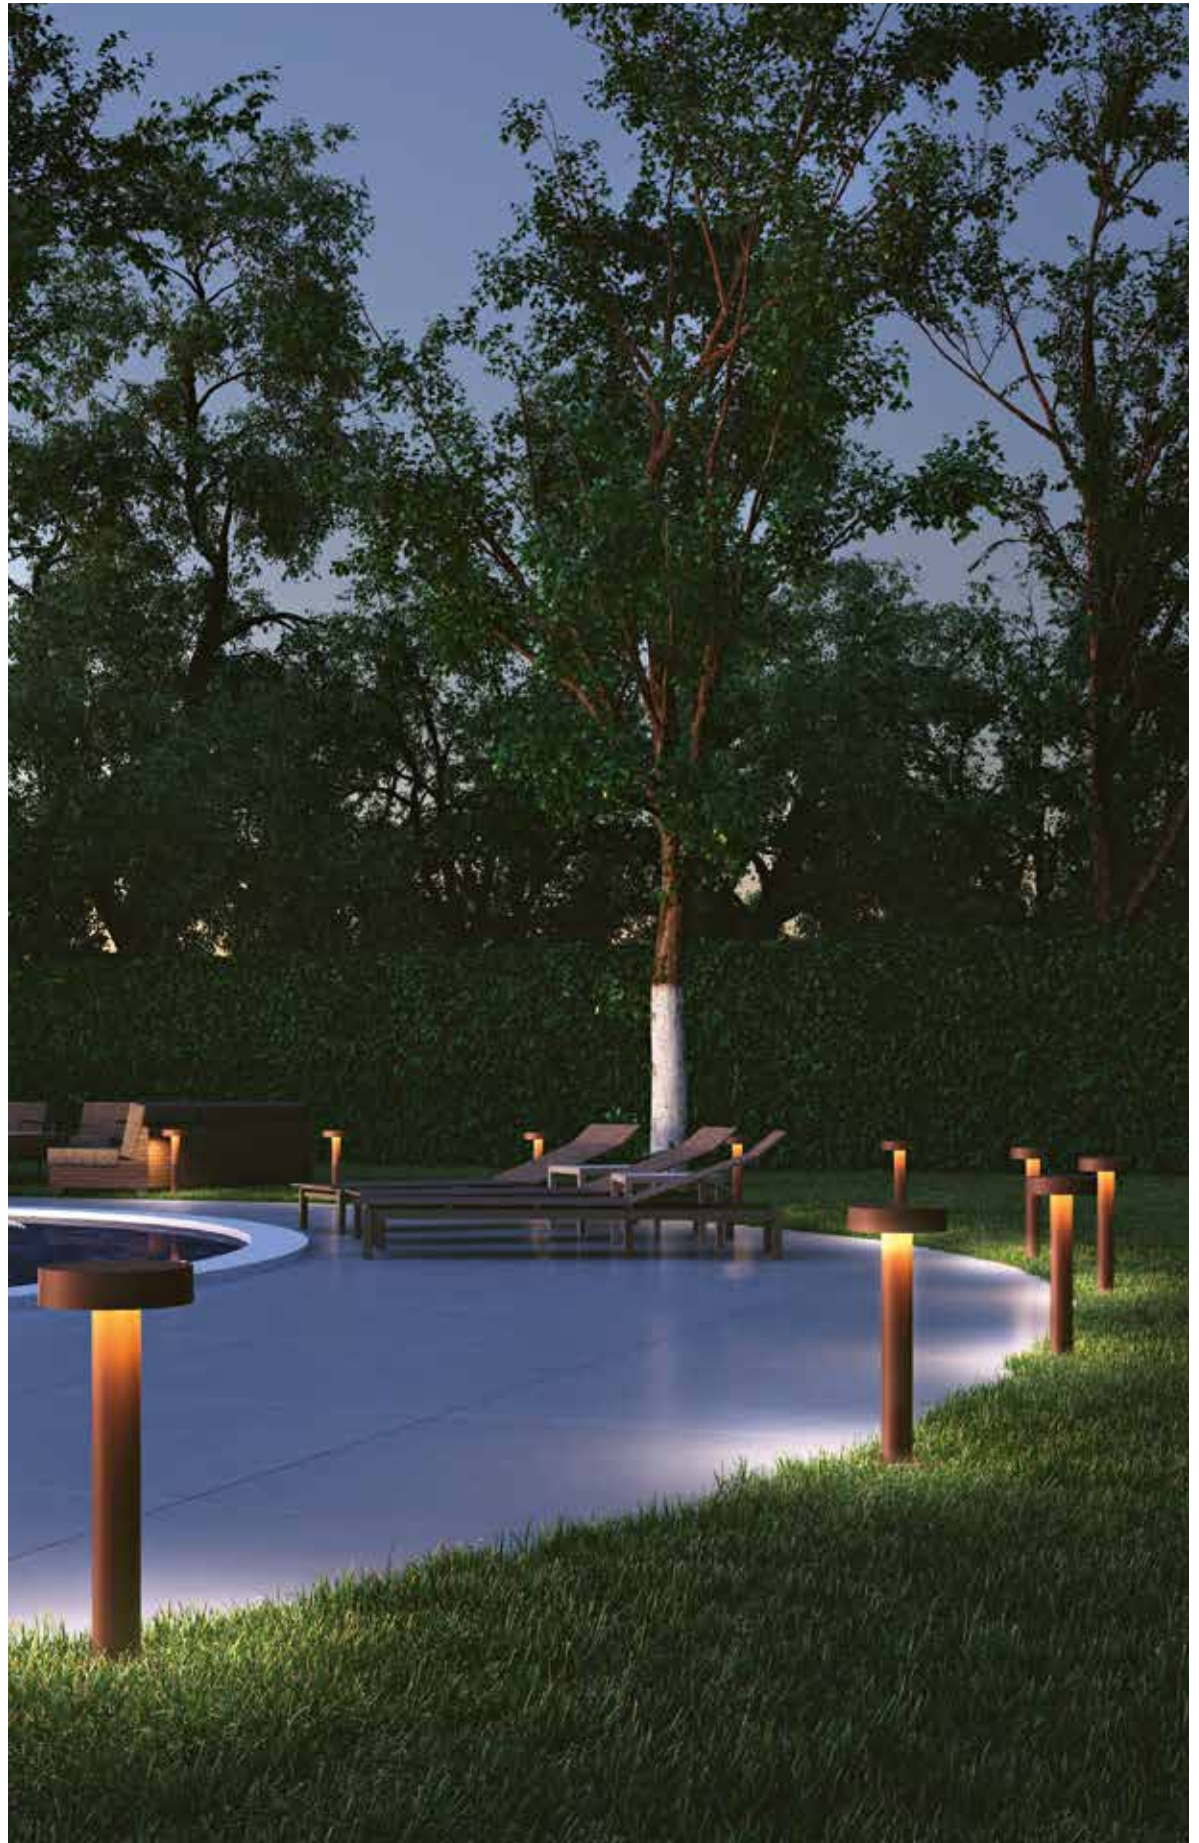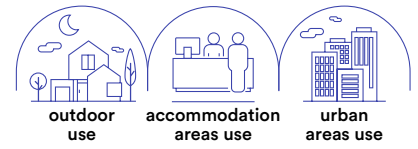



I-UNDERWOOD-P70-ANT 8031414883059	●
I-UNDERWOOD-P70-BRO 8031414883066	●


colour

4 x G9 LED

10W



Lampadina non inclusa /
Light bulb not included

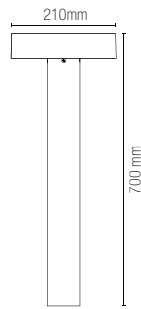

FOCUS

Collezione a LED in policarbonato nei colori bianco e nero.
LED polycarbonate collection in black and white colors.





I-FOCUS-R-AP-BCO


8031414916290

I-FOCUS-R-AP-NER

8031414916283

1 x GU10 MAX 35W

colour



Connettore IP65 incluso /
IP65 connector included



Lampadina non inclusa /
Light bulb not included



I-FOCUS-Q-AP-BCO


8031414916313

I-FOCUS-Q-AP-NER

8031414916306

1 x GU10 MAX 35W

colour



Connettore IP65 incluso /
IP65 connector included



Lampadina non inclusa /
Light bulb not included



I-FOCUS-R-P-BCO


8031414916252

I-FOCUS-R-P-NER

8031414916245

1 x GU10 MAX 35W

colour



Connettore IP65 incluso /
IP65 connector included



Picchetto per installazione
nel terreno incluso /
Picchetto per installazione
nel terreno non incluso /



Lampadina non inclusa /
Light bulb not included



I-FOCUS-Q-P-BCO


8031414916276

I-FOCUS-Q-P-NER

8031414916269

1 x GU10 MAX 35W

colour



Connettore IP65 incluso /
IP65 connector included




Picchetto per installazione
nel terreno incluso /
Picchetto per installazione
nel terreno non incluso /



Lampadina non inclusa /
Light bulb not included

DARK

Collezione in acciaio inox con diffusore in policarbonato. Disponibile in antracite.
Stainless steel collection with polycarbonate diffuser. Available in anthracite.

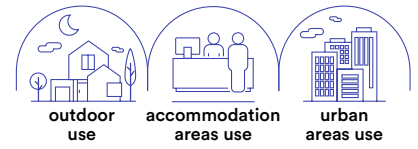


colour

I-DARK-AP1
8031414918775




1 x E27 MAX 25W




I-DARK-AP1-S
8031414919093



1 x E27 MAX 25W



Accessori inclusi / Included accessories



max 10m
100°


Sensore di movimento regolabile
distanza max 10m 100° /
Adjustable motion sensor
max distance 10m 100°



colour

I-DARK-AP2
8031414919109


2 x E27 MAX 25W



colour

I-DARK-APV
8031414919116


1 x E27 MAX 25W



colour

I-DARK-P1
8031414918782

1 x E27 MAX 25W

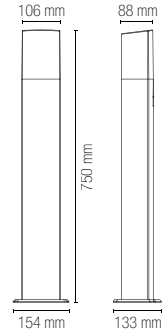

Lampadina non inclusa /
Light bulb not included

TOKYO


Collezione in acciaio inox con diffusore in policarbonato.
Finiture bianco, bronzo, nikel spazzolato e grigio antracite.

Stainless steel collection with polycarbonate diffuser.
White, bronze, brushed nickel and anthracite grey finishes.





TOKYO



I-TOKYO-AP BCO

8031414864447

I-TOKYO-AP ANT

8031414888795

I-ST021

8031421451081

I-TOKYO-AP BRO

8031414864423

colour



Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included

1 x E27 MAX 40W



I-TOKYO-P BCO

8031414864416



I-TOKYO-P ANT

8031414888801



I-ST022-1100

8031421661084



I-TOKYO-P BRO

8031414864393




1 x E27 MAX 40W



Lampadina consigliata / Suggested light bulb



Lampadina non inclusa / Light bulb not included

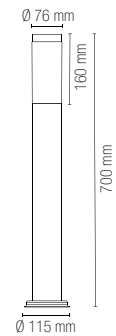

I-TOKYO-P70 BCO

8031414875320



I-TOKYO-P70 ANT

8031414888818



I-ST022-700

8031414877225



I-TOKYO-P70 BRO

8031414871780



1 x E27 MAX 40W



Lampadina consigliata / Suggested light bulb



Lampadina non inclusa / Light bulb not included

WAX

Collezione in alluminio a LED integrato con finitura antracite.
Aluminum collection LED lamp with embossed anthracite finish.



Materiale
alluminio

Colore
goffrato antracite



Temperatura colore
3000K



Driver
DC24V
tensione costante
non incluso

Material
aluminum

Colour
goffrato antracite



Colour temperature
3000K






Driver
DC24V
constant voltage
not included



Driver p. 843-852
Controller p. 854-857



	colour temp.	colour
LED-WAX-P120 8031414922956 lumen		
	363lm	
watt	3W	
beam angle	120°	
pf	0.90	

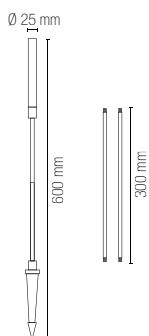


Picchetto per installazione
nel terreno incluso /
Picchetto per installazione
nel terreno non incluso /



In.tec light **OUTDOOR** APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

PUCK

Collezione in alluminio a LED integrato con finitura antracite o corten goffrato.
Aluminum collection with integrated LED with anthracite or corten embossed finish.



Materiale
alluminio

Colore
goffrato antracite
goffrato corten



Temperatura colore
3000K



Driver
DC24V
tensione costante
non incluso

Material
aluminum


Colour
goffrato antracite
goffrato corten




Colour temperature
3000K



Driver
DC24V
constant voltage
not included



	colour temp.	colour
LED-PUCK-P120-ANT 8031414918652 lumen		
LED-PUCK-P120-BRO 8031414918669 lumen		
watt	3W	
beam angle	180°	

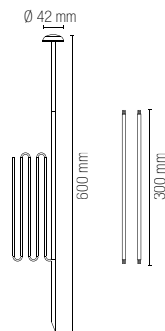



In.tec light **OUTDOOR** APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

DROP

Collezione in alluminio finitura antracite con diffusore in policarbonato.
Aluminum collection anthracite finish with PC diffuser.






I-DROP-P33-ANT
8031414883073

colour



1 x G9 LED



Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included




I-DROP-P53-ANT
8031414883080

colour



1 x G9 LED

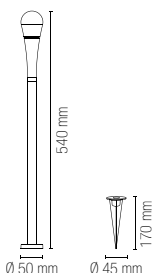

Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included




I-DROP-P73-ANT
8031414882793

colour



1 x G9 LED

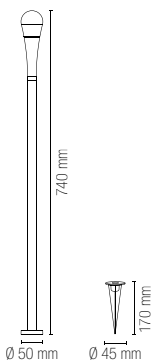



Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included

BOOSTER


Collezione in metallo finitura silver.
Metal collection silver finish.

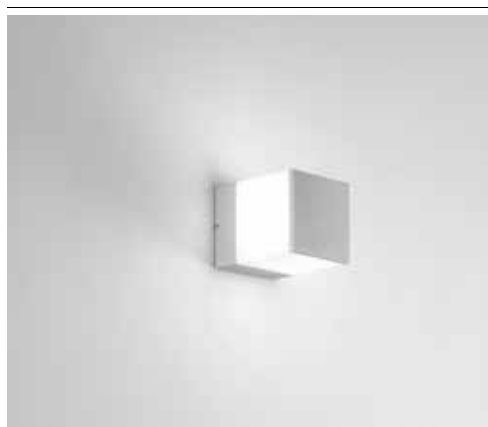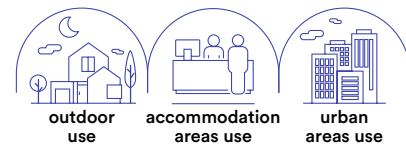

I-BOOSTER-AP
8031414918492

1 x E27 MAX 40W

colour




Lampadina non inclusa /
Light bulb not included



I-BOOSTER-P60
8031414918508

1 x E27 MAX 40W

colour

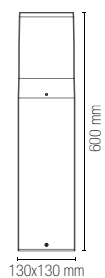

Lampadina non inclusa /
Light bulb not included



technical information **BOOSTER**



In .tec light **OUTDOOR** APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

GECO DJ

Lampada portatile LED RGBW in polietilene con speaker bluetooth incorporato.

LED portable RGBW lamp with speaker bluetooth included polyethylene material.



Materiale

PE

Temperatura colore

RGB + 4000K



Driver

incluso

Material

PE

Colour temperature

RGB + 4000K



Driver

included



	colour temp.
I-GECO-DJ-L25 8031414862542	
lumen	RGB + 180 lm - 8h
watt	3W

Accessori inclusi / Included accessories



Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m 230V 50Hz




Telecomando infrarossi / IR remote control



Speaker 10W Bluetooth 4.0, distanza connessione max 15 m, durata 2h / 10w speaker bluetooth 4.0 connection distance max 15 m, lasting time 2h



Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable





GECO LED

Vaso e lampada LED RGBW in polietilene.
Vase and RGBW LED lamp in polyethylene.



Materiale

PE

Temperatura colore

RGB + 4000K



Driver

incluso

Material

PE

Colour temperature

RGB + 4000K



Driver

included



Accessori inclusi / Included accessories



Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m
IP20



Telecomando infrarossi / IR remote control



Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

I-GECO-VASO-Q-L

8031414862535

lumen

I-GECO-VASO-Q-XL

8031414864713

lumen

colour temp.



RGB 240 lm - 8h



RGB 240 lm - 8h

watt

4W

I-GECO-VASO-R-L

8031414862528

lumen

I-GECO-VASO-R-XL

8031414864720

lumen

colour temp.




RGB 240 lm - 8h




RGB 240 lm - 8h

watt


4W




280x280 mm
VASO-Q-L



380x380 mm
VASO-Q-XL



Ø 280 mm
VASO-R-L





Ø 380 mm
VASO-R-XL



I-GECO-SFERA-L30

8031414862436

lumen

colour temp.  + 

RGB 240 lm - 8h

I-GECO-SFERA-L40

8031414862443

lumen

colour temp.  + 

RGB 240 lm - 8h

I-GECO-SFERA-L50

8031414862450

lumen

colour temp.  + 



RGB 240 lm - 8h

watt 4W

I-GECO-CUBO-L30

8031414862467

lumen

colour temp.  + 

RGB 240 lm - 8h

I-GECO-CUBO-L40

8031414862474

lumen

colour temp.  + 

RGB 240 lm - 8h

I-GECO-CUBO-L50



8031414862481

lumen

colour temp.  + 

RGB 240 lm - 8h


watt 4W

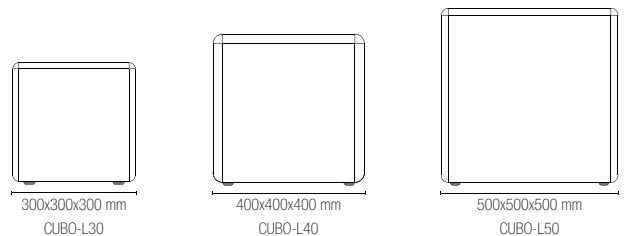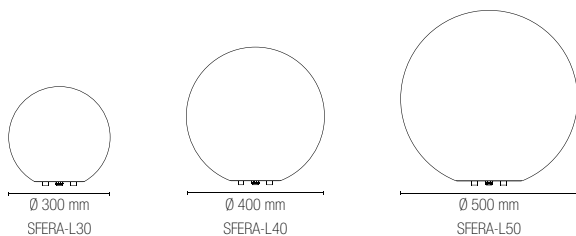

GECO E27



Lampadine LED Intec consigliate per illuminazione multicolor o bianco dinamico presenti nel catalogo BULBS COLLECTION / Suggested LED Intec bulbs for multicolor or dynamic white lighting included in the catalogue BULBS COLLECTION



Lampada LED RGBW classe F / LED RGBW bulb class F

colour temp.

KLASSIC-E27-RGBW
8031414905003



RGB 806 lm


watt	9W
beam angle	300°



IR Control system


GECO E27

Collezione di lampade con attacco E27 in polietilene.
PE lamp with E27 lampholder.




I-GECO-SFERA-S30
8031414864461

1 x E27 MAX 42W

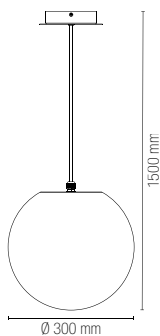

I-GECO-SFERA-S40
8031414864454

1 x E27 MAX 42W

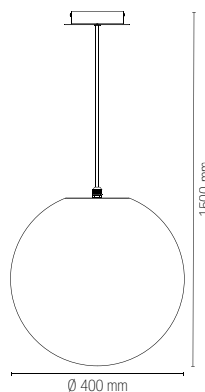

Lampadina non inclusa /
Light bulb not included





I-GECO-VASO-E-Q-L

8031414868506

I-GECO-VASO-E-Q-XL

8031414868131

1 x E27 MAX 42W





I-GECO-VASO-E-R-L

8031414868513

I-GECO-VASO-E-R-XL

8031414868520

1 x E27 MAX 42W

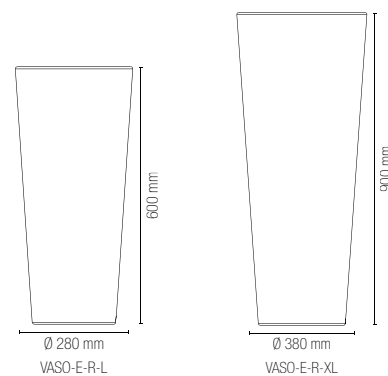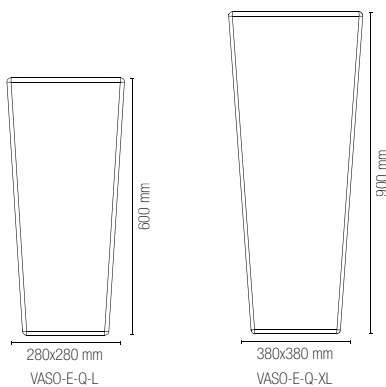

Lampadina non inclusa /
Light bulb not included



I-GECO-SFERA-E-L30

8031414868476


I-GECO-SFERA-E-L40

8031414868483

I-GECO-SFERA-E-L50

8031414868490

1 x E27 MAX 42W



I-GECO-SPK

8031414878437

Picchetto alluminio per lampade GECO E27 / Aluminum spike for E27 GECO family

I-GECO-CUBO-E-L30

8031414867943


I-GECO-CUBO-E-L40

8031414868117

I-GECO-CUBO-E-L50

8031414868124


1 x E27 MAX 42W



I-GECO-SPK

8031414878437

Picchetto alluminio per lampade GECO E27 / Aluminum spike for E27 GECO family

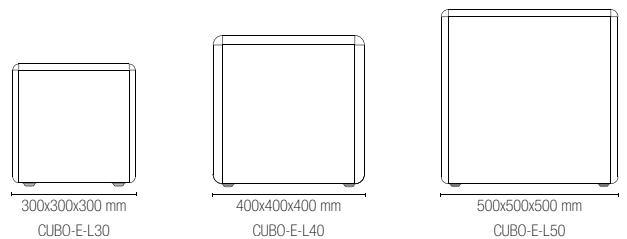

GECO E27

Piantana in polietilene con struttura in metallo bianco opaco o antracite.

PE floor lamp with metal structure white or anthracite colour.



Ø 340 mm



1530 mm




colour



I-GECO-BAR-PT
8031414868599

1 x E27 MAX 42W

Accessori inclusi / Included accessories



Cavo 2,5 m
con spina shuko /
2,5 m of cable
with schuko plug

 IP44



Lampadina non inclusa /
Light bulb not included




technical information

GECO E27



In.tec light **OUTDOOR** APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED



Ø 300 mm

1500 mm

colour



Accessori inclusi / Included accessories

I-GECO-SFERA-PT30
8031414864430

1 x E27 MAX 42W



Cavo 2,5 m
con spina shuko /
2,5 m of cable
with schuko plug



Lampadina non inclusa /
Light bulb not included



GECO LED SOLAR

Lampada portatile e galleggiante LED RGBW in polietilene con autoricarica solare.
PE LED portable and floating RGBW lamp with solar self charge.



Materiale

PE

Temperatura colore

RGB + 4000K



Driver

incluso

Material

PE

Colour temperature

RGB + 4000K



Driver

included



Accessori inclusi / Included accessories



Cavo per ricarica con adattatore DC5V 1A 1,2 m / Charging cable with adaptor DC5V 1A 1,2 m 230V 50Hz

IP20



Telecomando infrarossi / IR remote control



Carica alimentatore / DC charge

Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable




Carica solare / Auto solar charge


Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable

	colour temp.	
I-GECO-SFERA-SOL30 8031414870868	+	
lumen	RGB	90 lm - 12h
I-GECO-SFERA-SOL40 8031414870875	+	
lumen	RGB	90 lm - 12h
watt		1,5W


	colour temp.	
I-GECO-CUBO-SOL30 8031414870837	+	
lumen	RGB	90 lm - 12h
I-GECO-CUBO-SOL40 8031414870844	+	
lumen	RGB	90 lm - 12h
watt		1,5W




Ø 300 mm
SFERA-SOL30



Ø 400 mm
SFERA-SOL40



300x300x300 mm
CUBO-SOL30




400x400x400 mm
CUBO-SOL40



MANDALA

Collezione in metallo antracite con diffusore in vetro trasparente.
Metal collection anthracite finish with transparent glass diffuser.



Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included

LANT-MANDALA/S1
8031414870684

1 x E27 MAX 60W



colour



LANT-MANDALA/AP
8031414862641

1 x E27 MAX 60W

colour

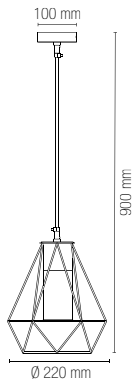


In.tec light **OUTDOOR** APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED



YORK

Collezione in alluminio nero con diffusore in policarbonato.
Black aluminum collection with PC diffuser.




Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included

LANT-YORK/S1
8031414862764

1 x E27 MAX 60W

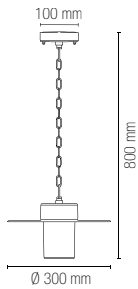


colour



LANT-YORK/AP
8031414862757

1 x E27 MAX 60W



colour



In.tec light **OUTDOOR** APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

PAVÈ

Proiettore in metallo color antracite con diffusore trasparente lucido nero in vetro.

Anthracite-colored metal projector with transparent glossy black glass diffuser.



Materiale

metallo
diffusore
vetro trasparente

Colore

antracite



Temperatura colore

3000K / 4000K



Driver

integrato

Material

metal
trasparent glass
diffuser

Colour

anthracite



Colour temperature

3000K / 4000K



Driver

built-in







LED-PAVE-6
8031414922925

colour temp.	colour


lumen	720 lm
watt	6W
beam angle	45°
pf	-

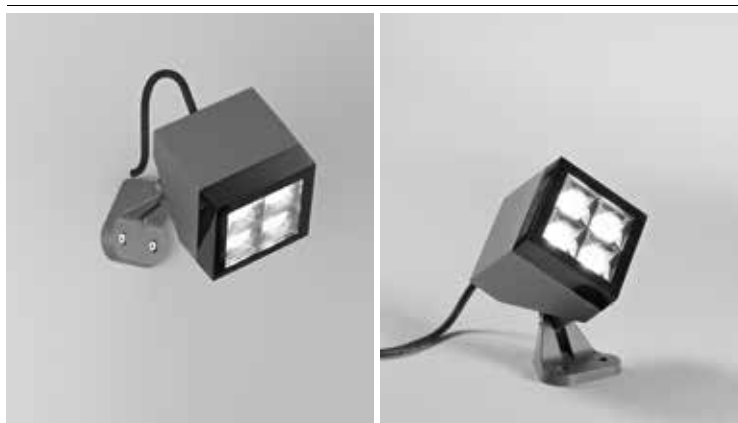

LED-PAVE-18
8031414922932

colour temp.	colour


lumen	2215 lm
watt	18W
beam angle	45°
pf	-



LED-PAVE-30
8031414922949

colour temp.	colour

lumen	3750 lm
watt	30W
beam angle	45°
pf	0.90



LUMINA

Collezione in metallo color antracite con punto luce LED integrato.
Lumina applique può essere utilizzato anche come segnapassi.
Anthracite-colored metal collection with integrated LED light point.
Limuna wall lamp can also be used as a step marker.



Materiale
alluminio

Colore
goffrato antracite



Temperatura colore
3000K / 4000K



Driver
integrato

Material
aluminum

Colour
embossed anthracite



Colour temperature
3000K / 4000K



Driver
built-in






LED-LUMINA-AP

8031414922864

lumen

colour temp.	colour
  	
1440 lm	




watt	12W
beam angle	120°
pf	-




LED-LUMINA-P80

8031414922871

lumen

colour temp.	colour
  	
1440 lm	

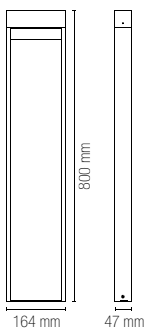


watt	12W
beam angle	120°
pf	-




LED-LUMINA-P200

8031414922888

lumen


colour temp.	colour
  	
3690 lm	

watt	30W
beam angle	120°
pf	0.90

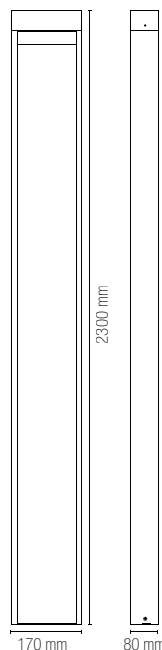

MIRAGE

Lantern in metallo colore bianco o antracite diffusore in vetro trasparente.
Metal lantern white or anthracite finish with clear glass diffuser.

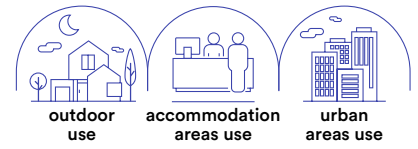

colour

LANT-MIRAGE-AP-BCO
8031414896394




LANT-MIRAGE-AP
8031414867059



1 x E27 MAX 60W


130 x 130 mm




Lampadina non inclusa /
Light bulb not included




LANT-MIRAGE-S1-BCO
8031414896431



LANT-MIRAGE-L1-BCO
8031414896400



LANT-MIRAGE-P90-BCO
8031414896424



LANT-MIRAGE-P200-BCO
8031414896417



LANT-MIRAGE-S1
8031414867066



LANT-MIRAGE-L1
8031414869190



LANT-MIRAGE-P90
8031414869206



LANT-MIRAGE-P200
8031414869213







1 x E27 MAX 60W

1 x E27 MAX 60W

1 x E27 MAX 60W

1 x E27 MAX 60W

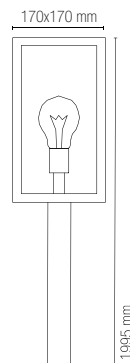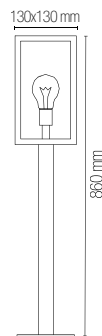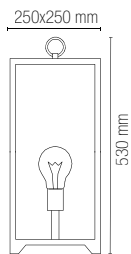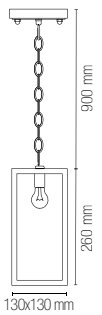


Accessori inclusi / Included accessories



Cavo 2,5 m
con spina shuko /
2,5 m of cable
with schuko plug



SKITTLE

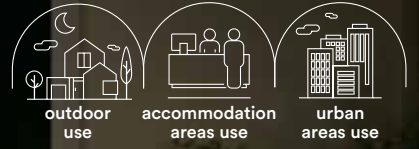



**Collezione in alluminio pressofuso
colore antracite con diffusore in PC.**
Collection in die-cast aluminum in
anthracite colour with PC diffuser.




colour

I-SKITTLE-AP
8031414881819



1 x E27 MAX 28W




colour

I-SKITTLE-PL
8031414881826



1 x E27 MAX 28W



colour

I-SKITTLE-P65
8031414881833



1 x E27 MAX 28W



colour

I-SKITTLE-P100
8031414882434



1 x E27 MAX 28W



Lampadina consigliata /
Suggested light bulb



Lampadina non inclusa /
Light bulb not included

ORBIT

Lantern in acrilico PMMA e base in alluminio pressofuso nero.
Acrylic PMMA lantern with base in die cast aluminum black finish.




colour

LANT-ORBIT/AP
8031414862658



1 x E27 MAX 60W



Lampadina non inclusa /
Light bulb not included



colour

LANT-ORBIT/S1
8031414862665



1 x E27 MAX 60W



colour

LANT-ORBIT/L1
8031414866335



1 x E27 MAX 60W



colour

LANT-ORBIT/P1
8031414862689



1 x E27 MAX 60W







colour

LANT-ORBIT/P3
8031414862702



3 x E27 MAX 60W

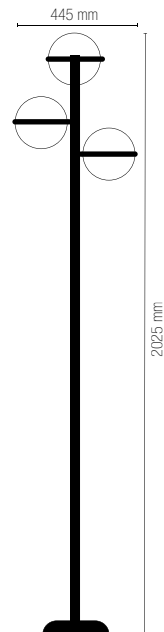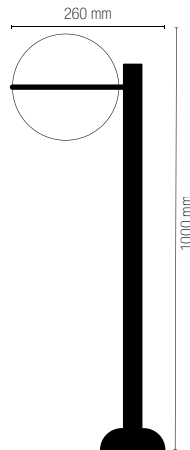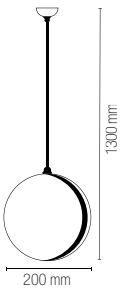

PRISMA

Lantern in alluminio pressofuso colore antracite diffusore in vetro trasparente.

Die cast aluminum lantern anthracite finish with clear glass diffuser.






colour

LANT-PRISMA/AP1A
8031414867103



1 x E27 MAX 60W




colour

LANT-PRISMA/AP1B
8031414867073



1 x E27 MAX 60W




colour

LANT-PRISMA/S1
8031414867080



1 x E27 MAX 60W

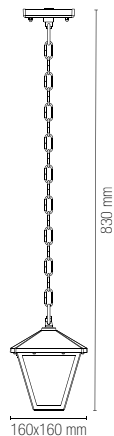


colour

LANT-PRISMA/P1
8031414869183



1 x E27 MAX 60W

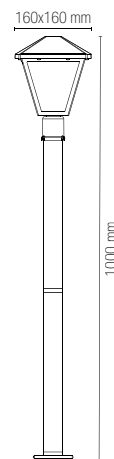

Lampadina consigliata /
Suggested light bulb




Lampadina non inclusa /
Light bulb not included

ROMA

Lanterne in alluminio pressofuso con diffusore in vetro trasparente.

Die-cast aluminum lantern with clear glass diffuser.

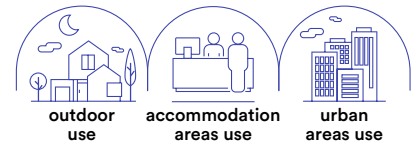

colour


LANT-ROMA/AP1A BCO
8031434661217



LANT-ROMA/AP1A
8031430751172



1 x E27 MAX 60W




colour

LANT-ROMA/AP1A-S
8031435921235



1 x E27 MAX 60W



colour


LANT-ROMA/AP1B BCO
8031434671216



LANT-ROMA/AP1B
8031430761171



1 x E27 MAX 60W



colour


LANT-ROMA/S1 BCO
8031434681215



LANT-ROMA/S1
8031430791178



1 x E27 MAX 60W

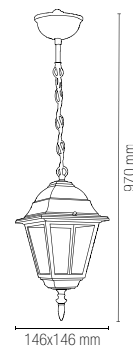

Accessori integrati / Built in accessories



Sensore di movimento regolabile / Adjustable motion sensor

ON	10lux
distanza / distance	1-8m
	90°
5 seconds - 5 minutes	



Lampadina non inclusa / Light bulb not included



colour

LANT-ROMA/L1 BCO
8031436951248



LANT-PALETTO
8031414042203



1 x E27 MAX 60W



colour

LANT-ROMA/P1 BCO
8031436941249



LANT-ROMA/P1
8031430771170



1 x E27 MAX 60W



colour

LANT-ROMA/P3
8031430781179



3 x E27 MAX 60W







colour

LANT-ROMA-HEAD21
8031414878512



1 x E27 MAX 60W

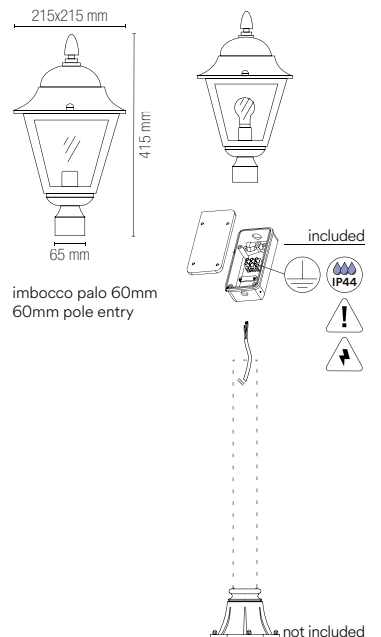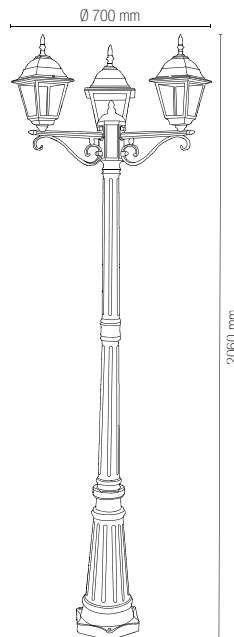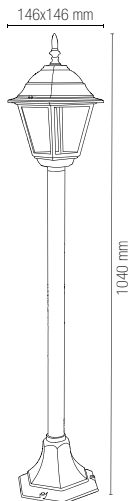





MILANO

Lanterne in alluminio pressofuso con diffusore in vetro trasparente.

Die-cast aluminum lantern with clear glass diffuser.



colour

LANT-MILANO/AP1A BCO
8031436931240



LANT-MILANO/AP1A
8031436921241



1 x E27 MAX 60W



colour

LANT-MILANO/AP1B BCO
8031436911242



LANT-MILANO/AP1B
8031436901243



1 x E27 MAX 60W



Lampadina non inclusa /
Light bulb not included



colour

LANT-MILANO/S1 BCO
8031436851234



LANT-MILANO/S1
8031436841235



1 x E27 MAX 60W



colour

LANT-MILANO/L1 BCO
8031436891247



LANT-MILANO/L1
8031436881248



1 x E27 MAX 60W



colour

LANT-MILANO/P1 BCO
8031436871232



LANT-MILANO/P1
8031436971246



1 x E27 MAX 60W






colour

LANT-MILANO-HEAD23
8031414878529



1 x E27 MAX 60W

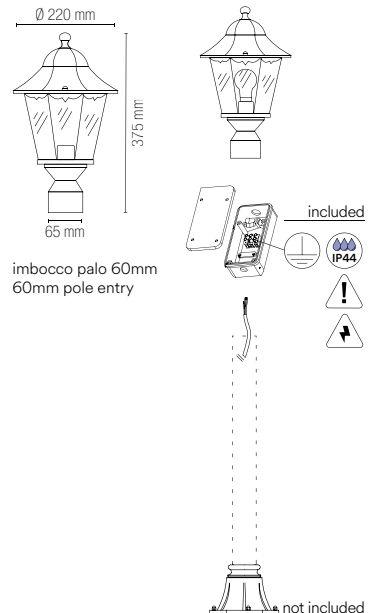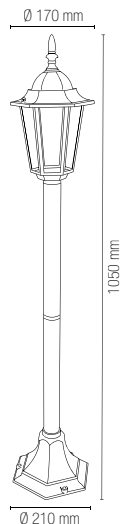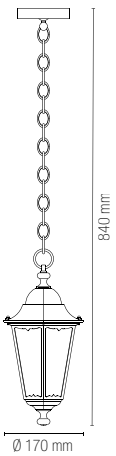

FIRENZE

Lanterne in alluminio pressofuso nero pennellato
argento con diffusore in vetro trasparente.

Diecast aluminum lantern black
brush silver with clear glass diffuser.



outdoor
use

accommodation
areas use

urban
areas use




colour

LANT-FIRENZE/AP1A
8031430701177



1 x E27 MAX 60W

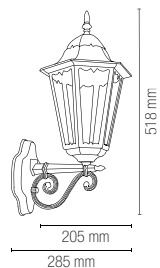

Lampadina non inclusa /
Light bulb not included



colour

LANT-FIRENZE/AP1B
8031430711176



1 x E27 MAX 60W



colour

LANT-FIRENZE/S1
8031430741173



1 x E27 MAX 60W



colour

LANT-FIRENZE/P1
8031430721175



1 x E27 MAX 60W







colour

LANT-FIRENZE/P3
8031430731174



3 x E27 MAX 60W

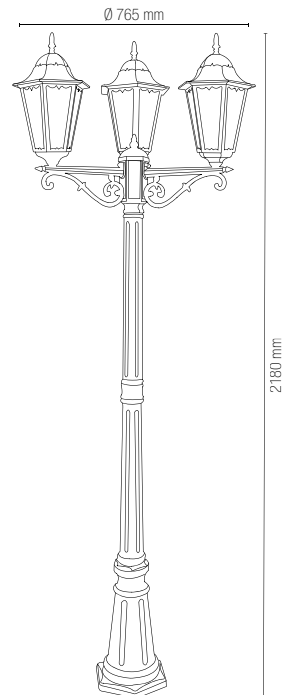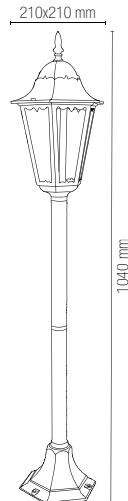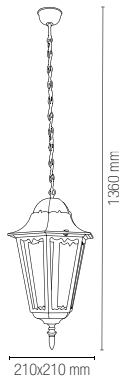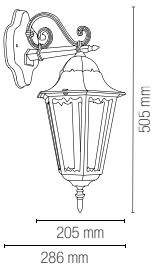

SANTIAGO

Lanterne in alluminio pressofuso nero pennellato verde con diffusore in vetro trasparente.

Diecast aluminum lantern black brush green with clear glass diffuser.




colour

LANT-SANTIAGO/APIA
8031430801174



1 x E27 MAX 60W

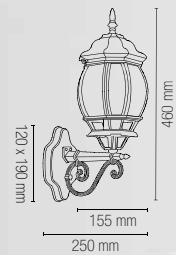

Lampadina non inclusa /
Light bulb not included



colour

LANT-SANTIAGO/AP1B
8031430811173



1 x E27 MAX 60W



colour

LANT-SANTIAGO/S1
8031430841170



1 x E27 MAX 60W



colour

LANT-SANTIAGO/P1
8031430821172



1 x E27 MAX 60W






colour

LANT-SANTIAGO/P3
8031430831171



3 x E27 MAX 60W

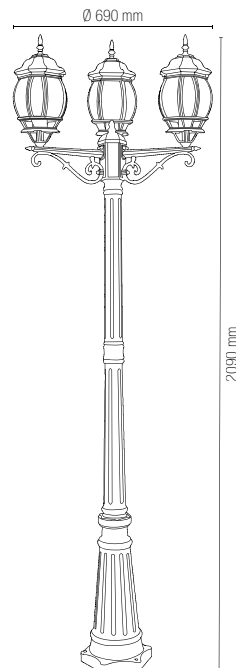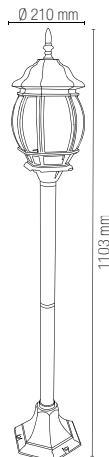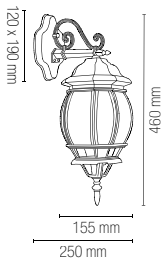

VENEZIA

Lanterne in alluminio pressofuso con finiture in colore rame con diffusore in policarbonato trasparente.

Aluminum die-cast lantern with copper colour finish and clear polycarbonate diffuser.




colour

LANT-VENEZIA-AP1A
8031440312004



1 x E27 MAX 60W

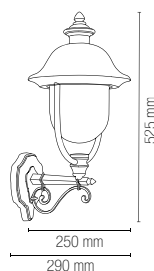


colour

LANT-VENEZIA-AP1B
8031440311991



1 x E27 MAX 60W

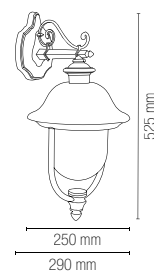

Lampadina non inclusa /
Light bulb not included



colour

LANT-VENEZIA-S1
8031440313285



1 x E27 MAX 60W



colour

LANT-VENEZIA-L1
8031440311984



1 x E27 MAX 60W



colour

LANT-VENEZIA-P1
8031440313308



1 x E27 MAX 60W







colour

LANT-VENEZIA-P3
8031440313292



3 x E27 MAX 60W

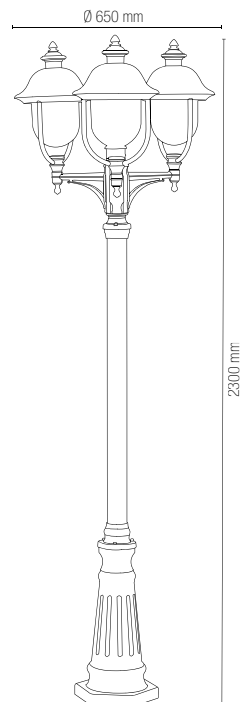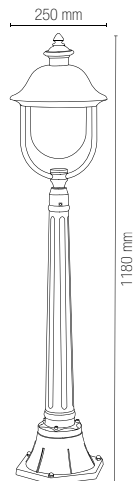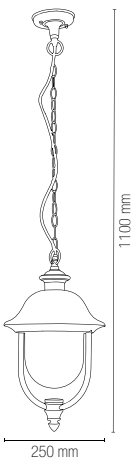

OUTDOOR APPLIQUE SOSPENSIONI E PALETTI CORRELATI / WALL SUSPENSION AND FLOOR LAMPS COMBINED

In.tec light

PAVIA

Lanterne in alluminio pressofuso nero goffrato con diffusore in acrilico trasparente.

Die-cast aluminum lantern in embossed black colour with clear acrylic diffuser.





colour

LANT-PAVIA-API
8031440312028



1 x E27 MAX 60W



colour

LANT-PAVIA-S1
8031440312042



1 x E27 MAX 60W



colour

LANT-PAVIA-P1
8031440312035



1 x E27 MAX 60W







colour

LANT-PAVIA-P3
8031440312011



3 x E27 MAX 60W

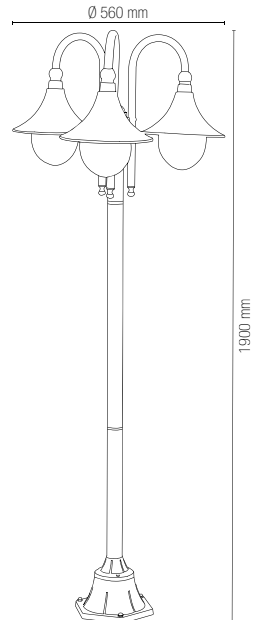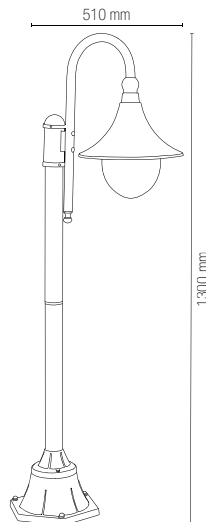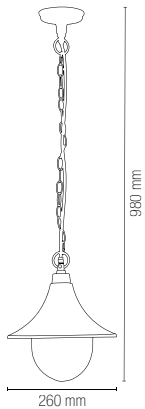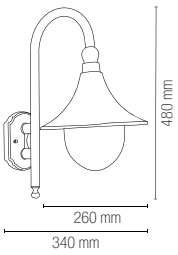

Lampadina non inclusa /
Light bulb not included

BRIGHTMAX

Modulo LED per lampioni con alimentatore
OSRAM OT60 dali e mezzanotte virtuales

LED module for lampposts with OSRAM OT60
dali power supply and virtual midnight.



Materiale

alluminio

Colore

nero



Temperatura colore

2700K / 4000K



Driver

incluso



Durata e on/off

50.000h
>25.000 on/off

Material

aluminum

Colour

black



Colour temperature

2700K / 4000K



Driver



included



Life time and on/off

50.000h
>25.000 on/off



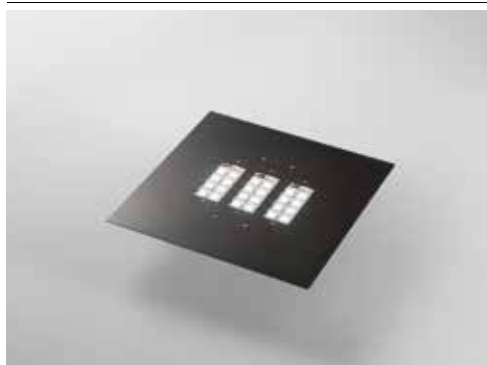

BRIGHTMAX-60C

8031414883899

lumen

colour temp. colour

9600 lm

BRIGHTMAX-60M

8031414883905



lumen

9600 lm

watt 60W

beam angle 360°

Fotometria del prodotto / Photometric curve


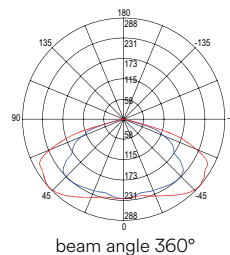


BRIGHTMAX-LENS

8031414883912

Lente bi-asimmetrico e tri-asimmetrico /
Be-asymmetric and three-asymmetric lens


Fotometria del prodotto / Photometric curve

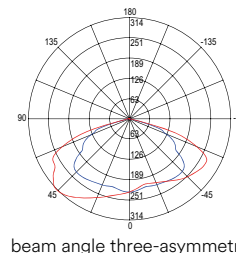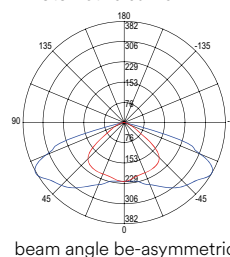

Mezzanotte Virtuale / Virtual Midnight

Sistema indipendente della riduzione della luce in 5 STEP. Il modulo LED è programmato con un determinato programma (personalizzabile su richiesta) per ottimizzare il risparmio energetico durante le ore notturne. L'apparecchio prevede un sistema di autoapprendimento che determina in maniera autonoma, in base alle accensioni e agli spegnimenti pregressi, il punto di Mezzanotte Virtuale. La Mezzanotte Virtuale è il punto che determina la riduzione di flusso in base al profilo impostato, lasciando invariato l'impianto. Per un corretto funzionamento del sistema Mezzanotte Virtuale è necessario un'accensione e uno spegnimento regolare quotidiano.


Independent system of light reduction in 5 steps. The LED module is set with a specific program (customizable) to optimize the energy saving time during night hours. The device is equipped with a out-feedback system which determine independently, the Virtual Midnight point based on the past switch on-switch-off time record. Virtual Midnight is the point which determines the light flux reduction based on the set profile, keeping the electrical system untouched. For a correct working of the system of Virtual Midnight it is necessary a daily regular cycle of switching on-off.

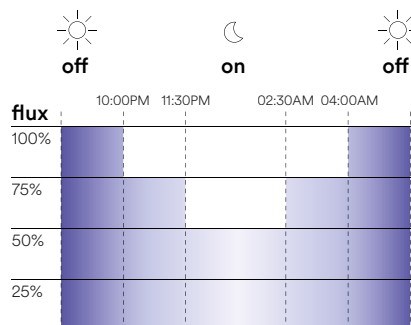

Impostazioni di fabbrica / Default Settings

hours	flux
ON ÷ 10:00	100%
10:00 ÷ 11:30	75%
11:30 ÷ 02:30	50%
02:30 ÷ 04:00	75%
04:00 ÷ OFF	100%

OUTDOOR

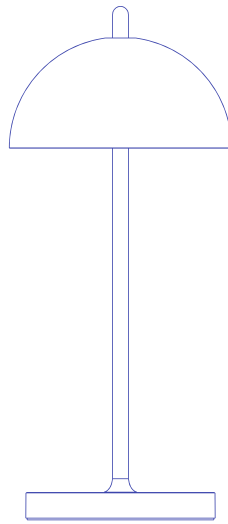

LAMPADE DA TAVOLO RICARICABILI
RECHARGEABLE TABLE LAMP

PARTY

Lampada da tavolo ricaricabile.
Rechargeable table lamp.



Materiale

metallo

Colore

goffrato bianco
goffrato nero
goffrato verde
goffrato oro
goffrato crema
goffrato corten



Temperatura colore

3000K



Material

metal

Colour

embossed white
embossed black
embossed green
embossed gold
embossed cream
embossed corten



Colour temperature

3000K




	colour temp.	colour
LED-PARTY-S-BCO 8031414915965 lumen		
LED-PARTY-S-NER 8031414915958 lumen		
LED-PARTY-S-VDE 8031414915996 lumen		
LED-PARTY-S-ORO 8031414916009 lumen		
LED-PARTY-S-CRM 8031414915989 lumen		
LED-PARTY-S-BRO 8031414915972 lumen		

watt 1,5W

	colour temp.	colour
LED-PARTY-L-BCO 8031414916023 lumen		
LED-PARTY-L-NER 8031414916016 lumen		
LED-PARTY-L-VDE 8031414916054 lumen		
LED-PARTY-L-ORO 8031414916061 lumen		
LED-PARTY-L-CRM 8031414916047 lumen		
LED-PARTY-L-BRO 8031414916030 lumen		

watt 2,5W



Accessorio non incluso /
Not included accessory



Adattatore DC5V 1A /
Adaptor DC5V 1A

Accessori inclusi /
Included accessories



Cavo per ricarica
magnetico /
Magnetic
charging cable



DC3.7V 4000 mAh
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable





LIBERTY

Lampada da tavolo ricaricabile.
Rechargeable table lamp.



Materiale

metallo

Colore

goffrato bianco
goffrato nero
goffrato cromo lucido
goffrato oro lucido



Temperatura colore

3000K



Material

metal

Colour

embossed white
embossed black
embossed glossy chrome
embossed glossy gold



Colour temperature

3000K





OUTDOOR LAMPADE DA TAVOLO RICARICABILI / RECHARGEABLE TABLE LAMP

In.tec light



	colour temp.	colour
LED-LIBERTY-BCO 8031414916078		
lumen	300 lm - 8h	
LED-LIBERTY-NER 8031414916085		
lumen	300 lm - 8h	
LED-LIBERTY-CR 8031414916092		
lumen	300 lm - 8h	
LED-LIBERTY-ORO 8031414916108		
lumen	300 lm - 8h	
watt	2W	

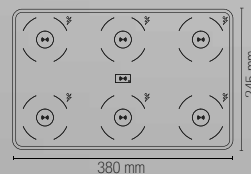

Accessorio non incluso /
Not included accessory



Adattatore 12V 6A /
Adaptor 12V 6A

Accessori inclusi /
Included accessories



Cavo per ricarica
magnetico /
Magnetic
charging cable



DC3.7V 4000 mAh
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable

input 12V 6A output V 1.5A



SMALL DRINK

Lampada da tavolo ricaricabile.
Rechargeable table lamp.



Materiale

metallo

Colore

goffrato bianco
goffrato nero
goffrato oro
goffrato corten



Temperatura colore

3000K



Material

metal

Colour

embossed white
embossed black
embossed gold
embossed corten



Colour temperature

3000K




OUTDOOR LAMPADE DA TAVOLO RICARICABILI / RECHARGEABLE TABLE LAMP

In.tec light



	colour temp.	colour
LED-DRINK-S-BCO 8031414922963 lumen		
LED-DRINK-S-NER 8031414922987 lumen		
LED-DRINK-S-ORO 8031414922994 lumen		
LED-DRINK-S-BRO 8031414922970 lumen		
		1,5W



Accessori inclusi / Included accessories



Base per ricarica con USB /
Charging base with USB



5-7
hours


DC3.7V 2x2200 mAh
Batteria ricaricabile non sostituibile /
Rechargeable battery non replaceable



Accessori inclusi / Included accessories

Cavo per ricarica 2,5m /
Charging cable 2,5m

LED-DRINK-PS-S 8031414923014	
input 220/240V 50/60hz output 5V 3A	

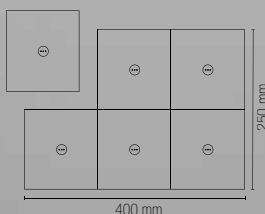

DRINK

Lampada da tavolo ricaricabile.
Rechargeable table lamp.



Materiale

metallo

Colore

goffrato bianco
goffrato nero
goffrato oro
goffrato corten



Temperatura colore

3000K



Material

metal

Colour

embossed white
embossed black
embossed gold
embossed corten




Colour temperature

3000K



	colour temp.	colour
LED-DRINK-BCO 8031414885299		
lumen	190 lm - 9h	
LED-DRINK-NER 8031414885312		
lumen	190 lm - 9h	
LED-DRINK-ORO 8031414885329		
lumen	190 lm - 9h	
LED-DRINK-BRO 8031414885305		
lumen	190 lm - 9h	
watt	2,2W	



Accessori inclusi / Included accessories



Base per ricarica con USB /
Charging base with USB




5-7
hours

DC3.7V 2x2200 mAh
Batteria ricaricabile non sostituibile /
Rechargeable battery non replaceable

LED-DRINK-PS
8031414923007

input 220/240V 50hz output 5V 3A max 15W

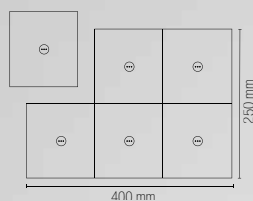



In.tec light **OUTDOOR** LAMPADE DA TAVOLO RICARICABILI / RECHARGEABLE TABLE LAMP

JAMMIN

Lampada da tavolo ricaricabile.
Rechargeable table lamp.



Materiale
metallo e PE

Colore
goffrato bianco
goffrato nero



Temperatura colore
3000K



Material
metal and PE


Colour
embossed white
embossed black



Colour temperature
3000K



	colour temp.	colour
LED-JAMMIN-L-BCO 8031414884377 lumen		
LED-JAMMIN-L-NER 8031414884384 lumen		
watt	2,2W	



**Accessori inclusi /
Included accessories**



**USB A 5V 2A
USB C 5V 2A**
Cavo per ricarica /
Charging cable



DC3.7V 4000 mAh
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable



In.tec light **OUTDOOR** LAMPADE DA TAVOLO RICARICABILI / RECHARGEABLE TABLE LAMP

BRIO

Lampada da tavolo ricaricabile.
Rechargeable table lamp.



Materiale
PC

Colore
bianco
nero



Temperatura colore
3000K



Material
PC


Colour
white
black



Colour temperature
3000K



	colour temp.	colour
LED-BRIO-BCO 8031414889594 lumen		
LED-BRIO-NER 8031414889587 lumen		
watt	2,5W	



**Accessori inclusi /
Included accessories**



USB
Cavo per ricarica /
Charging cable



DC5V 2200 mAh
Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable



In.tec light

OUTDOOR LAMPADE DA TAVOLO RICARICABILI / RECHARGEABLE TABLE LAMP

MYKES

Lampada da tavolo ricaricabile.
Rechargeable table lamp.



Materiale
metallo e PE

Colore
goffrato bianco
goffrato nero



Temperatura colore selezionabile
3000K / 4000K / 5000K



Material
metal and PE


Colour
embossed white
embossed black



Selectable color temperature
3000K / 4000K / 5000K



	colour temp.	colour
LEDT-MYKES-WHITE 8031414884445 lumen		
	300 lm	
LEDT-MYKES-BLACK 8031414884438 lumen		
	300 lm	
watt	4,5W	



**Accessori inclusi /
Included accessories**



Cavo per ricarica con adattatore DC5V 2A /
Charging and speaker cable with adaptor DC5V 2A



COCKTAIL

Lampada da tavolo ricaricabile.
Rechargeable table lamp.



Materiale

metallo

Colore

goffrato bianco
goffrato nero
goffrato oro
goffrato corten



Temperatura colore

3000K



Material

metal

Colour

embossed white
embossed black
embossed gold
embossed corten



Colour temperature

3000K



	colour temp.	colour
LED-COCKTAIL-BCO 8031414882496 lumen	192 lm - 9h	white
LED-COCKTAIL-NER 8031414882502 lumen	192 lm - 9h	black
LED-COCKTAIL-ORO 8031414885282 lumen	192 lm - 9h	gold
LED-COCKTAIL-BRO 8031414882519 lumen	192 lm - 9h	corten
watt		2,2W



Accessori inclusi / Included accessories



Cavo per ricarica /
Charging cable



DC3.7V 2x2200 mAh
Batteria ricaricabile non sostituibile /
Rechargeable battery non replaceable



In.tec light **OUTDOOR** LAMPADE DA TAVOLO RICARICABILI / RECHARGEABLE TABLE LAMP

CLIMAX



Lanterna ricaricabile.
Rechargeable lamp.





- Materiale**
metallo - acrilico
- Colore**
nero opaco
- 
- Temperatura colore**
3000K
- 
- Material**
metal - acrylic
- Colour**
matt black
- 
- Colour temperature**
3000K
- 



	colour temp.	colour		colour temp.	colour
LED-CLIMAX-L1 8031414883141 lumen			LED-CLIMAX-LG1 8031414883158 lumen		
	140 lm - 8h			140 lm - 8h	
watt		2W	watt		2W

- Accessori inclusi / Included accessories**
-  **USB**
Cavo per ricarica / Charging cable
 -  **5-7 hours**
DC3.7V 2600 mAh
Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable





In.tec light **OUTDOOR** LAMPADE DA TAVOLO RICARICABILI / RECHARGEABLE TABLE LAMP



OBERON

Lanterna ricaricabile.
Rechargeable lamp.



Materiale

metallo

Colore

bianco



Temperatura colore

3000K



Material

metal

Colour

white



Colour temperature

3000K



LANT-OBERON

8031414882526

lumen

colour temp.



168 lm - 9h

colour




watt

2,2W

LANT-OBERON-KIT-AP

8031414882533


Kit staffa applique per lume /
Wall lamp bracket kit



LANT-OBERON-KIT-S

8031414882540

Kit sospensione per lume cavo 2 m /
Suspension kit 2 m cable

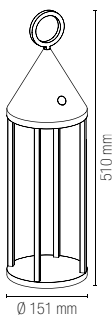

Accessori inclusi / Included accessories




Cavo per ricarica con adattatore DC5V 1A 1,2 m /
Charging cable with adaptor DC5V 1A 1,2 m



DC3.7V 2x2200 mAh
Batteria ricaricabile non sostituibile /
Rechargeable battery non replaceable

OUTDOOR



INCASSI E SEGNAPASSI
INGROUND AND WALK LIGHTS

BARRET

Segnapassi incasso.
Recessed light.



Materiale
alluminio

Colore
nikel

Temperatura colore
3000K / 4000K



Driver
350mA 3,5V
corrente costante
non incluso

Material
aluminum

Colour
nikel



Colour temperature
3000K / 4000K



Driver
350mA 3,5V
constant current
not included



LED-BARRET-R24C
8031440355070

lumen

colour temp. | colour | recessed box



85 lm

LED-BARRET-R24
8031440364416



lumen



85 lm


Ø 20 mm

Ø 24 mm




watt 1W
driver 3,5V DC
beam angle 40°
pressure loads max 250 kg
Ø 16 mm

Fotometria del prodotto /
Photometric curve

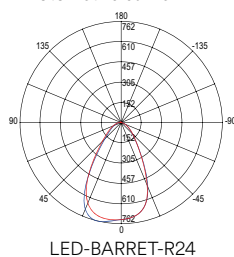

Connessione in serie /
Serie connection system

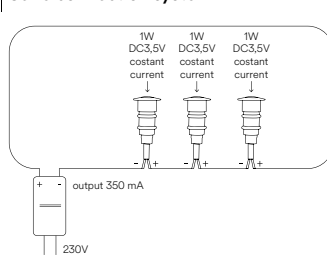

Driver p. 843-852

Accessori inclusi /
Included accessories



x1
Cavo 1 m /
1 m cable



SUBWAY

Segnapassi incasso.
Recessed light.



Materiale
alluminio

Colore
nikel



Temperatura colore
3000K / 4000K / BLU



Driver
DC 12-24V
tensione costante
non incluso

Material
aluminum

Colour
nikel



Colour temperature
3000K / 4000K



Driver
DC 12-24V
constant voltage
not included



LED-SUBWAY-R1C

8031414879342

lumen

colour temp.



385 lm



LED-SUBWAY-R1M

8031414877263

lumen



420 lm



LED-SUBWAY-R1B

8031414877270

lumen



53 lm



watt

3W

driver

12/24V

beam angle


15°

pressure loads


max 1000 kg



Ø 24 mm




Fotometria del prodotto /
Photometric curve



LED-SUBWAY-R1

Connessione in parallelo /
Serie connection system



Driver p. 843-852
Controller p. 854-857

Accessori inclusi /
Included accessories



x1
Cavo 1 m /
1 m cable




OUTDOOR INCASSI E SEGNAPASSI / INGROUND AND WALK LIGHTS

In.tec light

RIDER

Kit 6 pz segnapassi incasso.
Kit 6pcs recessed light.





Materiale

acciaio

Colore

acciaio



Temperatura colore

RGB



Driver

12V 6W
incluso

Material

steel

Colour

stainless steel



Colour temperature

RGB



Driver

12V 6W
included



LED-RIDER-R6

8031436141236

lumen

colour temp.



360 lm

watt	6 × 0,6W
driver	12V 6W DC
beam angle	120°
pressure loads	max 100 kg
	Ø 23 mm



LED-RIDER-R6-RGB

8031439871260



lumen

colour temp.




RGB

watt	6 × 0,6W
driver	12V 6W DC
beam angle	120°
pressure loads	max 100 kg
	Ø 23 mm

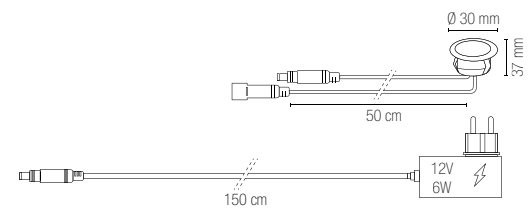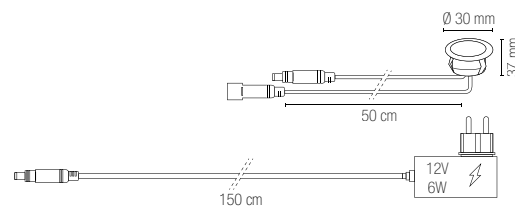

Fotometria del prodotto / Photometric curve



LED-RIDER-R6

Accessori inclusi / Included accessories



x6



x6

Cavo 1,5 m / 1,5 m cable



IP44

Accessori inclusi / Included accessories



x6



x1

Cavo 1,5 m / 1,5 m cable



IP44



IR Control system

RIDER

Kit 6 pz segnapassi incasso.
Kit 6pcs recessed light.

Materiale
lega di zinco

Material
zinc alloy

Colore
silver

Colour
silver

Temperatura colore
4000K

Colour temperature
4000K

Driver
12V 6W DC
incluso

Driver
12V 6W DC
included



colour temp. | colour

LED-RIDER-R6-DIR

8031439921279

lumen

100 lm

watt 6 × 0,6W

driver 12V 6W DC

beam angle 105°

pressure loads max 100 kg

Ø 23 mm

Ø 33,3 mm

38 mm


50 cm

150 cm

12V 6W

12V 6W

Fotometria del prodotto / Photometric curve



LED-RIDER-R6-DIR

Accessori inclusi / Included accessories



x6



x1

Cavo 1,5 m /
1,5 m cable



IP44

IMPACT

Segnapassi incasso in alluminio.
Aluminum recessed steplight.



Materiale
alluminio

Colore
nikel



Temperatura colore
3000K / 4000K



Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
nikel



Colour temperature
3000K / 4000K



Driver
DC 24V
constant voltage
not included



Connessione in parallelo /
Serie connection system
Driver p. 843-852
Controller p. 854-857



EASY DOMOTICA



LED-IMPACT24V-R1C

8031414879298

lumen

colour temp.



170 lm

colour



170 lm


recessed box




watt 2W
driver DC 24V
beam angle 105°
pressure loads max 250 kg
Ø 35 mm



Fotometria del prodotto / Photometric curve




LED-IMPACT24V-R1C
LED-IMPACT24V-Q1C



LED-IMPACT24V-R1M
LED-IMPACT24V-Q1M

Accessori inclusi / Included accessories



x1

Cavo 1 m / 1 m cable



LED-IMPACT24V-Q1C

8031414879311

lumen

colour temp.



170 lm

colour



170 lm

recessed box



watt 2W
driver DC 24V
beam angle 105°
pressure loads max 250 kg
Ø 35 mm



STEP

Segnapassi incasso in alluminio.
Aluminum recessed steplight.



Materiale
alluminio

Colore
silver



Temperatura colore
3000K / 4000K



Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
silver



Colour temperature
3000K / 4000K



Driver
DC 24V
constant voltage
not included





LED-STEP24V-R1C

8031414879250

lumen

colour temp.	colour
170 lm	

LED-STEP24V-R1M

8031414879267

lumen


170 lm	

watt	2W
driver	DC 24V
beam angle	105°
pressure loads	max 250 kg
	Ø 35 mm

recessed box



Ø 35 mm



Ø 45 mm



LED-STEP24V-R4C

8031414879274

lumen

colour temp.	colour
170 lm	

LED-STEP24V-R4M

8031414879281

lumen


170 lm	

watt	2W
driver	DC 24V
beam angle	105°
pressure loads	max 250 kg
	Ø 35 mm

recessed box



Ø 35 mm




Ø 45 mm




Connessione in parallelo /
Serie connection system
Driver p. 843-852
Controller p. 854-857


Fotometria del prodotto / Photometric curve




LED-STEP24V-R1C



LED-STEP24V-R1M



LED-STEP24V-R4C



LED-STEP24V-R4M

Accessori inclusi /
Included accessories




x1
Cavo 1 m /
1 m cable

WALK

Faro calpestabile ad incasso in acciaio inox.
Walkable recessed light in stainless steel.




- Materiale**
acciaio inox

- Temperatura colore**
4000K
- 






- Driver**
integrato

- Material**
stainless steel

- Colour temperature**
4000K
- 

- Driver**
built-in



	colour temp.	colour	recessed box
LED-WALK-RT 8031414882816			
lumen	1500 lm		
watt	12W		
beam angle	30°		
pressure loads	max 2000 kg		



WALK



LED-WALK-Q7C

8031414885824

lumen

colour temp.



recessed box


345 lm

LED-WALK-Q7

8031440355599

lumen

375 lm



watt 3W

beam angle 30°

pressure loads max 2000 kg



LED-WALK-Q11C

8031414885800

lumen

colour temp.



recessed box



930 lm

LED-WALK-Q11

8031440355575

lumen

990 lm



watt 8W

beam angle 30°

pressure loads max 2000 kg



LED-WALK-Q14C

8031414885817

lumen

colour temp.



recessed box



1400 lm

LED-WALK-Q14

8031440355551

lumen

1500 lm




watt 12W


beam angle 30°

pressure loads max 2000 kg


Fotometria del prodotto / Photometric curve



LED-WALK-Q7



LED-WALK-Q11



LED-WALK-Q14



LED-WALK-R7C

8031414885855

lumen

colour temp.	colour
345 lm	

LED-WALK-R7


8031440355582

lumen

375 lm	

watt	3W
beam angle	30°
pressure loads	max 2000 kg

recessed box



LED-WALK-R11C

8031414885831

lumen

colour temp.	colour
930 lm	

LED-WALK-R11



8031440355568

lumen

990 lm	

watt	8W
beam angle	30°
pressure loads	max 2000 kg

recessed box



LED-WALK-R14C

8031414885848

lumen

colour temp.	colour
1400 lm	

LED-WALK-R14



8031440355544

lumen


1500 lm	

watt	12W
beam angle	30°
pressure loads	max 2000 kg


recessed box




Fotometria del prodotto / Photometric curve



LED-WALK-R7



LED-WALK-R11



LED-WALK-R14

HUMMER

Faro carrabile ad incasso in acciaio inox.
Driveover recessed light in stainless steel.



outdoor
use



accommodation
areas use




urban
areas use







colour	recessed box
I-HUMMER-R1 8031414893188	
I-HUMMER-R1-ANT 8031414895830	
I-HUMMER-R1-BRO 8031414893195	
1 x GU10 MAX 35W	
pressure loads	max 500 kg

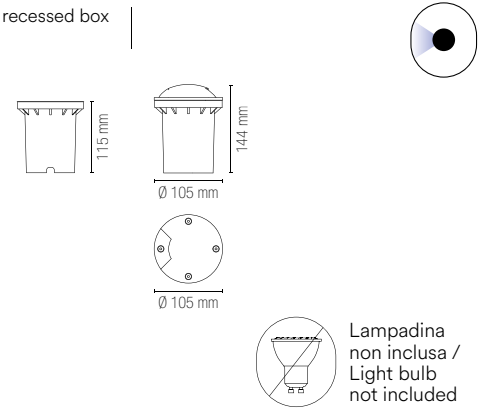


colour	recessed box
I-HUMMER-R2 8031414893201	
I-HUMMER-R2-ANT 8031414895847	
I-HUMMER-R2-BRO 8031414893218	
1 x GU10 MAX 35W	
pressure loads	max 500 kg

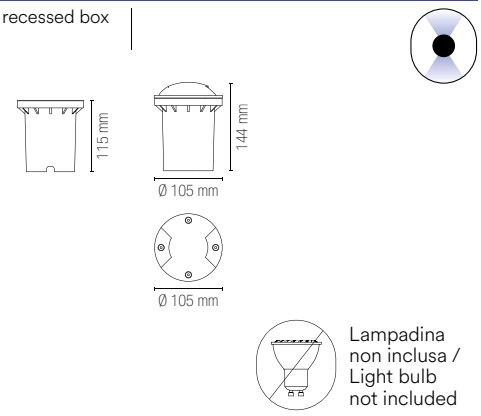

colour	recessed box
I-HUMMER-R4 8031414877249	
I-HUMMER-R4-ANT 8031414895854	
I-HUMMER-R4-BRO 8031414893225	
1 x GU10 MAX 35W	
pressure loads	max 500 kg

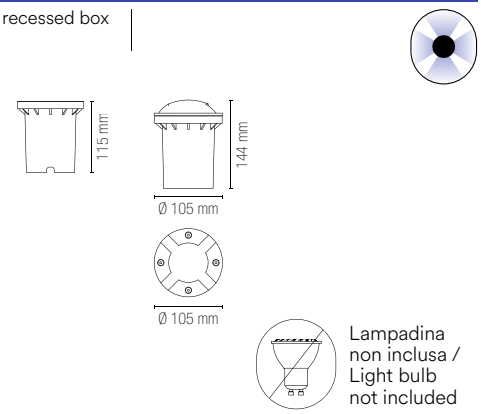


colour	recessed box
I-HUMMER-UP 8031414893232	
I-HUMMER-UP-ANT 8031414895861	
I-HUMMER-UP-BRO 8031414893249	
1 x GU10 MAX 35W	
pressure loads	max 500 kg

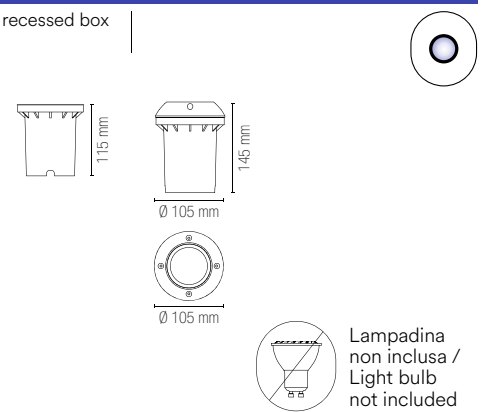

DRIVE

Faro calpestabile ad incasso in acciaio inox.
Walkable recessed light in stainless steel.

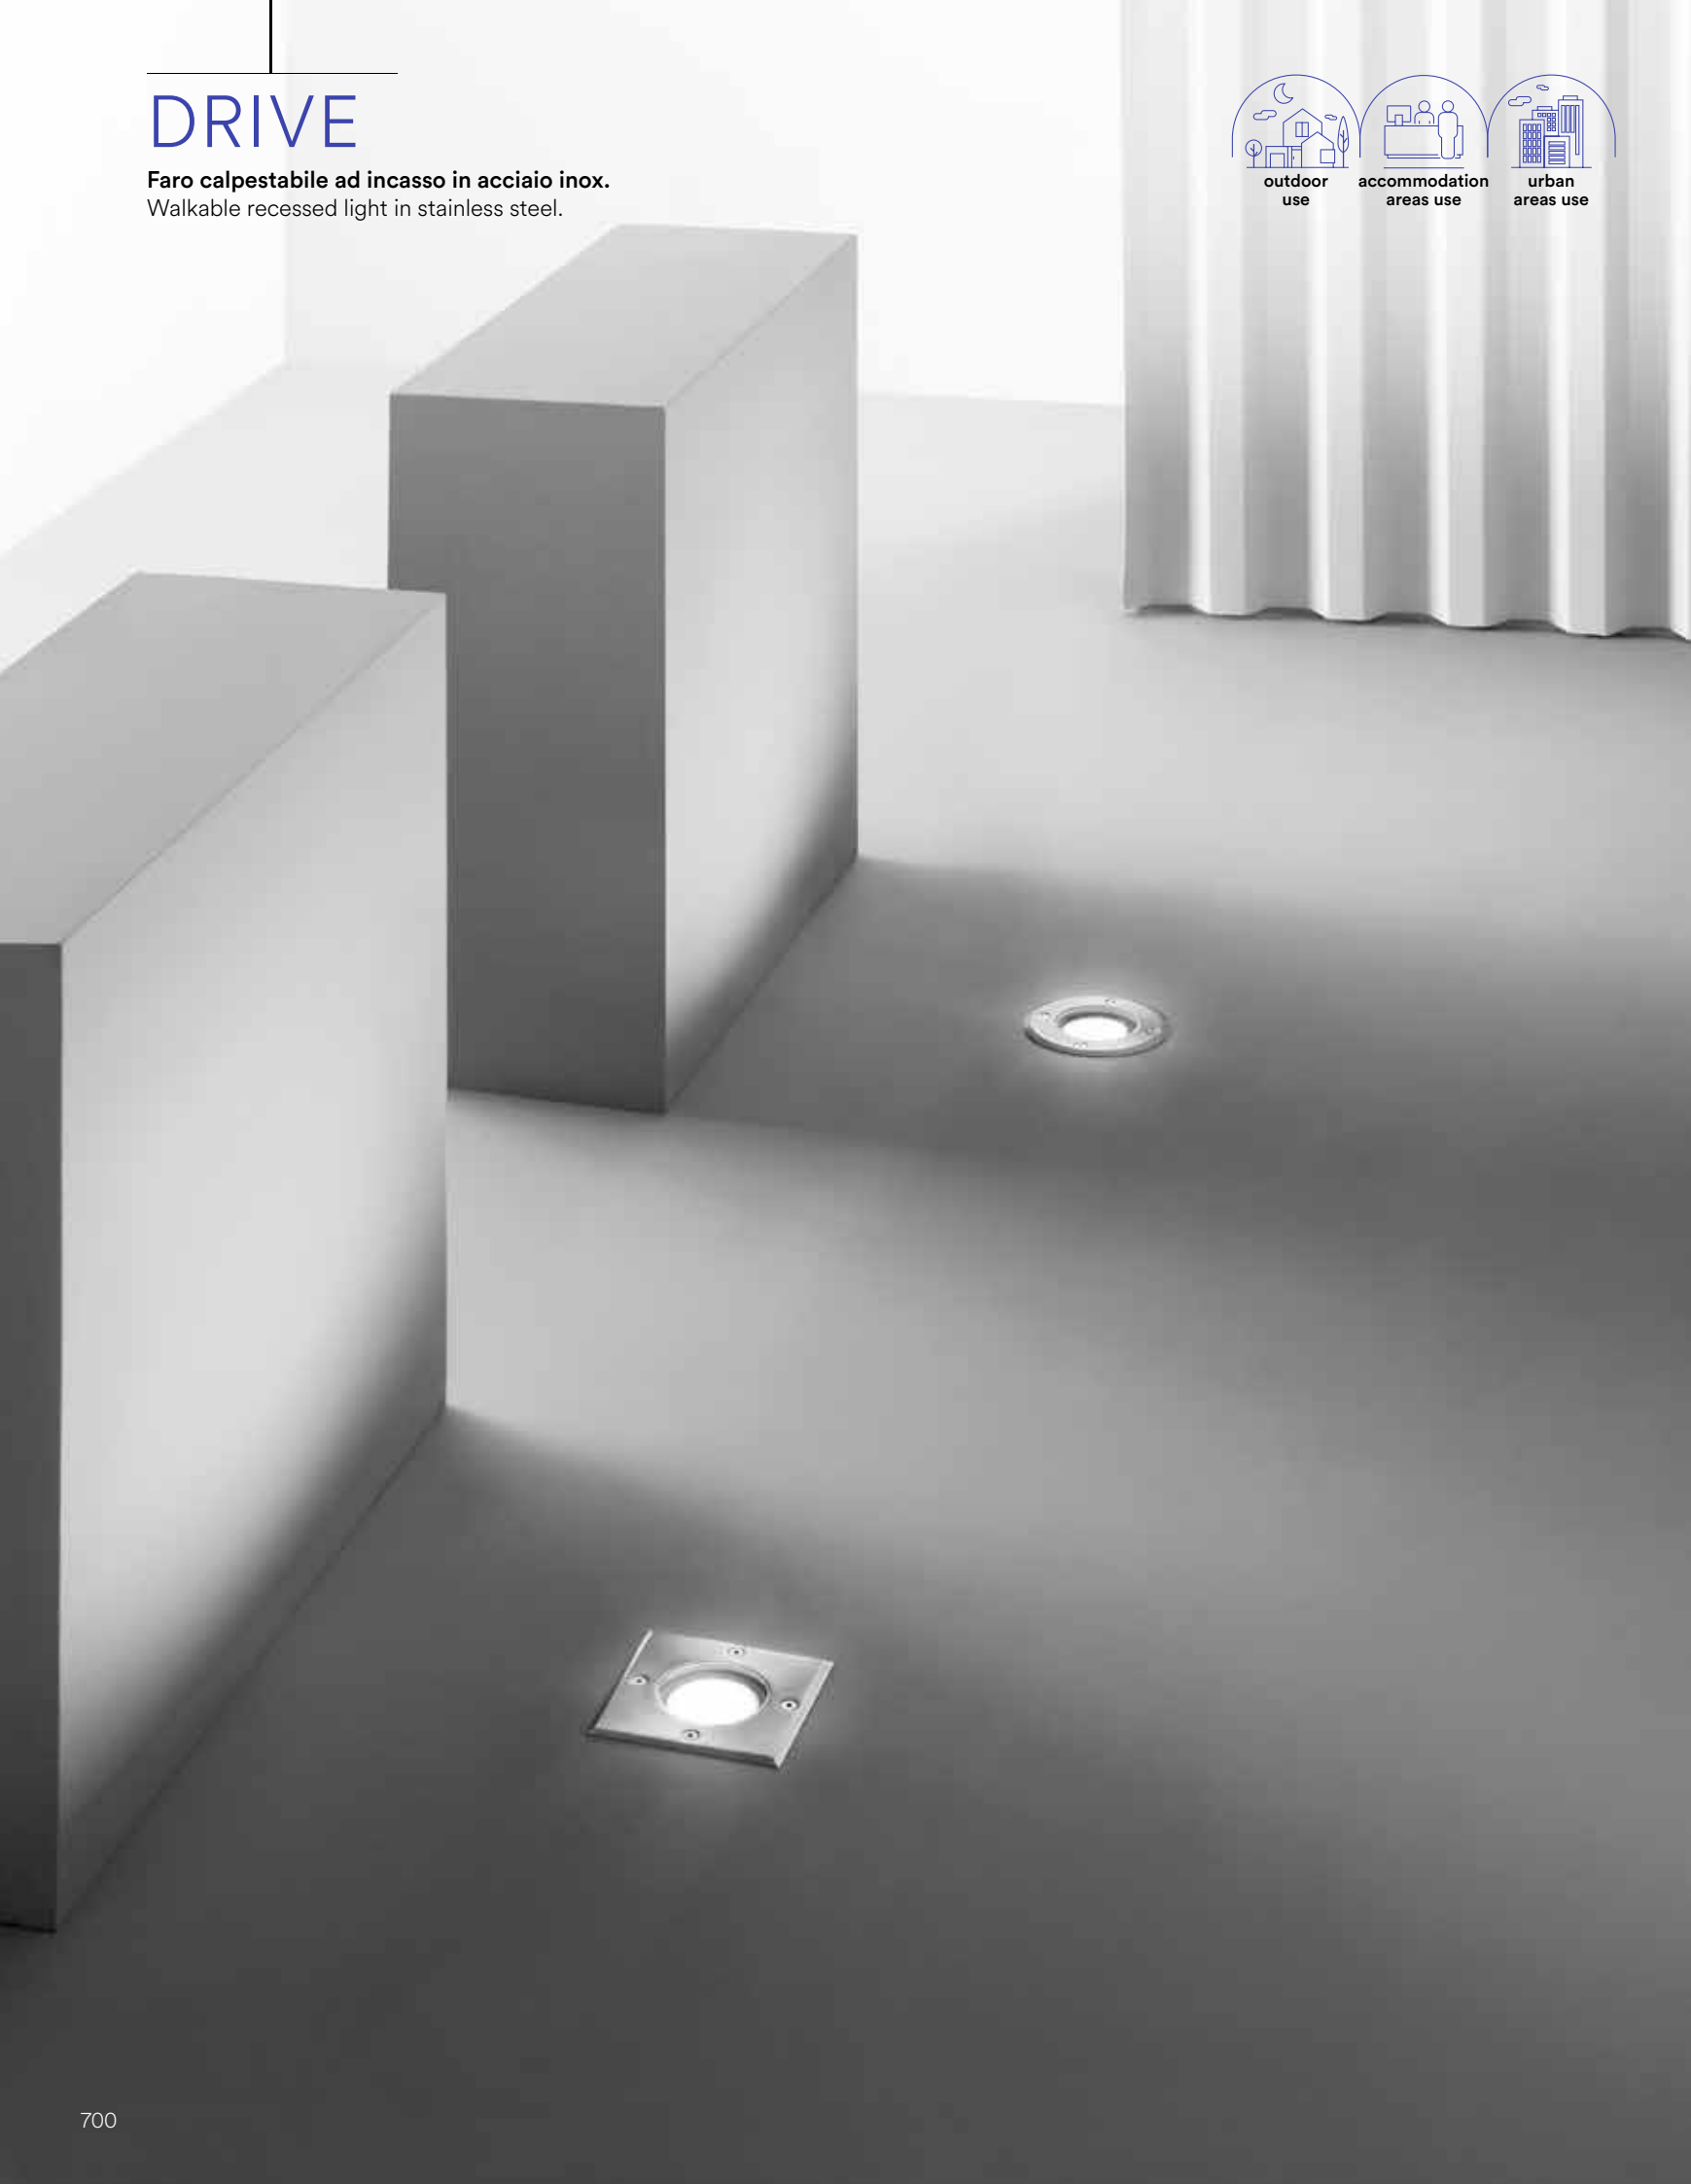





I-DRIVE-R1
8031440313261

1 x GU10 MAX 42W
pressure loads max 500 kg



recessed box



Lampadina non inclusa /
Light bulb not included






I-DRIVE-Q1
8031440313254

1 x GU10 MAX 42W
pressure loads max 500 kg



recessed box



Lampadina non inclusa /
Light bulb not included





I-DRIVE-M-R1
8031440313247

1 x GU10 MAX 42W
pressure loads max 500 kg



recessed box



Lampadina non inclusa /
Light bulb not included





I-DRIVE-E27
8031440313230

1 x E27 MAX 60W
pressure loads max 500 kg



recessed box



Lampadina non inclusa /
Light bulb not included

ELMO

Segnapassi in alluminio pressofuso.
Die-cast aluminum steplight.

Materiale

alluminio

Colore

silver



Temperatura colore

3000K / 4000K



Driver

DC 24V
tensione costante
non incluso

Material

aluminum

Colour

silver



Colour temperature

3000K / 4000K



Driver

DC 24V
constant voltage
not included



outdoor
use



accommodation
areas use



urban
areas use





LED-ELMO-R1C

8031414882823

lumen

colour temp.	colour

59 lm

LED-ELMO-R1M

8031414882830

lumen


colour temp.	colour

65 lm

watt 0,5W

beam angle 90°

pressure loads max 1000 kg



LED-ELMO-R2C

8031414882847

lumen

colour temp.	colour

116 lm

LED-ELMO-R2M

8031414882854

lumen


colour temp.	colour

121 lm

watt 1W

beam angle 90° x 2

pressure loads max 1000 kg



LED-ELMO-R4C

8031414882861

lumen

colour temp.	colour

226 lm

LED-ELMO-R4M

8031414882878

lumen


colour temp.	colour

236 lm

watt 2W

beam angle 90° x 4

pressure loads max 1000 kg



LED-ELMO-UPC

8031414897247

lumen

colour temp.	colour

360 lm

LED-ELMO-UPM

8031414897254

lumen

colour temp.	colour

380 lm

watt 3W

beam angle 180°


pressure loads max 200 kg



I-ELMO-SPK

8031414888092

Accessori inclusi /
Included accessories



x1
Cavo 30 cm /
30 cm cable

GROUND

Segnapassi in alluminio pressofuso colore antracite.
Die-cast aluminum steplight in anthracite colour.



Materiale
alluminio

Colore
antracite



**Temperatura colore
selezionabile**
3000K / 4000K



Driver
DC 24V
tensione costante
non incluso

Material
aluminum

Colour
anthracite




**Selectable color
temperature**
3000K / 4000K



Driver
DC 24V
constant voltage
not included








LED-GROUND-R1


8031414897261

lumen

colour temp.	colour
 	
730 lm	






watt	6W
beam angle	120°
pressure loads	max 2000 kg



LED-GROUND-R2


8031414897278

lumen

colour temp.	colour
 	
1460 lm	






watt	12W
beam angle	120°
pressure loads	max 2000 kg



LED-GROUND-R4

8031414897285

lumen

colour temp.	colour
 	
1960 lm	






watt	16W
beam angle	120°
pressure loads	max 2000 kg



LED-GROUND-UP


8031414897292

lumen

colour temp.	colour
 	
1480 lm	



watt	12W
beam angle	120°
pressure loads	max 1000 kg



LED-GROUND-SPK

8031414897308

ONYX

Segnapassi in alluminio pressofuso finitura nero o bianco goffrato.
Die-cast aluminum steplight in embossed black or white finish.



outdoor
use



accommodation
areas use



urban
areas use

Materiale

alluminio

Colore

bianco
nero



Temperatura colore

4000K



Driver

integrato

Material

aluminum

Colour

white
black



Colour temperature


4000K



Driver



built-in



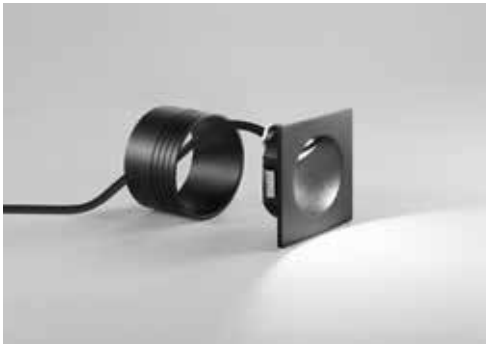



	colour temp.	colour
INC-ONYX-Q1 BCO 8031414864089		
lumen	420 lm	
INC-ONYX-Q1 NERO 8031440361262		
lumen	420 lm	
watt	2W	
beam angle	45°	
	Ø 68 mm	

recessed box



	colour temp.	colour
INC-ONYX-R1 BCO 8031440361248		
lumen	420 lm	
INC-ONYX-R1 NERO 8031440361255		
lumen	420 lm	
watt	2W	
beam angle	45°	
	Ø 68 mm	

recessed box



STRATOS

Incasso segnapassi alloggio in cassetta di derivazione 503 o 504 o 506, con mascherine in alluminio nei colori bianco, antracite, silver o corten.

Downlight for recess box 503, 504 or 506, with aluminum masks in white, anthracite, silver or corten.



outdoor
use



accommodation
areas use



urban
areas use

Materiale

alluminio

Colore

bianco
silver
nero
corten



Temperatura colore selezionabile

3000K / 4000K / 6000K



Driver

integrato

Material

aluminum

Colour

white
silver
black
corten



Selectable color temperature

3000K / 4000K / 6000K




Driver

built-in






INC-STRATOS-503
8031414888184
lumen



watt 3W
beam angle 120°




INC-STRATOS-504
8031414888221
lumen



watt 3W
beam angle 120°




INC-STRATOS-506
8031414888276
lumen




watt 5W
beam angle 120°


	colour
INC-STRATOS-503W 8031414886890	●
INC-STRATOS-503S 8031414888214	●
INC-STRATOS-503B 8031414888191	●
INC-STRATOS-503C 8031414888207	●




	colour
INC-STRATOS-504W 8031414888269	●
INC-STRATOS-504S 8031414888252	●
INC-STRATOS-504B 8031414888238	●
INC-STRATOS-504C 8031414888245	●




	colour
INC-STRATOS-506W 8031414888313	●
INC-STRATOS-506S 8031414888306	●
INC-STRATOS-506B 8031414888283	●
INC-STRATOS-506C 8031414888290	●




scatola derivazione 503
503 junction box
non inclusa / not included




scatola derivazione 503
503 junction box
non inclusa / not included



scatola derivazione 504
504 junction box
non inclusa / not included



scatola derivazione 506L
506L junction box
non inclusa / not included



SLAB

**Incasso segnapassi alloggio in cassetta di derivazione
503 o 502 o 506, con diffusore in vetro temperato bianco.**

Down light for recess box 503 or 502 or 506
with white tempered glass diffuser.



Materiale

struttura in
alluminio e diffusore
in vetro temperato

Temperatura colore selezionabile

3000K / 4000K / 5500K



Driver

integrato

Material

structure in
aluminum and
tempered glass diffuser

Selectable color temperature

3000K / 4000K / 5500K




Driver


built-in



INC-SLAB-502
8031414888177
lumen




watt 3W
beam angle 120°
Ø 60 mm




molle incluse / spring included




INC-SLAB-503
8031414864683
lumen




watt 3W
beam angle 120°
92 × 55 × 31 mm



INC-SLAB-506
8031414877232
lumen




watt 5W
beam angle 120°
163 × 60 × 50 mm



Doppio sistema di fissaggio / Double fixing system




fissaggio incasso a muro o soffitto / Recessed wall or ceiling mounting




scatola derivazione 502E
502E junction box
non inclusa / not included

scatola derivazione 503
503 junction box
non inclusa / not included



scatola derivazione 506L
506L junction box
non inclusa / not included



BREEN

Incasso segnapassi alloggio in cassetta di derivazione 503 o 506, nei colori bianco, antracite o corten goffrato.

Downlight for recess box 503 or 506 in white, anthracite or corten embossed.



indoor use



outdoor use



accommodation areas use



office use



commercial areas use

Material

polycarbonato

Colore

bianco goffrato
antracite goffrato
corten goffrato



Temperatura colore selezionabile

3000K / 4000K



Driver

integrato

Material

polycarbonate

Colour

embossed white
embossed anthracite
embossed corten



Selectable color temperature

3000K / 4000K





Driver

built-in







	colour temp.	colour
INC-BREEN-503 BCO 8031414864690		
lumen	290 lm	
INC-BREEN-503 ANT 8031414866809		
lumen	300 lm	
INC-BREEN-503 BRO 8031414888139		
lumen	290 lm	
watt	3W	



scatola derivazione 503
503 junction box
non inclusa / not included




	colour temp.	colour
INC-BREEN-506 BCO 8031414888153		
lumen	380 lm	
INC-BREEN-506 ANT 8031414888146		
lumen	380 lm	
INC-BREEN-506 BRO 8031414888160		
lumen	380 lm	
watt	4W	



scatola derivazione 506L
506L junction box
non inclusa / not included

**Doppio sistema di fissaggio /
Double fixing system**

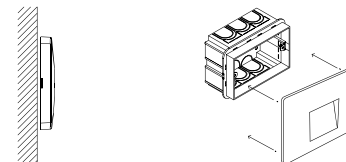

fissaggio a muro /
wall fixing

fissaggio su cassetta 503 /
fixing on box 503
non inclusa / not included

SMILE

Appliche segnapassi a LED doppio fissaggio.
Fissaggio a muro e su cassetta 502E.

Aluminum LED walk light double mounting system.
Wall or 502E junction box mounting.



Materiale

alluminio

Colore

bianco
nero



Temperatura colore selezionabile

3000K / 3500K / 4000K



Driver

integrato

Material

aluminum

Colour

white
black



Selectable color temperature

3000K / 3500K / 4000K



Driver

built-in






LED-SMILE-BCO

8031414881574

lumen

colour temp.	colour
250 lm	

watt	3W
beam angle	100°



Doppio sistema di fissaggio / Double fixing system



fissaggio a muro /
wall fixing

fissaggio su cassetta 502E /
fixing on box 502E
non inclusa / not included




LED-SMILE-ANT

8031414881567

lumen

colour temp.	colour
300 lm	

watt	3W
beam angle	100°



Doppio sistema di fissaggio / Double fixing system



fissaggio a muro /
wall fixing

fissaggio su cassetta 502E /
fixing on box 502E
non inclusa / not included

BOLT



Materiale
alluminio e
placchette in acciaio

Colore
nikel
bianco



Temperatura colore
4000K



Driver
integrato

Material
aluminum and
steel frames

Colour
nikel
white



Colour temperature
4000K



Driver
built-in

Incasso segnapassi alloggio in cassetta di derivazione 503 funzione con sensore di movimento e crepuscolare con doppia placchetta in acciaio intercambiabile nei colori nikel o bianco.

Down light for recess box 503 and double sensor function
motion and crepuscular with double interchangeable
steel frame in nickel or white colours.



INC-BOLT-503S
8031414866281
lumen

colour temp.	colour
200 lm	

watt	3W
beam angle	120°

Installare più prodotti lateralmente
ad una distanza minimo di 2 m /
Install multiple bolt 503S within
2 m of each other




Accessori inclusi / Included accessories




2x
placchette /
frames



2x
staffette /
brackets




scatola derivazione 503
503 junction box
non inclusa / not included



Non installare i prodotti uno di
fronte all'altro per possibile conflitto /
Do not install products one of facing
each other for possible conflict



Il prodotto non va installato
vicino ad una fonte di luce intensa
e costante superiore di 20 LUX /
Do not install the bolt 503S
near a light source with
intensity over 20 LUX



 5m 120° 60" Sensore di movimento regolabile / Adjustable motion sensor	 on 2 LUX off 1000 LUX Sensore crepuscolare / Crepuscular sensor
--	--



Materiale

PC e
placchette in acciaio

Colore

nikel
bianco



Temperatura colore selezionabile

3000K / 4000K / 6500K



Driver

integrato

Material

PC and
steel frames

Colour

nikel
white



Selectable color temperature

3000K / 4000K / 6500K



Driver

built-in

Incasso segnapassi alloggio in cassetta di derivazione 503 o 506L con doppia placchetta in acciaio intercambiabile nei colori nikel o bianco.


Down light for recess box 503 or 506L with double interchangeable steel frame in nickel or white colours.



INC-BOLT-503CCT

8031414881543


lumen



INC-BOLT-506CCT

8031414881550

lumen



watt	3W
beam angle	120°

watt	5W
beam angle	120°


Accessori inclusi / Included accessories





2x
placchette /
frames




2x
staffette /
brackets



scatola derivazione 503
503 junction box
non inclusa / not included








scatola derivazione 506L
506L junction box
non inclusa / not included



STEPLIGHT



Applique segnapassi a LED in termoplastica antracite.
Thermoplastic LED walk light anthracite finish.





- Materiale**
termoplastica
- Colore**
antracite goffrato
- 
- Temperatura colore**
4000K
- 
- Driver**
integrato
- Material**
thermoplastic
- Colour**
embossed anthracite
- 
- Colour temperature**
4000K
- 
- Driver**
built-in



LED-STEPLIGHT
8031414882304
lumen

colour temp.	colour
	
95 lm	

	
70 mm	50 mm 11,5 mm

watt	1W
beam angle	120°

SHELBY

Applique segnapassi a LED in alluminio antracite.
Aluminum LED walk light anthracite finish.




- Materiale**
alluminio
- Colore**
antracite goffrato
- Temperatura colore selezionabile**
3000K / 4000K
- Driver**
integrato
- Material**
aluminum
- Colour**
embossed antracite
- Selectable color temperature**
3000K / 4000K
- Driver**
built-in



LED-W-SHELBY-130
8031440361002
lumen

colour temp.	colour

445 lm




watt	4W
beam angle	120°



LED-W-SHELBY-170
8031440361019
lumen

colour temp.	colour


670 lm



watt	6W
beam angle	120°

OUTDOOR INCASSI E SEGNAPASSI / INGROUND AND WALK LIGHTS
In.tec light

OUTDOOR

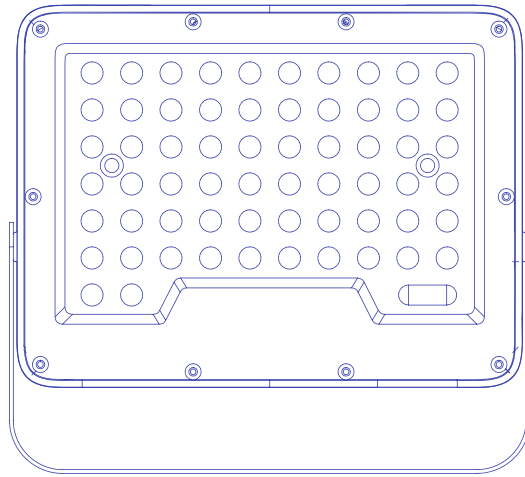

SOLARI
SOLAR LAMPS

KYOTO

Collezione in alluminio antracite con sensore e pannello solare.
Anthracite aluminum collection with sensor and solar panel.




- Materiale**
alluminio
- Colore**
antracite goffrato
-
- Temperatura colore**
4000K
-
- Driver**
integrato
- Material**
aluminum
- Colour**
embossed anthracite
-
- Colour temperature**
4000K
-
- Driver**
built-in



LED-KYOTO-AP
8031414883868
lumen

colour temp.	colour
300 lm	


watt	2,5W
beam angle	120°




LED-KYOTO-P80
8031414883875
lumen

colour temp.	colour
300 lm	

watt	2,5W
beam angle	120°



Accessori inclusi / Included accessories

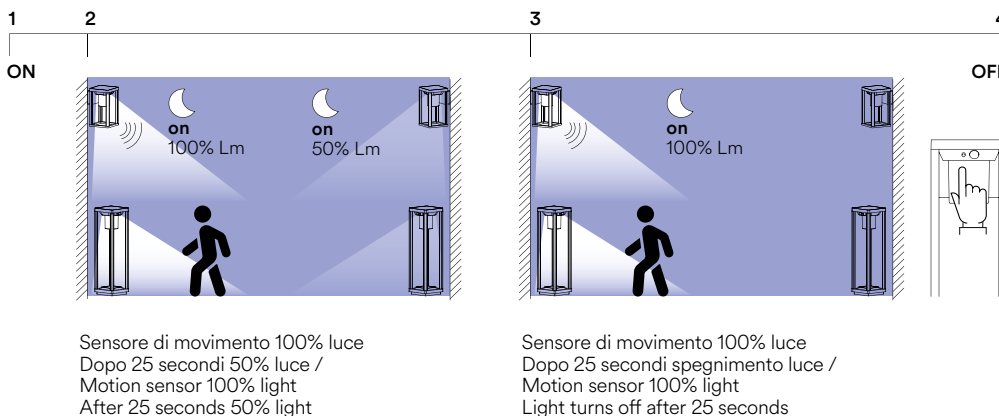

ENYA

Collezione in alluminio antracite con sensore e pannello solare.
Anthracite aluminum collection with sensor and solar panel.



Materiale
alluminio

Colore
antracite gofrato



Temperatura colore
4000K



Driver
integrato

Material
aluminum

Colour
embossed anthracite



Colour temperature
4000K




Driver
built-in



LED-ENYA-AP
8031414883844
lumen

colour temp.	colour
600 lm	


watt	5W
beam angle	120°




LED-ENYA-P80
8031414883851
lumen

colour temp.	colour
600 lm	

watt	5W
beam angle	120°



Accessori inclusi / Included accessories



Pannello solare / Solar panel




Lithium 3,7V 2200mAh
Batteria non sostituibile / Battery non replaceable



Sensore di movimento / Adjustable motion sensor

max 4m
90°
25"

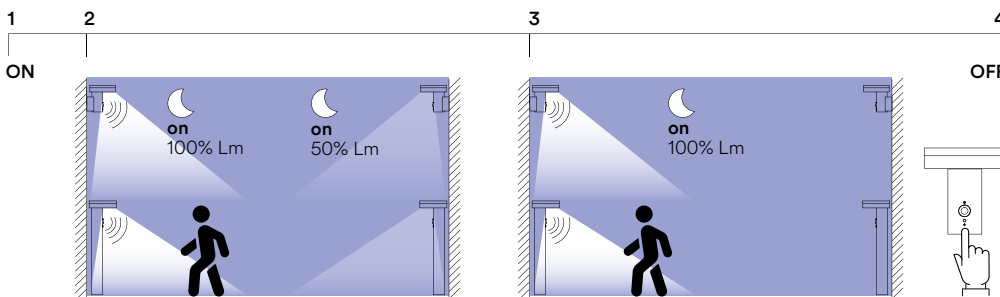

Sensore di movimento 100% luce
Dopo 25 secondi 50% luce /
Motion sensor 100% light
After 25 seconds 50% light

Sensore di movimento 100% luce
Dopo 25 secondi spegnimento luce /
Motion sensor 100% light
Light turns off after 25 seconds

TED

Applique LED in alluminio antracite con sensore e pannello solare.
Aluminum LED wall light anthracite finish with sensor and solar panel.



Materiale
alluminio

Colore
antracite



Temperatura colore
4000K



Driver
integrato

Material
aluminum

Colour
anthracite



Colour temperature
4000K




Driver
built-in



LED-TED-AP
8031414883837
lumen

colour temp.	colour
300 lm	

watt	3W
beam angle	120°



Accessori inclusi / Included accessories



Pannello solare / Solar panel




Li-ion 3,7V 2200 mAh
Batteria non sostituibile /
Battery non replaceable



max 4m
90° 25"

Sensore di movimento /
Adjustable motion sensor

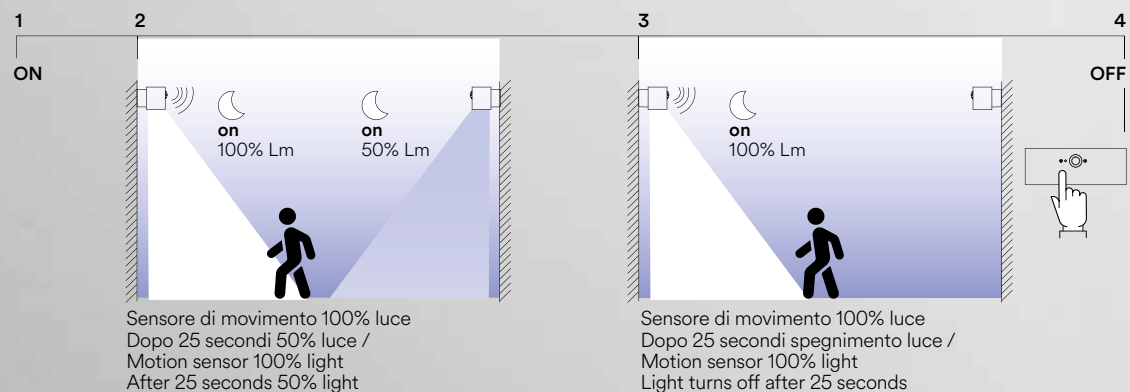

ALBERT

Applique LED in alluminio antracite con sensore e pannello solare.
Aluminum LED wall light anthracite finish with sensor and solar panel.



Materiale

alluminio

Colore

antracite



Temperatura colore

4000K



Driver

integrato

Material

aluminum

Colour

anthracite




Colour temperature

4000K



Driver

built-in



LED-ALBERT-AP

8031414058716

lumen

colour temp.



300 lm

colour



watt

2,5W

beam angle

120°



Accessori inclusi / Included accessories



Pannello solare / Solar panel




Li-ion 3,7V 2000 mAh
Batteria non sostituibile /
Battery non replaceable



max 4m
90°

25"

Sensore di movimento /
Adjustable motion sensor

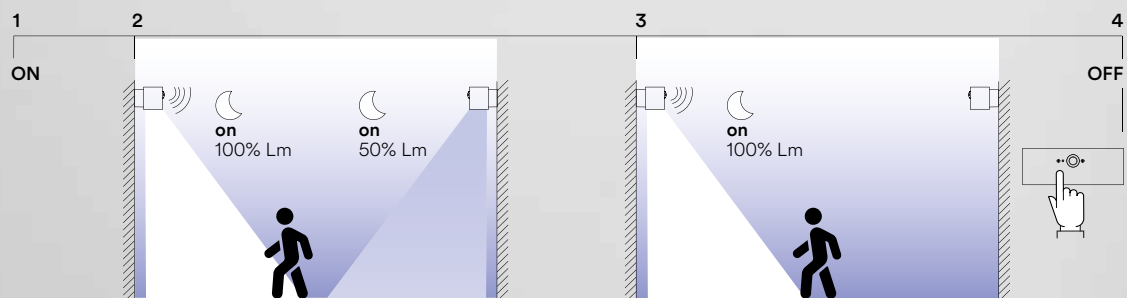

Sensore di movimento 100% luce
Dopo 25 secondi 50% luce /
Motion sensor 100% light
After 25 seconds 50% light

Sensore di movimento 100% luce
Dopo 25 secondi spegnimento luce /
Motion sensor 100% light
Light turns off after 25 seconds

In.tec light SOLARI / SOLAR LAMPS

COSMO

Proiettore a batteria in termoplastica nero con sensore di movimento regolabile.
Flood light with battery power in black thermoplastic with adjustable motion sensor.



Materiale
termoplastica

Temperatura colore

6500K



Driver
integrato

Material
thermoplastic

Colour temperature

6500K



Driver
built-in



LED-COSMO/S
8031439841263
lumen

colour temp.	colour
80 lm	

watt	1W
beam angle	120°



Accessori inclusi / Included accessories

	off 10 LUX	Sensore di movimento regolabile / Adjustable motion sensor
	on 2000 LUX	
max 8m 120°	10-60"	

Accessori non inclusi / Not included accessories


3 x 1,2V AAA
Batteria / Battery



LED-COSMO/S-FV
8031439821265
lumen

colour temp.	colour
80 lm	

watt	1W
beam angle	120°



Accessori inclusi / Included accessories

Pannello solare / Solar panel

Li-ion 3,7V 1200 mAh
Batteria non sostituibile / Battery non replaceable /

	off 10 LUX	Sensore di movimento regolabile, accensione con 15 lux / Adjustable motion sensor, switch on 15 lux
	on 2000 LUX	
max 8m 120°	10-60"	

Cavo 3,4 m / 3,4 m cable

ELIOS

Proiettore in alluminio silver con pannello solare e sensore di movimento regolabile.
Silver aluminium flood light with solar panel and adjustable motion sensor.



Materiale
alluminio

Colore
antracite



Temperatura colore
5000K



Driver
integrato

Material
aluminium

Colour
anthracite



Colour temperature
5000K




Driver
built-in



LED-ELIOS-SOLAR
8031440355124
lumen

colour temp.	colour
620 lm	

watt 9W
beam angle 120°

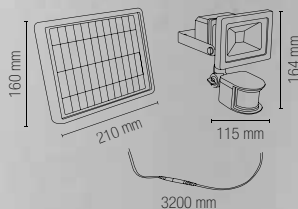

Accessori inclusi / Included accessories



Pannello solare /
Solar panel



Lithium 7,4V 1800 mAh
Batteria
non sostituibile /
Battery
non replaceable /



12m
120°


off
2 LUX

on
10-60"
2000 LUX

Sensore di movimento
regolabile /
Adjustable motion
sensor



Cavo 3,2 m /
3,2 m cable

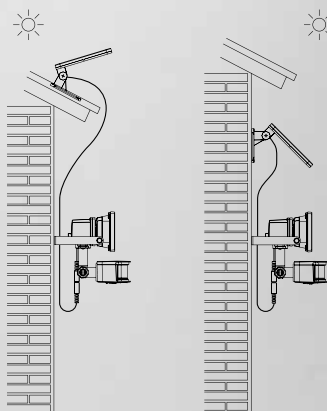

EOS

Proiettore in termoplastica silver con pannello solare, sensore di movimento e crepuscolare.

Silver thermoplastic flood light with solar panel, motion and crepuscular sensor.



Materiale

termoplastica

Colore

silver



Temperatura colore

4000K



Driver

integrato

Material

thermoplastic

Colour

silver



Colour temperature

4000K



Driver

built-in




LED-EOS-SOLAR

8031414862740

lumen

colour temp.




450 lm

watt


4W

beam angle

100°




Accessori inclusi / Included accessories



Pannello solare / Solar panel




lithium 3,9V 4400mAh
Batteria non sostituibile /
Battery non replaceable




max 6m
120°


Sensore di movimento regolabile
distanza max 6m 120° /
Adjustable motion sensor
max distance 6m 120°

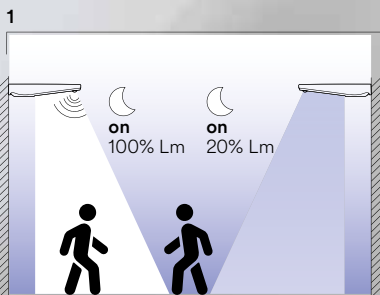

Sensore di movimento 100% luce
Sensore crepuscolare 20% luce /
Motion sensor 100% light.
Crepuscular sensor 20% light

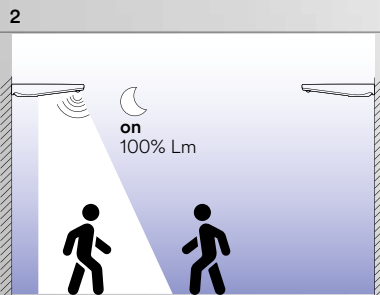

Sensore di movimento 100% luce
No sensore crepuscolare /
Motion sensor 100% light
No crepuscular sensor

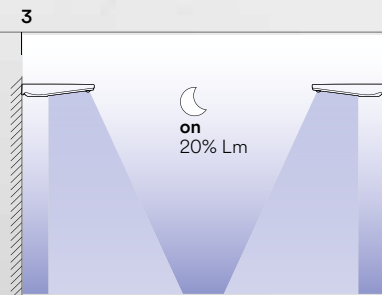

Sensore crepuscolare 20% luce
No sensore movimento /
Crepuscular sensor 20% light
No motion sensor



SKYP

Applique LED in termoplastica bianco con sensore e pannello solare.
Thermoplastic LED wall light white finish with sensor and solar panel.



Materiale

termoplastica

Temperatura colore

4000K



Driver

integrato

Material

thermoplastic

Colour temperature

4000K



Driver


built-in



LED-SKYP-AP
8031414870783
lumen

colour temp.	colour
130 lm	

watt	3W
beam angle	120°

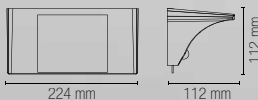

Accessori inclusi / Included accessories




Pannello solare /
Solar panel



Li-ion 3,7V 1200 mAh
Batteria non sostituibile /
Battery non replaceable /



Sensore di movimento,
accensione con 15 lux /
Motion sensor,
switch on 15 lux



Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile /
Easy-up base for double use of the lamp, as wall and portable lamp

OPEN

Applique LED in termoplastica bianco con sensore e pannello solare.
Thermoplastic LED wall light white finish with sensor and solar panel.



Materiale

termoplastica

Temperatura colore

4000K



Driver

integrato

Material

thermoplastic

Colour temperature

4000K



Driver

built-in




LED-OPEN-AP

8031414870752

lumen

colour temp. colour





300 lm

watt

3W

beam angle

120°



ON/OFF

Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile / **Easy-up base** for double use of the lamp, as wall and portable lamp



Accessori inclusi / Included accessories



Pannello solare / Solar panel



Li-ion 1200 mAh

Batteria non sostituibile / Battery non replaceable /



4-6m
100°



off
15 LUX

on
<15 LUX

Sensore di movimento regolabile, accensione con 15 lux / Adjustable motion sensor, switch on 15 lux



ARGO

Proiettore in alluminio antracite con diffusore in acrilico con pannello solare, sensore di movimento e crepuscolare.

Anthracite aluminum flood light with acrylic diffuser, solar panel, motion and crepuscular sensor.




- Materiale**
alluminio e acrilico
- Colore**
antracite
- Temperatura colore**
4000K
- Driver**
integrato
- Material**
aluminum and acrylic
- Colour**
anthracite
- Colour temperature**
4000K
- Driver**
built-in



LED-ARGO-SOLAR
8031414865345
lumen

colour temp.	colour
130 lm	

watt	1,8W
beam angle	120°

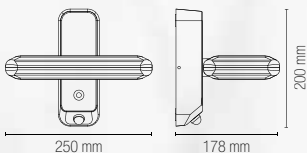

Accessori inclusi / Included accessories



Pannello solare / Solar panel




Li-ion 3,7V 2200 mAh
Batteria non sostituibile / Battery non replaceable /



5m 100°
30"
on 130Lm 1,5 hours

Sensore di movimento / Motion sensor

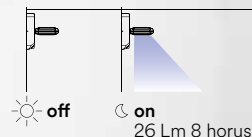

Sensore crepuscolare / Crepuscular sensor

SHIVA

Proiettore in termoplastica antracite con pannello solare e sensore di movimento.
Anthracite thermoplastic flood light with solar panel and motion sensor.



- Materiale**
termoplastica
- Colore**
antracite
- Temperatura colore**
4000K
- Driver**
integrato
- Material**
aluminum and acrylic
- Colour**
anthracite
- Colour temperature**
4000K
- Driver**
built-in



LED-SHIVA-SOLAR

8031414870769

lumen

colour temp. colour



230 lm

watt

2 x 1,5W

beam angle

120°




Accessori inclusi / Included accessories



Pannello solare / Solar panel




Li-ion 3,7V 1200 mAh
Batteria non sostituibile / Battery non replaceable /



Sensore di movimento accensione <15 lux / Motion sensor switch on <15 lux



Cavo 1,9 m / 1,9 m cable



Base easy-up che permette il duplice utilizzo del faro come lampada da muro e lampada portatile / **Easy-up base** for double use of the lamp, as wall and portable lamp



3 x 1,2V AAA
non inclusa / not included

Doppia funzione: auto-ricarica con pannello solare o alimentazione con pile AAA (non incluse) / **Double function:** auto recharge by solar panel or power by AAA battery (not included)

ULYSSE

Proiettore in termoplastica antracite con pannello solare e sensore di movimento regolabile.

Anthracite thermoplastic flood light with solar panel and adjustable motion sensor.



Materiale

termoplastica

Colore

antracite



Temperatura colore

4000K



Driver

integrato

Material

thermoplastic

Colour

anthracite



Colour temperature

4000K



Driver

built-in




LED-ULYSSE-SOLAR

8031414882588

lumen

colour temp.	colour
1000 lm	

watt	10W
beam angle	120°



Accessori inclusi / Included accessories



Pannello solare / Solar panel



lithium 3,7V 3000 mAh
Batteria non sostituibile / Battery non replaceable





8m / 110°
10-60"
on 600Lm / 1 hours

Sensore di movimento e crepuscolare regolabili / Adjustable motion and crepuscular sensor



Cavo 2 m / 2 m cable

Doppio sistema di montaggio / Double mounting system

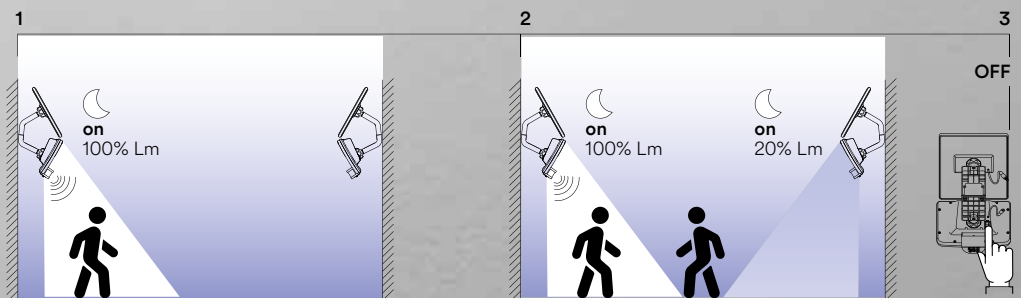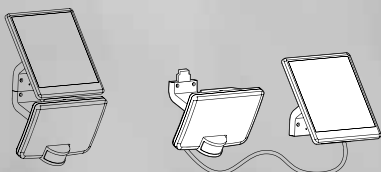

1
Sensore di movimento 100% di luce
No sensore crepuscolare /
Motion sensor 100% light
No crepuscular sensor

2
Sensore di movimento 100% luce
Sensore crepuscolare 20% luce /
Motion sensor 100% light
Crepuscular sensor 20% light

3
OFF

GLASER

Glaser è il proiettore a batteria con ricarica solare.
Un dispositivo pratico ed efficiente per l'illuminazione sostenibile.
Glaser is the battery-powered floodlight with solar charging.
A practical and efficient device for sustainable lighting.



Materiale
alluminio

Colore
silver

Temperatura colore
3000K / 4000K



Material
aluminum


Colour
silver

Colour temperature
3000K / 4000K





	colour temp.	colour
LED-GLASER-SOL100C 8031414917082		
lumen	1200 lm	
LED-GLASER-SOL100M 8031414917075		
lumen	1200 lm	
beam angle		120°

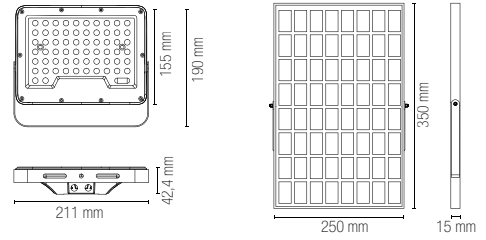

entrata cavo DC / DC connector


Accessori inclusi / Included accessories



Li-ion 3.2V 10Ah
Batteria non sostituibile / Battery non replaceable



	colour temp.	colour
LED-GLASER-SOL200C 8031414917105		
lumen	1800 lm	
LED-GLASER-SOL200M 8031414917099		
lumen	1800 lm	
beam angle		120°

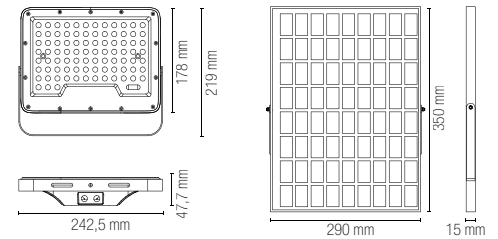

entrata cavo DC / DC connector


Accessori inclusi / Included accessories



Li-ion 3.2V 15Ah
Batteria non sostituibile / Battery non replaceable



	colour temp.	colour
LED-GLASER-SOL400C 8031414917129		
lumen	3500 lm	
LED-GLASER-SOL400M 8031414917112		
lumen	3500 lm	
beam angle		120°

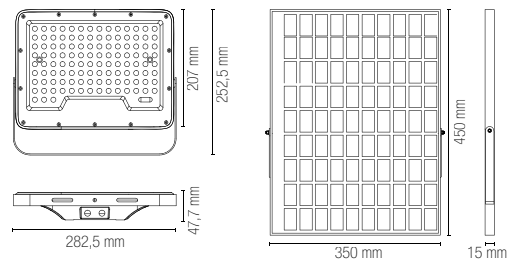


entrata cavo DC / DC connector

Accessori inclusi / Included accessories



Li-ion 3.2V 24Ah
Batteria non sostituibile / Battery non replaceable

Accessori inclusi / Included accessories



Pannello solare / Solar panel



Batteria non sostituibile / Battery non replaceable



Telecomando / Remote control

Accessorio non incluso / Not included accessory

LED-GLASER-CABLE
8031414917136

Cavo 2 m per pannello solare con attacco maschio/femmina / 2 m extension cable for solar panel with male/female



LUXOR

Lampione solare LUXOR, versatile con doppia opzione di installazione come applique o palo.

LUXOR solar streetlight, versatile with dual installation options as a sconce or a pole.

Materiale

PC

Colore

antracite



Temperatura colore

3000K / 4000K



Material

PC


Colour

anthracite



Colour temperature

3000K / 4000K



LED-LUXOR-6C-SOLAR

8031414921898

lumen

colour temp.



600 lm

colour



LED-LUXOR-6M-SOLAR

8031414921904

lumen

colour temp.



600 lm

colour



watt

6,5W

beam angle

90° x 110°

Accessori inclusi / Included accessories





Pannello solare / Solar panel



Li-ion 3.7V 5.4AH

Batteria non sostituibile / Battery non replaceable /

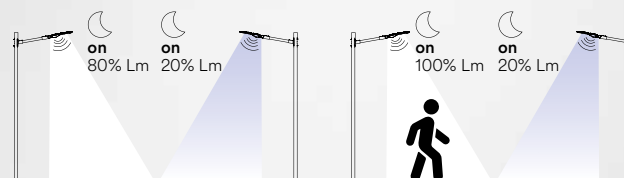


Interruttore per due funzioni / Switch for two functions

1. Sensore crepuscolare
ON 100% luce per 10 min
Dopo 2 ore graduale riduzione fino al 10% luce /
Crepuscular sensor
ON 100% light for 10 min
After 2 hours gradual reduction to 10% light

2. Sensore di movimento
ON 100% luce
Dopo 20 secondi 20% luce /
Motion sensor
ON 100% light
After 20 seconds 20% light

OUTDOOR

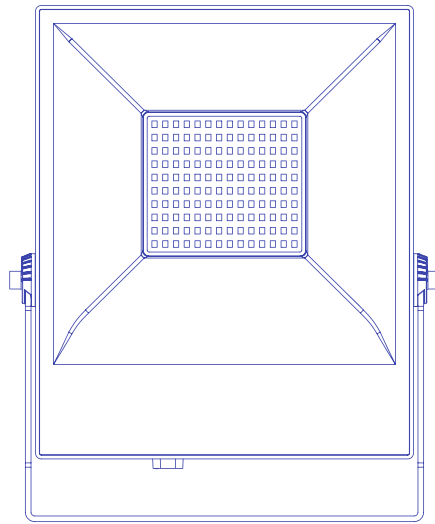

PROIETTORI
FLOOD LIGHTS



Proiettore con telecamera di sicurezza colore antracite con funzione smart Wi-Fi, compatibili con dispositivi iOS, android e VOICE CONTROL.

Flood light with security camera, anthracite, smart Wi-Fi, compatible with iOS devices, android and VOICE CONTROL devices.



Materiale
alluminio + PC

Colore
antracite



Temperatura colore
4000K



Driver
integrato

Material
aluminium + PC


Colour
anthracite



Colour temperature
4000K



Driver
built-in

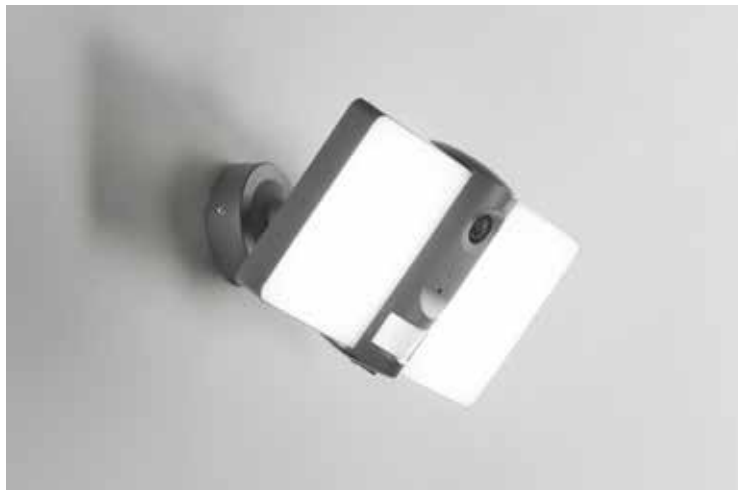

LED-VYSOR-SECURITY

8031414871810

lumen

colour temp. | colour




2640 lm

watt



20W

beam angle

120°

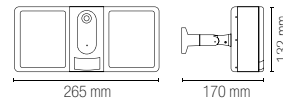

☾ on <100 LUX PIR
☽ off >100 LUX PIR

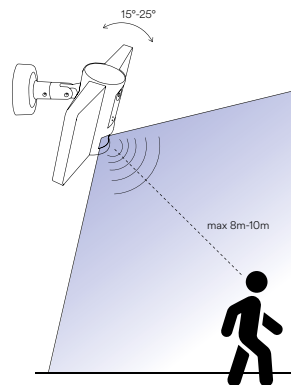

Tipo di sensore video
Video sensor type

Pixel

Illuminazione minima
Min illuminance

Angolo vista camera
Camera view angle

Otturatore
Shutter

Infrarossi
IR

WDR

Video compression standard

Risoluzione video
Max picture size

Frequenza fotogrammi
Frame rate

Audio

Memoria (non inclusa)
Storage (not included)

Impostazione immagine
Image setting

Reset

Controllo della luce
Lighting control

Interfaccia di protocollo
Interface protocol

Comunicazione di protocollo
Communication protocol

Funzioni generali
General function

Wi-Fi

PIR

1/2,9" CMOS

2.0 Mega

Color 0.10lux @F2.0,
black and white 0.01lux @F2.0

135°

1/25-1/100,000 per second

High power LED with ICR

Digital WDR

H.264
32Kbps - 2Mbps

1920x1080

1-20 per second

Full duplex audio (doppio sistema di comunicazione)

Support SD card (MAX 128Gb) Cloud storage NVR

Support HD/SD; support mirror

Support

Support manual, sensor, plan switch light (gestione accensioni)

Private

TCP/IP, HTTP, DHCP, DNS, RTSP

Dual stream, password protection

IEEE802.11b/g/n

Support PIR and motion detection

Control system easy installation

Full duplex audio



Smart Intec
WIFI




RF 2.4G
control system




ALEXA e
GOOGLE HOME
voice control



compatible with
AMAZON ECHO SHOW
GOOGLE CHROME CAST



BANNER

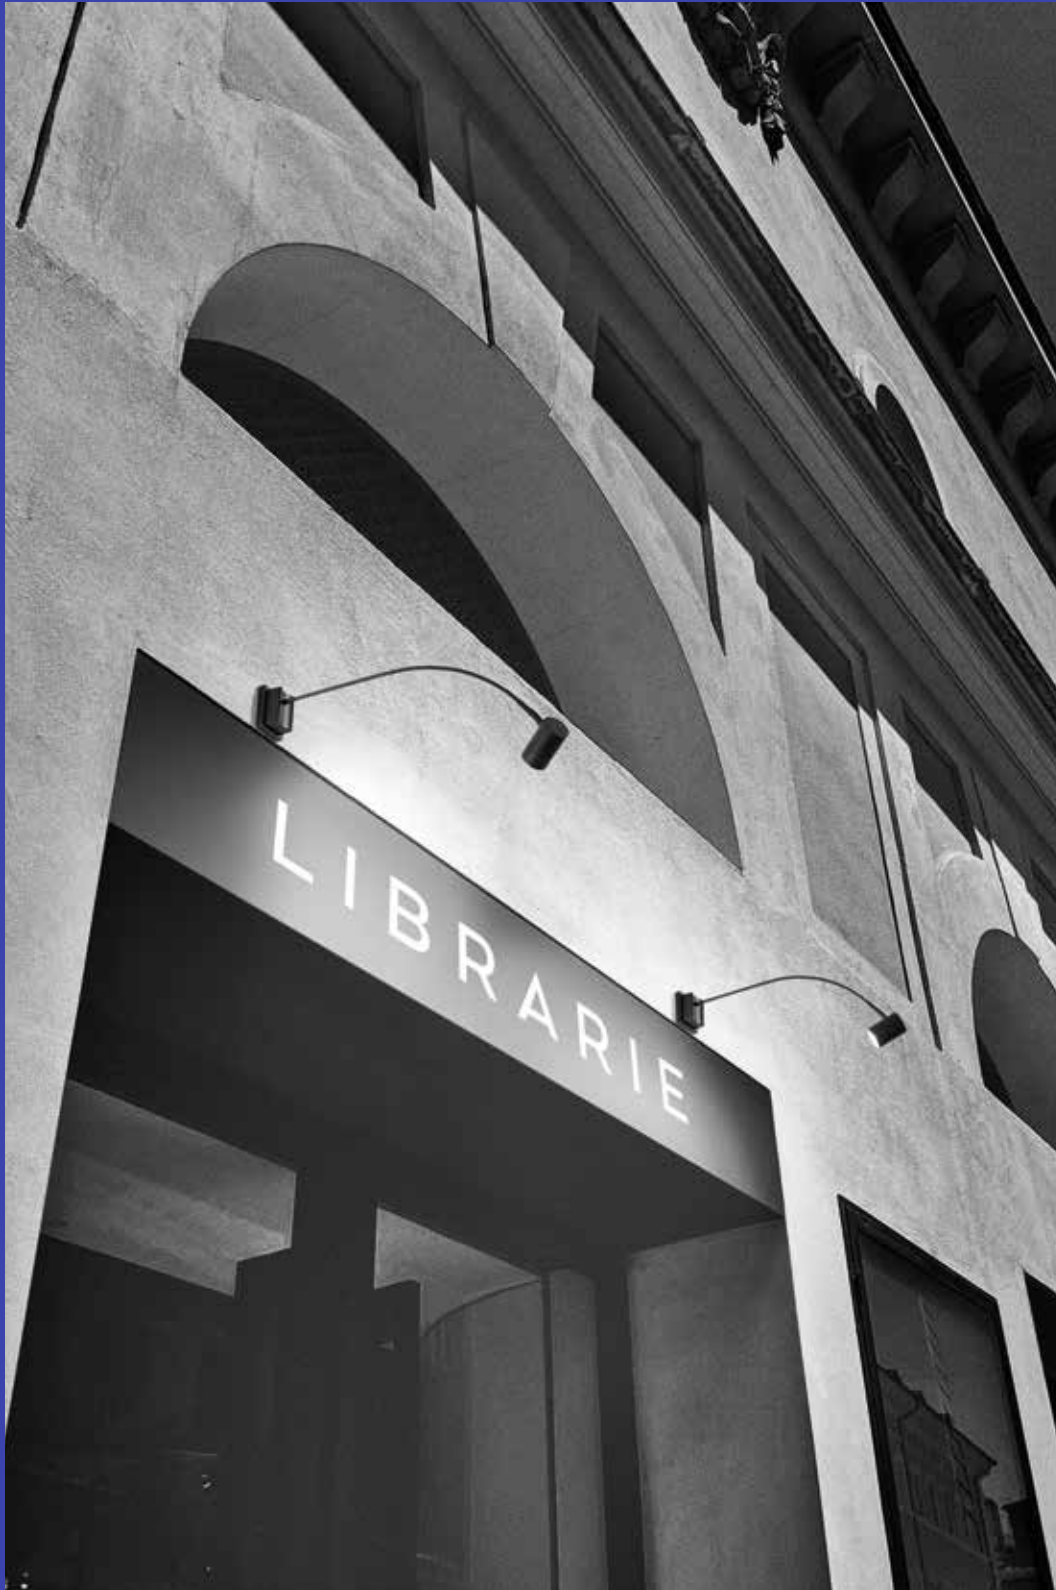



Materiale
metallo

Colore
nero satinato




Material
metal

Colour
satin black



Proiettore in metallo nero satinato con struttura flessibile e punto luce orientabile.
Black satin metal projector with flexible structure and adjustable light point.

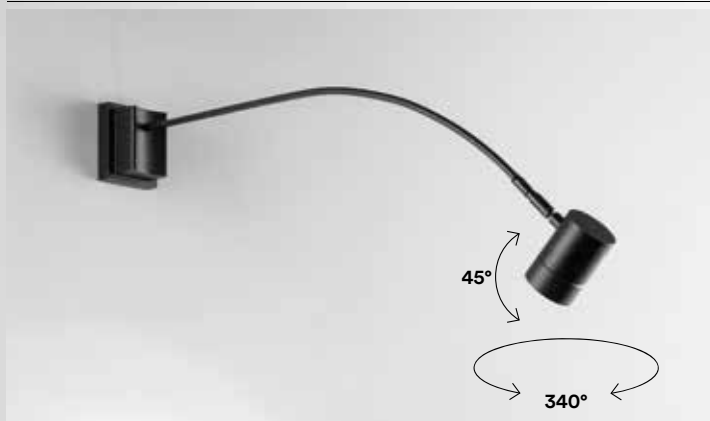

colour


I-BANNER-AP
8031414883004



1 x GU10 MAX 35W




Lampadina non inclusa /
Light bulb not included

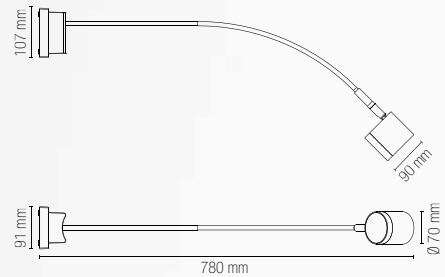

SAT





Materiale
termoplastica

Colore
antracite



Temperatura colore
4000K



Driver
integrato

Material
thermoplastic

Colour
anthracite



Colour temperature
4000K



Driver
included

Proiettore in termoplastica LED integrato finitura antracite con diffusore in acrilico con sensore di movimento e crepuscolare regolabile.

Built-in LED thermoplastic flood lamp anthracite finish with acrylic diffuser with adjustable night and motion sensor.



LED-SAT-10
8031414868261
lumen

colour temp.	colour
1200 lm	

watt 10W
beam angle 120°



LED-SAT-20
8031414868278
lumen

colour temp.	colour
2400 lm	

watt 2 x 10W
beam angle 120°

Accessori inclusi / Included accessories

Sensore di movimento regolabile / Adjustable motion sensor

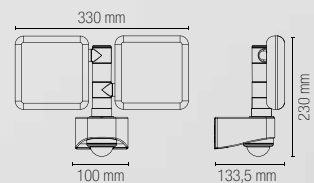

AXEL

Proiettore in alluminio LED integrato finitura bianco o silver goffrato.
Built-in LED aluminium flood lamp embossed white or silver finish.



Materiale

alluminio
diffusore acrilico

Colore

bianco goffrato
silver goffrato



Temperatura colore

3000K / 4000K



Driver

integrato

Material

aluminium
acrylic diffuser

Colour

embossed white
embossed silver



Colour temperature

3000K / 4000K




Driver

built-in






AXEL

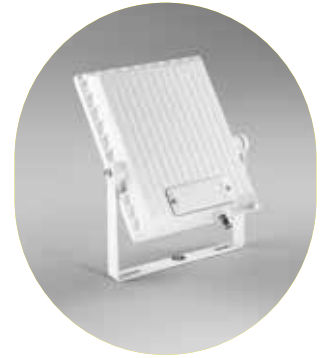


LED-AXEL-10-BCO
8031414918744

	colour temp.	colour
lumen	1100 lm	
watt		10W
beam angle		100°
pf		-




LED-AXEL-20-BCO
8031414918751

	colour temp.	colour
lumen	2200 lm	
watt		20W
beam angle		100°
pf		-




LED-AXEL-50-BCO
8031414918768


	colour temp.	colour
lumen	5500 lm	
watt		50W
beam angle		100°
pf		0.90




Fotometria del prodotto / Photometric curve



LED-AXEL/10W



LED-AXEL/20W



LED-AXEL/50W



LED-AXEL-10-SIL

8031414918676


lumen

colour temp. | colour



1100 lm

watt	10
beam angle	100°
pf	-



LED-AXEL-20-SIL

8031414918683


lumen

colour temp. | colour



2200 lm

watt	20W
beam angle	100°
pf	-



LED-AXEL-30-SIL

8031414918690


lumen

colour temp. | colour



3300 lm

watt	30W
beam angle	100°
pf	0.90



LED-AXEL-50-SIL

8031414918706


lumen

colour temp. | colour




5500 lm


watt	50W
beam angle	100°
pf	0.90




Fotometria del prodotto / Photometric curve




LED-AXEL/10W



LED-AXEL/20W



LED-AXEL/30W




LED-AXEL/50W

AXEL SENSOR

Proiettore in alluminio LED integrato finitura silver con sensore di movimento e crepuscolare regolabile.

Built-in LED aluminium flood lamp embossed silver finish with adjustable night and motion sensor.



Materiale

alluminio

Colore

silver gofrato

Temperatura colore

3000K / 4000K



Driver

integrato

Material

aluminium

Colour

embossed silver

Colour temperature

3000K / 4000K



Driver

built-in



Accessori inclusi / Accessories included


Sensore di movimento regolabile / Adjustable motion sensor




LED-AXEL-S10-SIL

8031414918713

lumen




1100 lm



LED-AXEL-S/10W

watt 10W
beam angle 110°



Accessori inclusi / Accessories included


Sensore di movimento regolabile / Adjustable motion sensor




LED-AXEL-S30-SIL

8031414918737

lumen




3300 lm



LED-AXEL-S/30W

watt 30W
beam angle 110°



AXEL PORTABLE

Proiettore LED portatile.
LED portable flood light.



Materiale
alluminio

Colore
giallo/nero



Temperatura colore
3000K / 4000K



Driver
integrato

Material
aluminium

Colour
yellow/black




Colour temperature
3000K / 4000K




Driver
built-in



PROIETTORI / FLOOD LIGHTS
In.tec light




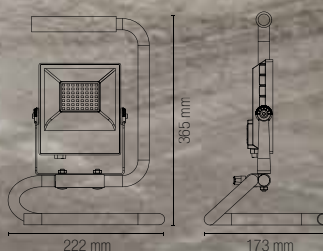

**Accessori inclusi /
Included accessories**

 Cavo 1,6 metri
con spina /
1,6 meter cable
with plug



LED-AXEL-P20-NER
8031414918720
lumen

colour temp. colour

2200 lm



LED-AXEL-P/20W
watt 20W
beam angle 110°

BULL

La collezione Bull presenta i proiettori portatili a batteria, disponibili in due versioni: con e senza bluetooth integrato.

The Bull collection presents battery-powered portable projectors, available in two versions: with and without built-in Bluetooth.



Materiale

plastica

Colore

giallo/nero



Temperatura colore

6500K



Driver

integrato

Material

plastic

Colour

yellow/black



Colour temperature

6500K



Driver

built-in



LED-BULL-15DJ

8031414917167

lumen

colour temp.



1200 lm

colour




watt

15W

beam angle

90°

switch DIMMER 25% 50% 70% 100% OFF



LED-BULL-10

8031414917150

lumen

colour temp.



1000 lm

colour




watt

10W

beam angle

90°

switch DIMMER 25% 50% 70% 100% OFF



SPEAKER

2x5W connessione bluetooth 4.2 max 10 m /
2x5W bluetooth 4.2 connection max 10 m

Accessori inclusi / Included accessories



USB

Cavo per ricarica 60 cm /
60 cm charging cable



3.7V/6600 mAh

Batteria ricaricabile, non sostituibile /
Rechargeable battery, non replaceable

Accessori inclusi / Included accessories



USB

Cavo per ricarica 60 cm /
60 cm charging cable



3.7V/6600 mAh

Batteria ricaricabile, non sostituibile /
Rechargeable battery, non replaceable



Adattatore non incluso /
Adaptor not included



KNOX

Realizzato in plastica e alluminio, Knox è un proiettore con temperatura selezionabile e con doppia presa schuko.

Made of plastic and aluminum, Knox is a fixture with selectable temperature and dual schuko plugs.



Materiale

plastica

Colore

giallo/nero



Temperatura colore

6500K

Driver

integrato

Material

plastic

Colour

yellow/black



color


temperature

6500K

Driver

built-in





LED-KNOX-45

8031414917174

lumen

2500 - 4959 lm

colour temp.



colour



watt

45W

beam angle

120°




Plug 2X max 15A 250V 2500W



Accessori inclusi / Included accessories



Cavo 3 metri con spina /
3 meter cable with plug

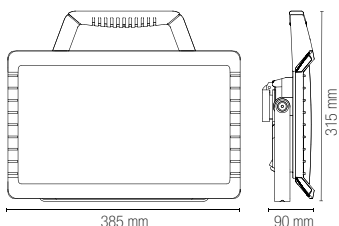

LED-KNOX-80

8031414917181

lumen

4600 - 9200 lm

colour temp.



colour



watt

80W

beam angle

120°




Plug 2X max 15A 250V 2500W



Accessori inclusi / Included accessories



Cavo 3 metri con spina /
3 meter cable with plug

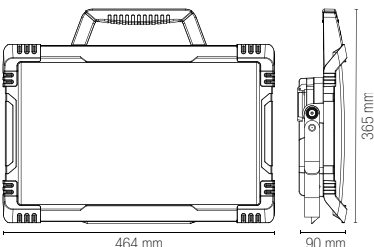

ATHOS

Proiettore a led integrato in alluminio silver e diffusore satinato.
Built-in LED aluminium flood lamp silver finish with satin diffuser.



Materiale
alluminio

Material
aluminium

Colore
silver

Colour
silver



Temperatura colore
4000K / 6000K

Colour temperature
4000K / 6000K



Driver
integrato

Driver
built-in





LED-ATHOS-100

8031414884186

lumen

colour temp. colour



10115 lm

LED-ATHOS-100F

8031414884193

lumen




9624 lm

watt 100W

beam angle 120°

pf 0.90



LED-ATHOS-150

8031414884209

lumen

colour temp. colour



14557 lm

LED-ATHOS-150F

8031414884216

lumen




14388 lm

watt 150W

beam angle 120°

pf 0.90

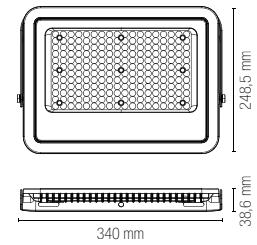

LED-ATHOS-200

8031414884223

lumen

colour temp. colour



20371 lm

LED-ATHOS-200F

8031414884230

lumen




20310 lm


watt 300W

beam angle 120°


pf 0.90

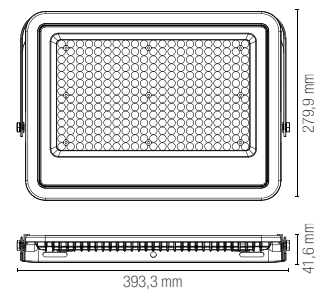


Fotometria del prodotto / Photometric curve



LED-ATHOS-100



LED-ATHOS-150



LED-ATHOS-200

TAURUS

Proiettore a led integrato in alluminio nero diffusore in vetro temperato.
Built-in LED aluminium flood lamp black aluminium body with tempered glass diffuser.



Materiale
alluminio

Colore
nero



Temperatura colore
4000K / 6500K



Driver
integrato

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminium

Colour
black



Colour temperature
4000K / 6500K




Driver
built-in


Life time and on/off
50.000 h
>25.000 on/off




Fotometria del prodotto / Photometric curve




LED-TAURUS-70



LED-TAURUS-100




LED-TAURUS-150




LED-TAURUS-200




	colour temp.	colour
LED-TAURUS-70 8031414875757 lumen		
	8400 lm	
LED-TAURUS-70F 8031414876662 lumen		
	8400 lm	
watt	70W	
beam angle	110°	
pf	0.90	




	colour temp.	colour
LED-TAURUS-100 8031414875764 lumen		
	12000 lm	
LED-TAURUS-100F 8031414876631 lumen		
	12000 lm	
watt	100W	
beam angle	110°	
pf	0.90	

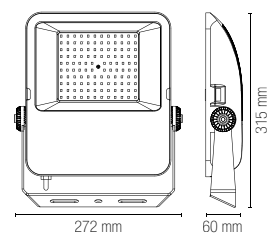

	colour temp.	colour
LED-TAURUS-150 8031414875771 lumen		
	18000 lm	
LED-TAURUS-150F 8031414876648 lumen		
	18000 lm	
watt	150W	
beam angle	110°	
pf	0.90	

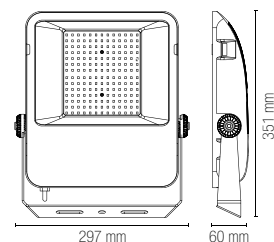

	colour temp.	colour
LED-TAURUS-200 8031414875788 lumen		
	26000 lm	
LED-TAURUS-200F 8031414876655 lumen		
	26000 lm	
watt	200W	
beam angle	110°	
pf	0.90	

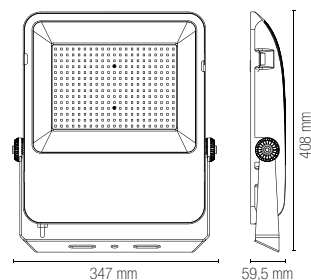



I-FRAME-L-BCO

8031440364577

Staffa fissaggio angolare
colore bianco

Metal corner wall
arms white color



I-FRAME-L-GR

8031440361880

Staffa fissaggio angolare
colore grigio

Metal corner wall
arms gray color



I-FRAME-V-BCO

8031440364553

Staffa V mobile 30°
fissaggio parete
colore bianco

Metal wall arms
orientable 30°
white color



I-FRAME-V-GR

8031440364584

Staffa V mobile 30°
fissaggio parete
colore grigio

Metal wall arms
orientable 30°
gray color



I-TRIPOD

8031440361729

Accessori per proiettori
Sistema di fissaggio
singolo e doppio


Flood light accessories
Single and double
connection system

**Accessori inclusi /
Included accessories**



Cavo 2,8 metri
con spina /
2,8 meter cable
with plug

IP44

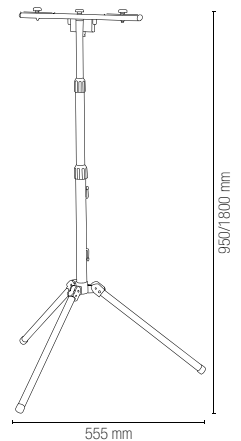


I-SPIKE-ANT

8031414877973

Picchetto alluminio
antracite

Anthracite aluminum
spike





GIOVE

Proiettore LED integrato struttura in alluminio pressofuso e diffusore in vetro temperato.

Built-in LED floor light die-cast aluminium body and tempered glass diffuser.



Materiale

alluminio

Colore

nero



Temperatura colore

6000K



Driver

incluso

Durata e on/off

50.000 h
>25.000 on/off

Material

aluminium

Colour

black



Colour temperature

6000K



Driver


included

Life time and on/off


50.000 h
>25.000 on/off




Fotometria del prodotto
Photometric curve




LED-GIOVE-100



LED-GIOVE-200




LED-GIOVE-300

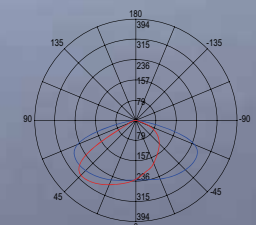


LED-GIOVE-400




	colour temp.	beam angle	colour
LED-GIOVE-100 8031414882557		150° x 80°	
lumen	15670 lm		
watt			100W
pf			0.90

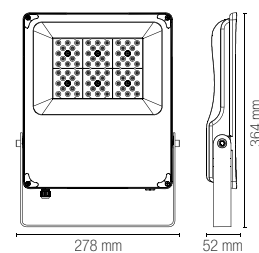


	colour temp.	beam angle	colour
LED-GIOVE-200 8031414876365		150° x 80°	
lumen	32666 lm		
LED-GIOVE-200-30 8031414885138		30°	
lumen	32666 lm		
LED-GIOVE-200-60 8031414885145		60°	
lumen	32666 lm		
LED-GIOVE-200R-30 8031414885152		30°	
lumen	RED		
LED-GIOVE-200R-60 8031414885169		60°	
lumen	RED		
LED-GIOVE-200V-30 8031414885176		30°	
lumen	GREEN		
LED-GIOVE-200V-60 8031414885183		60°	
lumen	GREEN		
watt			200W
pf			0.90

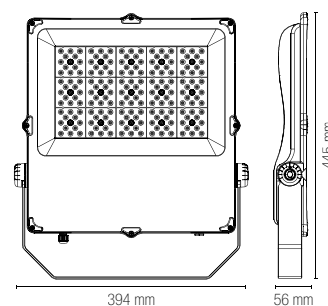

	colour temp.	beam angle	colour
LED-GIOVE-300 8031414876372		150° x 80°	
lumen	47150 lm		
watt			300W
pf			0.90

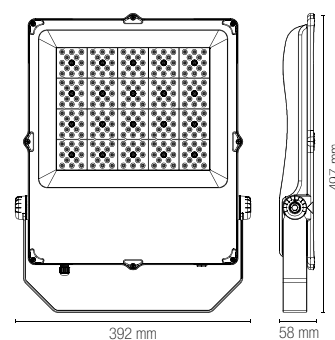

	colour temp.	beam angle	colour
LED-GIOVE-400 8031414876389		150° x 80°	
lumen	66031 lm		
watt			400W
pf			0.90

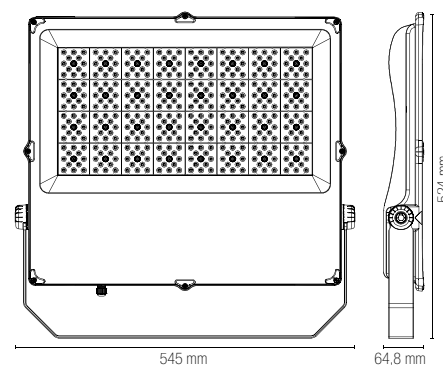

MASTER



Proiettore LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.
 Built-in LED floor light die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material.



Materiale
alluminio

Colore
nero



Temperatura colore
5700K



Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminium

Colour
black



Colour temperature
5700K





Driver
included

Life time and on/off
50.000 h
>25.000 on/off



	colour temp.	colour
LED-MASTER-960		
8031414862122		
lumen	129600 lm	
watt	960W	
beam angle	60° x 100°	
pf	0.90	

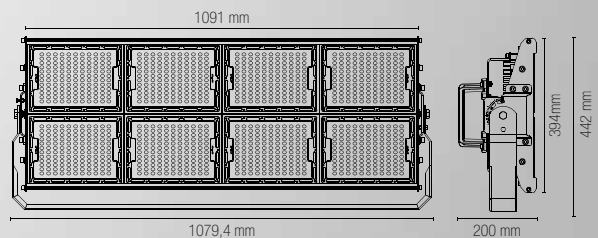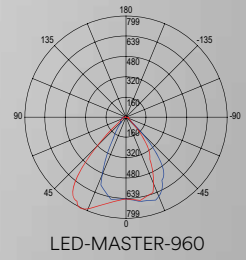

ENERGY

Faro LED integrato per pensiline struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.

Gas station built-in LED light in die-cast aluminium body and lens in anti-UV, self-extinguishing, shockproof material.



Materiale
alluminio

Colore
bianco



Temperatura colore
4000K



Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminium

Colour
white




Colour temperature
4000K



Driver
included

Life time and on/off
50.000 h
>25.000 on/off

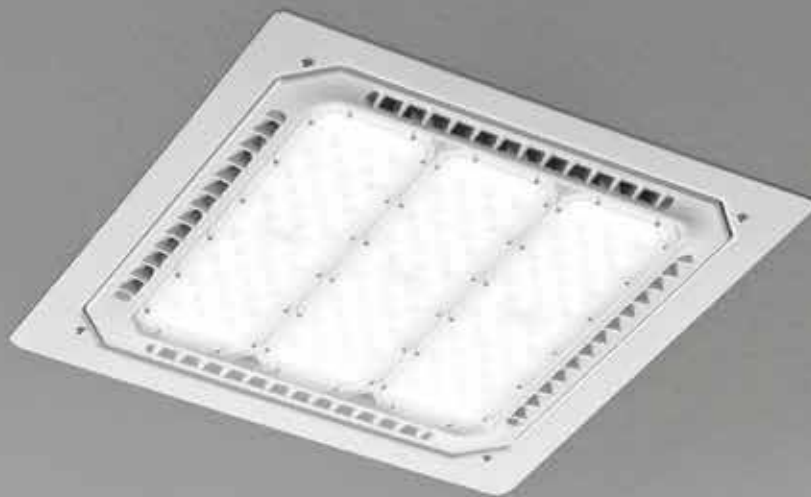



LED-ENERGY-80-INC

8031414862085

lumen


colour temp. | colour

● ●
11100 lm

watt 80W

beam angle 80°

pf 0.90

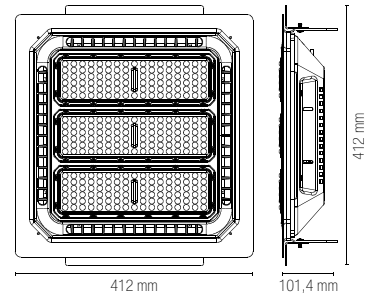

LED-ENERGY-80-PL

8031414862078

lumen


colour temp. | colour

● ●
11100 lm


watt 80W

beam angle 80°


pf 0.90

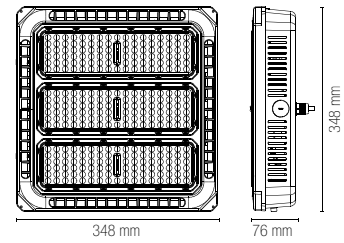

Fotometria del prodotto / Photometric curve




LED-ENERGY-80-INC



LED-ENERGY-80-PL

OUTDOOR

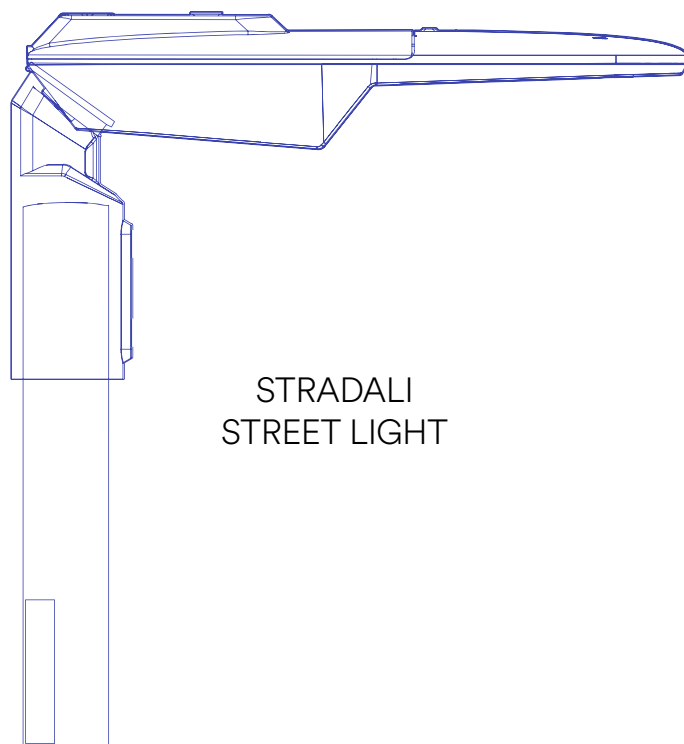

STRADALI
STREET LIGHT

AUREUS

Faro stradale LED in alluminio con pannello solare integrato.
Aluminum LED street light with integrated solar panel.



Materiale
alluminio

Colore
antracite



Temperatura colore
3000K / 4000K



Driver
incluso

Material
aluminum

Colour
anthracite



Colour temperature
3000K / 4000K



Driver
included



LED-AUREUS-20C-SOLAR

8031414921874

lumen

colour temp.	colour

1600 lm

LED-AUREUS-20M-SOLAR

8031414921881

lumen

colour temp.	colour


1600 lm

watt

20W


beam angle

80° x 80°



Accessori inclusi / Included accessories

Pannello solare /
Solar panel




3.2V 20Ah LiFePO4

Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable



Radiocomando /
Remote control

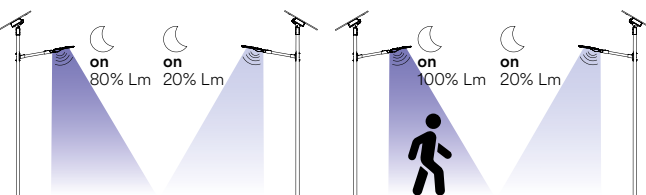

Interruttore per due funzioni / Switch for two functions

1. Sensore crepuscolare
ON 100% luce per 10 min
Dopo 2 ore graduale
riduzione fino al 10% luce /
Crepuscular sensor
ON 100% light for 10 min
After 2 hours gradual
reduction to 10% light

2. Sensore di movimento
ON 100% luce
Dopo 20 secondi 20% luce /
Motion sensor
ON 100% light
After 20 seconds 20% light

RADIUS

Faro stradale LED in alluminio silver con pannello solare.
Silver aluminum LED street light with solar panel.



Materiale
alluminio

Colore
silver



Temperatura colore
3000K / 4000K



Driver
incluso

Material
aluminum


Colour
silver



Colour temperature
3000K / 4000K



Driver
included

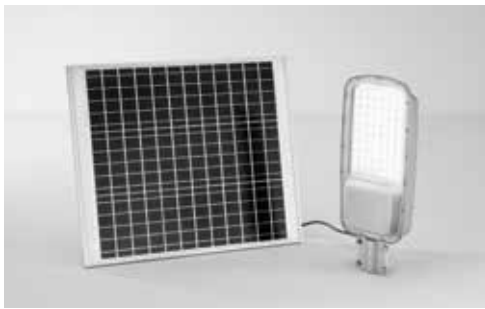

LED-RADIUS-15C-SOLAR

8031414917006

lumen

colour temp. colour



2100 lm

LED-RADIUS-15M-SOLAR



8031414917013

lumen



2100 lm

watt 48W
beam angle 80° x 140°
pf 0.90

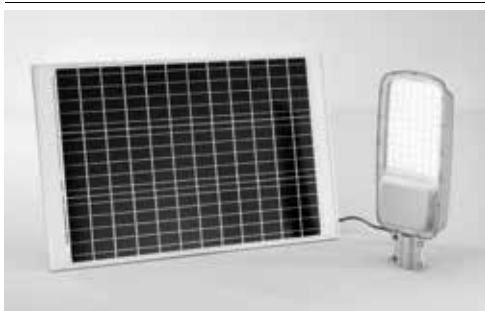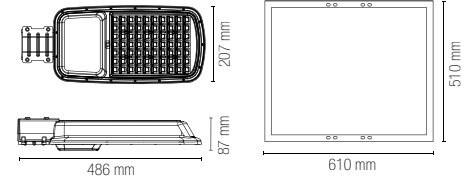

LED-RADIUS-30C-SOLAR

8031414917020

lumen

colour temp. colour



4200 lm

LED-RADIUS-30M-SOLAR


8031414917037

lumen




4200 lm

watt 64W
beam angle 80° x 140°
pf 0.90

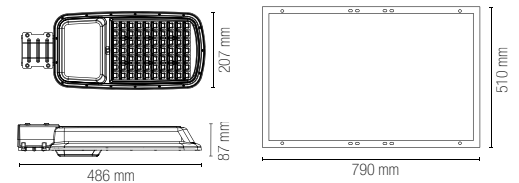

Accessori inclusi / Included accessories

Pannello solare / Solar panel



50W - lithium 12,8V 54000 mAh
75W - lithium 25,6V 36000 mAh

Batteria ricaricabile non sostituibile / Rechargeable battery non replaceable



imbocco palo 60 mm / 60 mm pole entry

Accessori non inclusi / Not included accessories



LED-RADIUS-REMOTE
8031414917048

Radiocomando / Remote control





LED-RADIUS-ST
8031414917044

Staffa per montaggio su palo / Pole mounting bracket




LED-RADIUS-ST-W
8031414917051


Staffa per montaggio su palo o a muro / Pole or wall mounting bracket

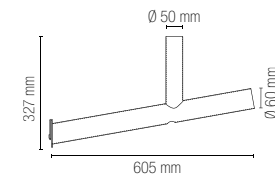


Fotometria del prodotto / Photometric curve



LED-RADIUS-15-SOLAR



LED-RADIUS-30-SOLAR

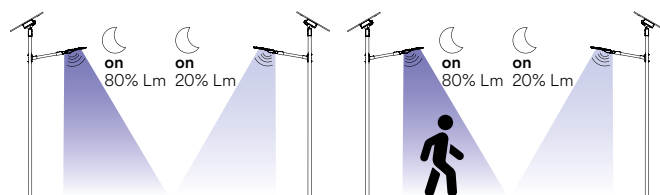

Sensore crepuscolare
ON 80% luce
Dopo 20 secondi 20% luce /
Crepuscular sensor
ON 80% light
After 20 seconds 20% light

Sensore di movimento
ON 80% luce
Dopo 20 secondi 20% luce /
Motion sensor
ON 80% light
After 20 seconds 20% light

FEBO

Faro stradale LED in alluminio con pannello solare.
Aluminum LED street light with solar panel.



Materiale
alluminio

Materiale pannello solare
celle in silicio
monocristallino

Colore
silver



Temperatura colore
4000K



Material
aluminum

Solar panel material
monocrystalline
silicon

Colour
silver



Colour temperature
4000K






Lenti in materiale autoestinguente,
antiurto, anti-UV /
Lens in anti-UV, self-extinguishing,
shockproof material

LED-FEBO-SOLAR
8031414879052
lumen

colour temp.	colour
6800 lm	

watt **40W**
beam angle **140° x 85°**

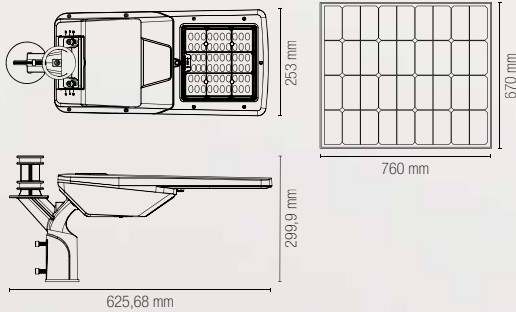

**Accessori inclusi /
Included accessories**

Pannello solare /
Solar panel




Lithium 12,8V 30AH

Batteria ricaricabile non sostituibile /
Rechargeable battery non replaceable



imbocco palo 60 mm /
60 mm pole entry

**Fotometria del prodotto /
Photometric curve**



LED-FEBO-SOLAR

		☀ on <20lux		🌙 on		☀ off +12h		Impostazioni di fabbrica / Default Settings	
flux		T1	T2	T3	T4	hours	flux		
100%		█	█			T1 <20lux ÷ +2h	100%		
60%		█	█			T2 T1 ÷ +2h	60%		
50%		█	█			T3 T2 ÷ +7h	10%		
10%		█	█			T4 T3 ÷ +2h	50%		
						+12h off			

IPERION

Faro stradale LED in alluminio silver con pannello solare.
Silver aluminum LED street light with solar panel.



Materiale
alluminio

Materiale pannello solare

celle in silicio
monocristallino

Colore
silver



Temperatura colore
4000K



Material
aluminum

Solar panel material

monocrystalline
silicon




Colour
silver




Colour temperature
4000K



	colour temp.
LED-IPERION-50-SOLAR 8031414879069	9000 lm
LED-IPERION-75-SOLAR 8031414879076	13500 lm
watt	50W
beam angle	156° x 71°

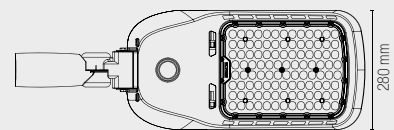

LED-IPERION-50-SOLAR



LED-IPERION-75-SOLAR



Lenti in materiale autoestinguente, antiurto, anti-UV / Lens in anti-UV, self-extinguishing, shockproof material

Sensore microwave
max altezza 6m
raggio 7m /
Microwave sensor
max height 6m
radius 7m

Accessorio non incluso /
Not included accessory

LED-IPERION-REMOTE
8031414879083


Radiocomando multifunzione /
Remote control multi-mode control

*regolabile solo con radiocomando
multifunzione LED-IPERION-REMOTE /
* adjustable only with LED-IPERION-REMOTE
remote control




Accessori inclusi /
Included accessories

Palo 60 cm /
Pole 60 cm



Pannello solare /
Solar panel




50W - lithium 12,8V 54000 mAh
75W - lithium 25,6V 36000 mAh

Batteria ricaricabile
non sostituibile /
Rechargeable battery
non replaceable




imbocco palo 60 mm /
60 mm pole entry


Fotometria del prodotto /
Photometric curve



LED-IPERION-50-SOLAR



LED-IPERION-75-SOLAR

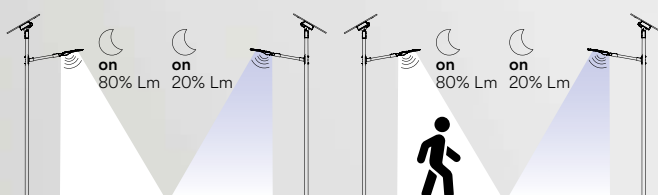

Sensore crepuscolare
ON 80% luce
Dopo 20 secondi 20% luce /
Crepuscular sensor
ON 80% light
After 20 seconds 20% light

Sensore di movimento
ON 80% luce
Dopo 20 secondi 20% luce /
Motion sensor
ON 80% light
After 20 seconds 20% light

STREETWAY

Faro stradale LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguento, antiurto, anti-UV.

Built-in LED street light die-cast aluminum body and lens in anti-UV, self-extinguishing shockproof material.



Materiale

alluminio

Colore

silver



Temperatura colore

4000K



Driver

incluso

Durata e on/off

50.000 h
>25.000 on/off

Material

aluminum

Colour

silver



Colour temperature

4000K



Driver

included

Life time and on/off

50.000 h
>25.000 on/off






LED-STREETWAY-50

8031414876334

lumen

colour temp.	colour
7800 lm	

watt	50W
beam angle	80° x 140°
pf	0.90



LED-STREETWAY-100

8031414876341

lumen

colour temp.	colour
15500 lm	


LED-STREETWAY-100FC

8031414879113

lumen

colour temp.	colour
15500 lm	
crepuscular sensor	on 6 lux off 50 lux

watt	100W
beam angle	80° x 140°
pf	0.90




LED-STREETWAY-150

8031414876358

lumen

colour temp.	colour
22000 lm	

watt	150W
beam angle	80° x 140°
pf	0.90




LED-STREETWAY-200

8031414879106


lumen

colour temp.	colour
29900 lm	


watt	200W
beam angle	80° x 140°
pf	0.90




Fotometria del prodotto / Photometric curve




LED-STREETWAY-50W




LED-STREETWAY-100W



LED-STREETWAY-150W



LED-STREETWAY-200W

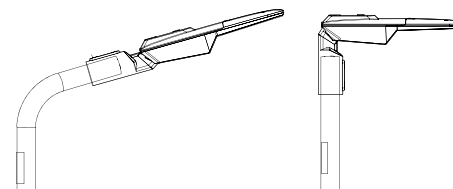

Doppio sistema di montaggio. Per palo Ø 60 mm / Double mounting system. Fit for Ø 60 mm pole

HIGHWAY

Faro stradale LED integrato struttura in alluminio pressofuso e diffusore con lenti in materiale autoestinguente, antiurto, anti-UV.

Built-in LED street light die-cast aluminum body and lens in anti-UV, self-extinguishing shockproof material.



Materiale

alluminio

Colore

antracite



Temperatura colore

4000K



Driver

incluso

Durata e on/off

30.000 h
>15.000 on/off

Material

aluminum

Colour

anthracite



Colour temperature

4000K



Driver

included

Life time and on/off

30.000 h
>15.000 on/off






LED-HIGHWAY-50

8031414877034

lumen

colour temp.	colour
7500 lm	

watt	50W
beam angle	135° x 80°
pf	0.90




LED-HIGHWAY-100

8031414877041

lumen

colour temp.	colour
14000 lm	

watt	100W
beam angle	135° x 80°
pf	0.90




LED-HIGHWAY-150

8031414877058

lumen

colour temp.	colour
20000 lm	

watt	150W
beam angle	135° x 80°
pf	0.90




LED-HIGHWAY-ADAT


8031414877904

Adattatore 90° armature stradali highway imbocco palo 60 mm / 90° adapter 60 mm pole entry for street light


imbocco palo 60 mm / 60 mm pole entry




Fotometria del prodotto / Photometric curve



LED-HIGHWAY-50



LED-HIGHWAY-100



LED-HIGHWAY-150

POLIS

Faro stradale LED con fissaggio su palo verticale orizzontale più versione a sospensione, in alluminio pressofuso con diffusore in vetro temperato.

Built-in LED street light die-cast aluminum body with tempered glass diffuser structure with mount bracket on vertical or horizontal pole and version with suspension mount bracket.



Materiale

alluminio pressofuso

Colore

silver



Temperatura colore

4000K



Driver

incluso

Durata e on/off

50.000 h
>25.000 on/off

Material

die-cust aluminum

Colour

silver



Colour temperature

4000K



Driver

included

Life time and on/off

50.000 h
>25.000 on/off



LED-POLIS-50

8031414879465




lumen

colour temp. | colour



7000 lm

watt	50W
beam angle	155° x 75°
pf	0.90



imbocco palo 60mm
60mm pole entry



LED-POLIS-S50

8031414879472


lumen

colour temp. | colour




7000 lm


watt	50W
beam angle	155° x 75°
pf	0.90



Fotometria del prodotto / Photometric curve




LED-POLIS-50



LED-POLIS-S50

INDUSTRIAL

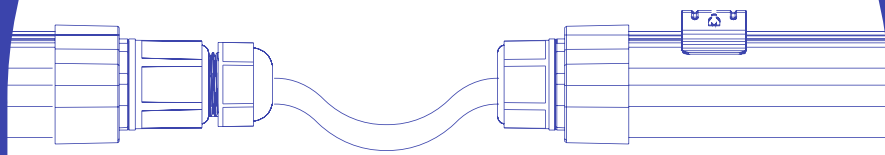

HIGH BAY & TRI-PROOF

AVATAR

Lampada LED high bay in alluminio nero.
Black aluminium high bay LED lamp.



Materiale
alluminio

Colore
nero



Temperatura colore
4000K



Driver
incluso

Durata e on/off
50.000 h
>25.000 on/off

Material
aluminum

Colour
black



Colour temperature
4000K




Driver
included

Life time and on/off
50.000 h
>25.000 on/off




Fotometria del prodotto / Photometric curve



LED-AVATAR-100




LED-AVATAR-150



LED-AVATAR-200



LED-AVATAR-100 8031414903733	colour temp.
lumen	15000 lm
watt	100W
beam angle	90°
pf	0.90



colour temp.




Accessorio non incluso /
Not included accessory



Connettore IP67 incluso /
IP67 connector included



LED-AVATAR-150 8031414903740	colour temp.
lumen	22500 lm
watt	150W
beam angle	90°
pf	0.90



colour temp.



LED-AVATAR-ST1015
8031414903771


Staffa per fissaggio a parete/soffitto
AVATAR 100 e 150 /
Bracket for wall/ceiling fixing
AVATAR 100 and 150



Connettore IP67 incluso /
IP67 connector included




LED-AVATAR-200 8031414903757	colour temp.
lumen	30000 lm
watt	200W
beam angle	90°
pf	0.90



colour temp.



Accessorio non incluso /
Not included accessory



Connettore IP67 incluso /
IP67 connector included

LED-AVATAR-ST200
8031414903795

Staffa per fissaggio a parete/soffitto
AVATAR 200 /
Bracket for wall/ceiling fixing
AVATAR 200




LED-AVATAR-DR-HELP 8031414903764	emergency light	15W
Driver d'emergenza con staffa inclusa / Emergency driver with bracket included		

Li-FePO4 3000mAh-11.1V
Batteria per emergenza inclusa /
Included emergency battery



Funzione **MAINTAIN** sempre accesa /
MAINTAIN function always on




Funzione **NON-MAINTAIN** emergenza /
NON-MAINTAIN function only emergency



ATLANTIC

Plafoniera stagna per tubi a LED bilampada in PC+PC.
Waterproof lamp for double LED tube in PC+PC.







LED-ATLANTIC-ST-60

8031440355315

2 x T8 230V




Lampadina non inclusa / Light bulb not included



LED-ATLANTIC-ST-120

8031440355322


2 x T8 230V



LED-ATLANTIC-ST-150

8031440355292

2 x T8 230V



HIGH BAY & TRI-PROOF

In.tec light

NAUTILUS

Plafoniere stagno in policarbonato.
Waterproof ceiling lamps in polycarbonate.



Materiale
policarbonato

Colore
silver



Temperatura colore
4000K



Driver
integrato

Durata e on/off
50.000 h
>25.000 on/off

Material
polycarbonate

Colour
silver



Colour temperature
4000K



Driver
built-in

Life time and on/off
50.000 h
>25.000 on/off




Fotometria del prodotto / Photometric curve




LED-NAUTILUS-60



LED-NAUTILUS-120



LED-NAUTILUS-150

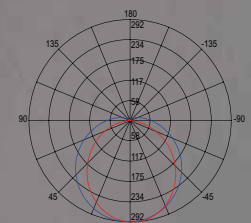

LED-NAUTILUS-PRO



LED-NAUTILUS-60


8031414876501

lumen colour temp. | colour
2900 lm

watt 21W

beam angle 120°

pf -



LED-NAUTILUS-120

8031414876518

lumen colour temp. | colour
5400 lm

watt 40W

beam angle 120°

pf 0.90



LED-NAUTILUS-150


8031414876525

lumen colour temp. | colour
7500 lm

watt 55W

beam angle 120°

pf 0.90



LED-NAUTILUS-PRO


8031414876532

lumen colour temp. | colour
10600 lm

watt 80W

beam angle 120°

pf 0.90



LED-NAUTILUS-120HP

8031414919512


lumen colour temp. | colour
5400 lm

emergency light 3 h - 4W - 560 lm


watt 40W

beam angle 120°

pf 0.90



16 hours **LiFePo4 1500mAh, 3000mAh**
Batteria per emergenza inclusa / Included emergency battery

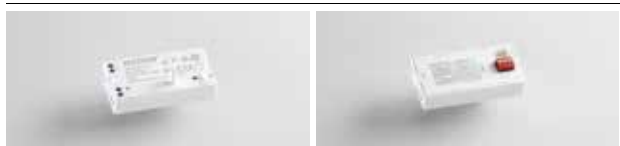

NAUTILUS-SENS
8031414878758



In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.

ARTIC

Plafoniera stagna LED integrato in policarbonato.
Built-in LED TRI PROOF ceiling lamps in PC.



Materiale

policarbonato

Colore

bianco



Temperatura colore

4000K



Driver

integrato

Durata e on/off

50.000 h
>25.000 on/off

Material

polycarbonate

Colour

white



Colour temperature

4000K



Driver

built-in

Life time and on/off

50.000 h
>25.000 on/off







LED-ARTIC-30

8031414882625

lumen 1200 lm

watt 9W
beam angle 120°
pf -

colour temp. colour




LED-ARTIC-60

8031414882632

lumen 1800 lm

watt 15W
beam angle 120°
pf -

colour temp. colour






LED-ARTIC-120

8031414882601

lumen 4000 lm

watt 30W
beam angle 120°
pf 0.90

colour temp. colour

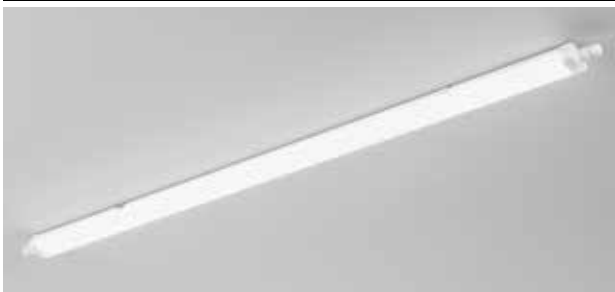



LED-ARTIC-150

8031414882618


lumen 5500 lm

watt 45W
beam angle 120°
pf 0.90

colour temp. colour



Fotometria del prodotto / Photometric curve

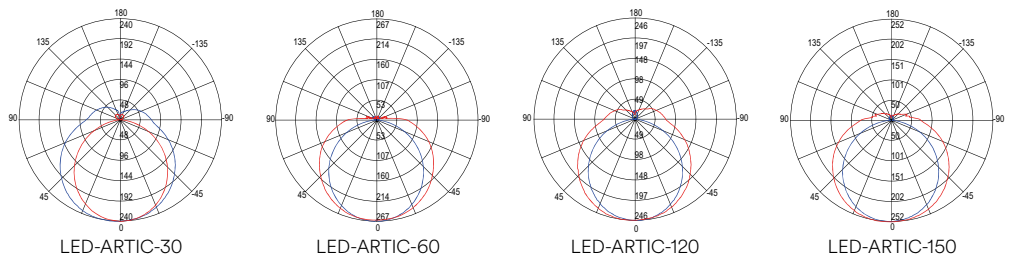

OCEAN

Plafoniera stagna LED integrato in policarbonato.
Built-in LED TRI PROOF ceiling lamps in PC.



Materiale

policarbonato

Colore

bianco



Temperatura colore

4000K



Driver

integrato

Durata e on/off

30.000 h
>15.000 on/off

Material

polycarbonate

Colour

white



Colour temperature

4000K



Driver

built-in

Life time and on/off

30.000 h
>15.000 on/off




LED-OCEAN-SENS

8031414868858


lumen

colour temp.	colour
3240 lm	

watt	36W
beam angle	120°
pf	0.90



Accessori inclusi / Included accessories	crepuscolar sensor	motion sensor
Sensore microonde di movimento / Microwave motion sensor	<p>20% Lm</p>	<p>3-8m 100° 60" on 100% Lm on 20% Lm</p>




technical information **ARTIC**



HIGH BAY & TRI-PROOF


In.tec light

DECORATIVE

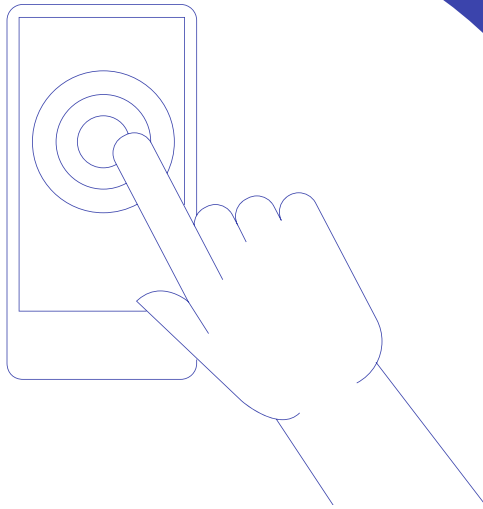

EASY DOMOTIC 24V

EASY DOMOTICA 24V



Con questo segmento tecnico intendiamo soddisfare al meglio la crescente esigenza di migliorare la qualità di vita domestica, e lavorativa attraverso l'utilizzo di dispositivi di illuminazione sempre più interconnessi fra loro tramite collegamenti sempre più semplificati dalle tecnologie wireless.

I dispositivi di illuminazione diventano uno strumento estremamente personalizzato e modulabile che si fondono, anche in diversi momenti della giornata, con le evolute esigenze di illuminazione non più fine a se stessa ma adattata ai diversi umori sia di una utenza professionale che di una utenza domestica o ludica. Questa sezione raggruppa diverse tipologie di prodotti 24V (ad esempio indoor e outdoor) che, grazie all'utilizzo di accessori easy connector, possono essere connessi tra di loro per il controllo simultaneo. Il controllo dei dispositivi diventa easy: la connessione ad alimentatori a tensione costante in parallelo è compatibile con centraline di controllo in Radio Frequenza 2.4G, Infrarossi, Wifi o Bluetooth e le centraline, a loro volta, prevedono interfacce wifi, bluetooth oppure possono essere controllate tramite wall pad o radiocomandi.

With this technical segment, we intend meet in the best way the growing need to improve the quality of home and working life through the use of lighting devices that are increasingly interconnected with each other through connections that are increasingly simplified by wireless technologies.

The lighting devices become an extremely personalized and modular tool that merge, even at different times of the day, with the evolved lighting needs no longer as light source itself but light adapted to the different moods of both professional users, domestic users, playful users. This section groups 24V products (for example indoor or outdoor) that, thanks to easy connector accessories, can be connected each other for simultaneous control. Devices control becomes easy: constant voltage power supply in parallel connection system are compatible with 2.4G Radio Frequency, Infrared, Wifi or Bluetooth control units and the control units can be controlled by wifi, bluetooth devices or via a wall pad or remote control.



CAVO-4CH-CONN-MF 
8031414878772
100 cm
Cavo di connessione
connettore M+F /
100 cm
Connection cable
M+F connector



CAVO-4CH-CONN-T 
8031414878789
40+20 cm
Cavo di connessione
a T connettore M+F+F /
40+20 cm
T connection cable M+F+F
connector




CAVO-4CH-CONN-M 
8031414878796
50 cm
Cavo di connessione
connettore M+cavi sciolti /
50 cm
Connection cable
M+cables



XANTO-RF

Incasso in alluminio pressofuso antiriflesso con cavo easy connection integrato.
Diecast aluminum anti-glare down-light with built-in easy domotic cable.

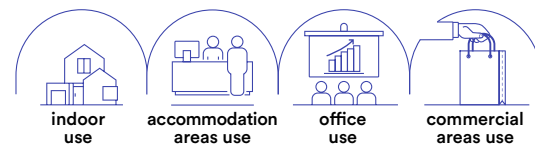

Materiale
alluminio pressofuso

Colore
bianco

Temperatura colore
RGB + 4000K



Driver

DC 24V non incluso
Tensione costante
connessione
in parallelo

Durata e on/off

25.000h
>15.000 on/off

Material

die cast aluminum

Colour
white

Colour temperature
RGB + 4000K




Driver

DC 24V not included
Constant voltage
parallel connecting
system

Life time and on/off

25.000 h
>15.000 on/off




Driver p. 843-852
Controller p. 854-857



INC-XANTO-R120-24V

8031414877942


lumen



1120 lm

watt 12W
beam angle 120°
pf -


Ø 110 mm



INC-XANTO-R220-24V

8031414878697


lumen




3000 lm

watt 30W
beam angle 120°
pf 0.90


Ø 200 mm



**Fotometria del prodotto /
Photometric curve**



INC-XANTO-R120-24V




INC-XANTO-R220-24V

PANEL

Pannello LED con struttura in alluminio diffusore in acrilico con cavo easy connection integrato.

LED panel with aluminum structure and acrylic diffuser with built-in easy domotic cable.

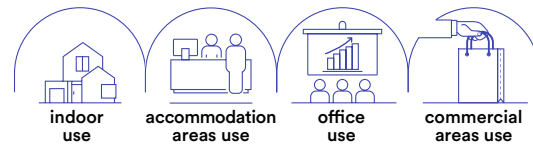

Materiale
alluminio
diffusore in acrilico

Colore
bianco



Temperatura colore
RGB + 4000K



Driver
DC24V
tensione costante
non incluso

Durata e on/off
20.000h
>10.000 on/off

Material
aluminum
acrylic diffuser

Colour
white




Colour temperature
RGB + 4000K



Driver
DC24V
constant voltage
not included

Life time and on/off
20.000h
>10.000 on/off



Driver p. 843-852
Controller p. 854-857



Fotometria del prodotto /
Photometric curve

LED-PANEL-60X60-24V

8031414875313

lumen

colour
temp.
3280 lm




watt 30W


beam angle 120°

pf 0.90

590 × 590 mm




LED-PANEL-60×60-24V



EASY DOMOTIC 24V

In.tec light

STRIP

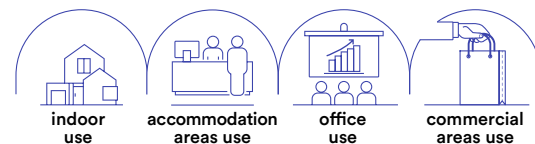

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton
senza silicone

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Material
kapton
without silicone


Colour temperature
RGB + 4000K

Driver
DC24V
constant voltage
not included

Life time and on/off
50.000h
>25.000 on/off

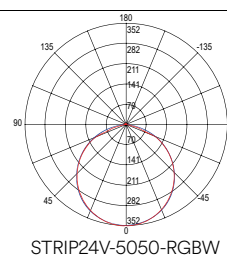

STRIP24V-5050-RGBW

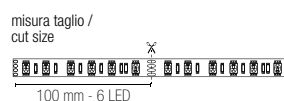

STRIP24V-5050-RGBW
8031414871384
lumen

colour temp.
5400 lm/m

light source	SMD 5050
watt/m	19,2W
led/m	60

Rotolo 5 metri strip led.
Roll 5 meters strip-led.



Driver p. 843-852
Controller p. 854-857



Materiale
kapton con
rivestimento
in silicone

Temperatura colore
RGB + 4000K

Driver
DC24V
tensione costante
non incluso


Durata e on/off
50.000h
>25.000 on/off

Material
kapton
with silicone
cover



Colour temperature
RGB + 4000K

Driver
DC24V
constant voltage
not included

Life time and on/off
50.000h
>25.000 on/off

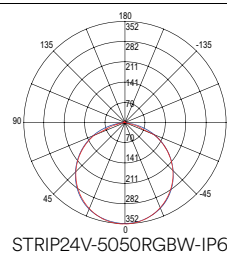

STRIP24V-5050RGBW-IP68

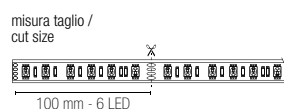

STRIP24V-5050RGBW-IP68
8031414871407
lumen

colour temp.
5400 lm/m

light source	SMD 5050
watt/m	19,2W
led/m	60

TARGET

Faro proiettore in alluminio con picchetto incluso, cavo easy connection integrato.

Aluminum flood light with spike included, built-in easy domotic cable.



Materiale
alluminio

Colore
nero



Temperatura colore
RGB + 4000K



Driver
DC24V

tensione costante
non incluso

Durata e on/off
30.000h
>15.000 on/off

Material
aluminum

Colour
black



Colour temperature
RGB + 4000K




Driver
DC24V

constant voltage
not included

Life time and on/off
30.000h
>15.000 on/off




Driver p. 843-852
Controller p. 854-857



LED-TARGET-8-24V
8031414878604
lumen

colour temp.
 190 lm


watt 8W
beam angle 30°




LED-TARGET-30-24V
8031414878550
lumen

colour temp.
 468 lm


watt 30W
beam angle 30°



Fotometria del prodotto / Photometric curve



LED-TARGET-8-24V



LED-TARGET-30-24V

EASY DOMOTIC 24V

In.tec light

AGILITY





Materiale
alluminio
diffusore in vetro

Colore
nero



Temperatura colore
RGB + 4000K



Driver
DC24V
tensione costante
non incluso

Durata e on/off
20.000h
>10.000 on/off

Material
aluminum
glass diffuser

Colour
black



Colour temperature
RGB + 4000K



Driver
DC24V
constant voltage
not included

Life time and on/off
20.000h
>10.000 on/off

Proiettore a led integrato in alluminio nero e diffusore trasparente.
Built-in LED aluminium flood lamp black finish with trasparent diffuser.

Driver p. 843-852
Controller p. 854-857




LED-AGILITY-36-24V
8031414915828
lumen

colour temp.

735 lm

watt 36W
beam angle 120°




LED-AGILITY-72-24V
8031414915835
lumen


colour temp.

1540 lm


watt 72W
beam angle 120°

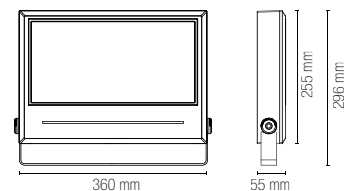

Fotometria del prodotto / Photometric curve



LED-AGILITY-36-24V



LED-AGILITY-72-24V

QUICK





Materiale
alluminio
diffusore in vetro

Colore
nero



Temperatura colore
RGB



Driver
DC24V
tensione costante
non incluso

Durata e on/off
20.000h
>10.000 on/off

Material
aluminum
glass diffuser

Colour
black



Colour temperature
RGB



Driver
DC24V
constant voltage
not included

Life time and on/off
20.000h
>10.000 on/off

Proiettore a led integrato in alluminio silver e diffusore trasparente.

Built-in LED aluminium flood lamp silver finish with trasparent diffuser.




Driver p. 843-852
Controller p. 854-857




LED-QUICK-36-24V

8031414915842
lumen




735 lm

watt	36W
beam angle	120°

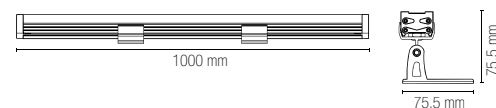

LED-QUICK-72-24V


8031414915859
lumen



1800 lm

watt	72W
beam angle	120°

Fotometria del prodotto / Photometric curve

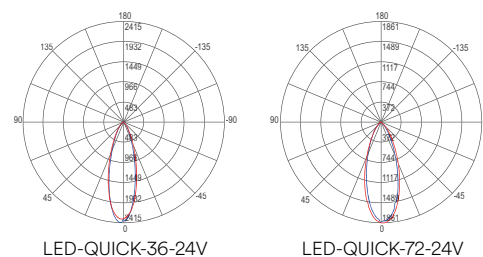

SPRINT

Segnapassi incasso a pavimento o parete
con cavo easy connection integrato.

Inground and wall recessed light
with built-in easy domotic cable.



Materiale
alluminio

Colore
acciaio



Temperatura colore
RGB + 4000K



Driver

DC 24V
tensione costante
non incluso

Durata e on/off

25.000h
>10.000 on/off

Material

aluminum

Colour

stainless steel



Colour temperature
RGB + 4000K



Driver

DC 24V
costant voltage
not included

Life time and on/off

25.000h
>10.000 on/off



LED-SPRINT-R5-24V

8031414878543

lumen

colour
temp.



60 lm

watt 1,5W

beam angle 108°

pressure loads max 100 kg

Ø 42 mm




Ø 50 mm



Driver p. 843-852
Controller p. 854-857

Fotometria del prodotto /
Photometric curve



LED-SPRINT-R5-24V



RUNNER

Segnapassi incasso a pavimento o parete
con cavo easy connection integrato.

Inground and wall recessed light
with built-in easy domotic cable.



Materiale
alluminio

Colore
nikel spazzolato



Temperatura colore
RGB + 4000K



Driver

DC 24V
tensione costante
non incluso

Durata e on/off
30.000h
>15.000 on/off

Material
aluminum

Colour
brushed nickel



Colour temperature
RGB + 4000K



Driver

DC 24V
costant voltage
not included

Life time and on/off
30.000h
>15.000 on/off



Driver p. 843-852
Controller p. 854-857




EASY DOMOTIC 24V


In.tec light




LED-RUNNER-Q8-24V
8031414878536
lumen



LED-RUNNER-R8-24V
8031414878567
lumen




Fotometria del prodotto /
Photometric curve



LED-RUNNER-Q8-24V
LED-RUNNER-R8-24V

Accessori inclusi /
Included accessories


x1
Cassetta di
derivazione /
Recessed box




watt	10W
beam angle	30°
pressure loads	max 100 kg
	Ø 63 mm



watt	10W
beam angle	30°
pressure loads	max 100 kg
	Ø 63 mm



DECORATIVE

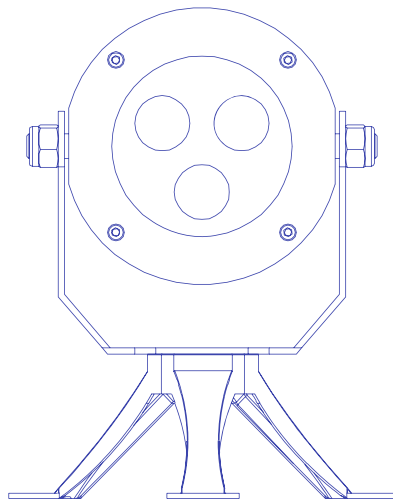

LUCI DECORATIVE TECNICHE DMX
DMX TECHNICAL DECORATION LIGHTING

SHOW WALLWASHER



outdoor
use



accommodation
areas use



office
use



commercial
areas use





technical information

SHOW WALLWASHER



Materiale
alluminio

Temperatura colore
RGBW + UV



Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour temperature
RGBW + UV



Driver
built-in


Life time and on/off
50.000h
>25.000 on/off

Proiettore LED RGB full color in alluminio e wallwasher a batteria ricaricabile con 9 LED RGBW+UV e ricevitore DMX 512 integrato, per emettere una vasta gamma di colori mixando sei colori principali: rosso, verde, blu, bianco, ambr e ultravioletto.

Full color RGB LED projector made of aluminum and rechargeable battery-powered wallwasher with 9 RGBW+UV LEDs and built-in DMX 512 receiver to emit a wide range of colors by mixing six main colors: red, green, blue, white, amber and ultraviolet.



	colour temp.	colour
LED-SHOW-WW9 8031414915446		
lumen	RGBW+UV	
watt	9 x 18W	
beam angle	45°	

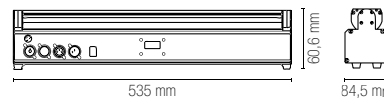

Tempo di ricarica /
Charging time

Durata accensione /
Ignition duration

Modalità auto /
Auto mode

Modalità canali /
Channel mode

Modalità automatiche
tramite tasto /
Automatic modes
via push-button

Control mode

**Ricarica completa in 5 ore /
Full recharge in 5 hours**

**RGBW+UV con la luminosità al massimo 3 ore /
RGBW+UV with maximum brightness 3 hours**

**7 ore monocromatico più di 20 ore /
7 hours monochrome more than 20 hours**

**6/11 DMX channel - 16.7 milioni di combinazioni colori /
6/11 DMX channels - 16.7 million color combinations**

**Cambio colore colore stroboscopico, dimmerazione colore
cambio colore graduale, cambio colori a step /
Color change, strobe color, color dimming,
gradual color change, step color change**

**DMX512, master/slave, auto, sound active/ Wireless DMX,
WiFi mobile phone APP control**

Accessori inclusi / Included accessories



Accessori Wi-Fi /
Wi-Fi accessories



13200 mAh
Batteria ricaricabile, non sostituibile /
Rechargeable battery, non replaceable

Control system easy installation



**Smart
WIFI**



**ALEXA e
GOOGLE HOME
voice control**

SHOW PAR





Materiale
alluminio

Temperatura colore
RGBW + UV



Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour temperature
RGBW + UV



Driver
built-in


Life time and on/off
50.000h
>25.000 on/off

Faro LED a batteria ricaricabile con 9 LED RGBW+UV e ricevitore DMX 512 integrato, emette una vasta gamma di colori mixando i sei principali: rosso, verde, blu, bianco, ambr e ultravioletto, permettendo di creare ogni colore desiderato.

Rechargeable battery-powered LED spotlight with 9 RGBW+UV LEDs and built-in DMX 512 receiver, emits a wide range of colors by mixing the six main ones: red, green, blue, white, amber and ultraviolet, allowing you to create any color you want.



	colour temp.	colour
LED-SHOW-PAR9 8031414915439		
lumen	RGBW+UV	
watt	9 x 18W	
beam angle	45°	

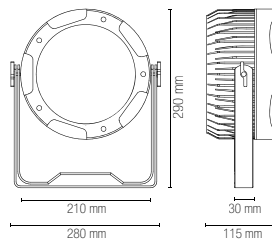

Tempo di ricarica /
Charging time

Durata accensione /
Ignition duration

Modalità auto /
Auto mode

Modalità canali /
Channel mode

Modalità automatiche
tramite tasto /
Automatic modes
via push-button

Control mode

**Ricarica completa in 5 ore /
Full recharge in 5 hours**

**RGBW+UV con la luminosità al massimo 3 ore /
RGBW+UV with maximum brightness 3 hours**

**7 ore monocromatico più di 20 ore /
7 hours monochrome more than 20 hours**

**6/11 DMX channel - 16.7 milioni di combinazioni colori /
6/11 DMX channels - 16.7 million color combinations**

**Cambio colore colore stroboscopico, dimmerazione colore
cambio colore graduale, cambio colori a step /
Color change, strobe color, color dimming,
gradual color change, step color change**

**DMX512, master/slave, auto, sound active/ Wireless DMX,
WiFi mobile phone APP control**

Accessori inclusi / Included accessories



Accessori Wi-Fi /
Wi-Fi accessories



13200 mAh
Batteria ricaricabile, non sostituibile /
Rechargeable battery, non replaceable

Control system easy installation



**Smart
WIFI**



**ALEXA e
GOOGLE HOME
voice control**

SHOW Q





Materiale
alluminio

Temperatura colore
RGBW + UV



Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour temperature
RGBW + UV



Driver
built-in


Life time and on/off
50.000h
>25.000 on/off

Faro LED a batteria ricaricabile con 6 LED RGBW+UV e ricevitore DMX 512 integrato, emette una vasta gamma di colori mescolando i sei principali: rosso, verde, blu, bianco, ambrano e ultravioletto, consentendo la creazione di ogni colore desiderato.

Rechargeable battery-operated LED spotlight with 6 RGBW+UV LEDs and built-in DMX 512 receiver, emits a wide range of colors by mixing the six main ones: red, green, blue, white, amber and ultraviolet, allowing the creation of any desired color.



LED-SHOW-Q6 8031414915408	colour temp.	colour
lumen		
watt	6 x 18W	
beam angle	45°	



Tempo di ricarica /
Charging time

Durata accensione /
Ignition duration

Modalità auto /
Auto mode

Modalità canali /
Channel mode

Modalità automatiche
tramite tasto /
Automatic modes
via push-button

Control mode

**Ricarica completa in 5 ore /
Full recharge in 5 hours**

**RGBW+UV con la luminosità al massimo 3 ore /
RGBW+UV with maximum brightness 3 hours**

**7 ore monocromatico più di 20 ore /
7 hours monochrome more than 20 hours**

**6/11 DMX channel - 16.7 milioni di combinazioni colori /
6/11 DMX channels - 16.7 million color combinations**

**Cambio colore colore stroboscopico, dimmerazione colore
cambio colore graduale, cambio colori a step /
Color change, strobe color, color dimming,
gradual color change, step color change**

**DMX512, master/slave, auto, sound active/ Wireless DMX,
WiFi mobile phone APP control**

Accessorio non incluso / Not included accessory



LED-SHOW-CASE
8031414915415

Valigia per 10 pezzi /
Case for 10 pcs

Accessori inclusi / Included accessories



Accessori Wi-Fi /
Wi-Fi accessories



9600 mAh
Batteria ricaricabile, non sostituibile /
Rechargeable battery, non replaceable

Control system easy installation



**Smart
WIFI**





**ALEXA e
GOOGLE HOME
voice control**

SHOW TUBE

Faro LED a batteria ricaricabile con 9 LED RGBW+UV e ricevitore DMX 512 integrato, emette una vasta gamma di colori mescolando i sei principali: rosso, verde, blu, bianco, ambra e ultravioletto, permettendo la creazione di qualsiasi colore desiderato, dalle tonalità calde a quelle fredde.

Rechargeable battery-powered LED spotlight with 9 RGBW+UV LEDs and built-in DMX 512 receiver, emits a wide range of colors by mixing the six main ones: red, green, blue, white, amber and ultraviolet, allowing the creation of any desired color from warm to cool tones.

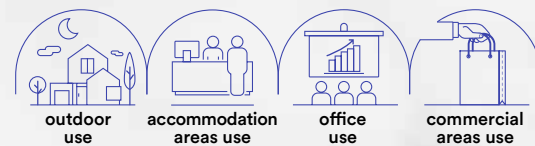



Materiale
alluminio

Temperatura colore
RGBW + UV



Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour temperature
RGBW + UV




Driver
built-in

Life time and on/off
50.000h
>25.000 on/off



LED-SHOW-TUBE
8031414915422
lumen



watt 8 x 28W
beam angle 360°

Tempo di ricarica /
Charging time

Durata accensione /
Ignition duration

Modalità auto /
Auto mode

Modalità canali /
Channel mode

Modalità automatiche
tramite tasto /
Automatic modes
via push-button

Control mode

**Ricarica completa in 5 ore /
Full recharge in 5 hours**

**RGBW+UV con la luminosità al massimo 3 ore /
RGBW+UV with maximum brightness 3 hours**

**7 ore monocromatico più di 20 ore /
7 hours monochrome more than 20 hours**

**6/11 DMX channel - 16.7 milioni di combinazioni colori /
6/11 DMX channels - 16.7 million color combinations**

**Cambio colore colore stroboscopico, dimmerazione colore
cambio colore graduale, cambio colori a step /
Color change, strobe color, color dimming,
gradual color change, step color change**

**DMX512, master/slave, auto, sound active/ Wireless DMX,
WiFi mobile phone APP control**



Accessori inclusi / Included accessories



Accessori Wi-Fi /
Wi-Fi accessories



10000 mAh
Batteria ricaricabile, non sostituibile /
Rechargeable battery, non replaceable

Control system easy installation



**Smart
WIFI**



**ALEXA e
GOOGLE HOME
voice control**

RAYS



outdoor
use



accommodation
areas use



office
use



commercial
areas use





Proiettore LED RGB FULL COLOR in alluminio.
LED RGB FULL COLOR lamp in aluminium.

Materiale
alluminio

Temperatura colore
RGB full color



Driver
incluso

Durata e on/off
50.000h
>25.000 on/off


Material
aluminum

Colour temperature
RGB full color



Driver
included

Life time and on/off
50.000h
>25.000 on/off

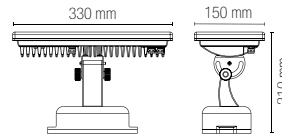




LED-RAYS-36P
8031440355445

lumen

watt
beam angle

colour temp. | colour
RGB

30 x 1W
45°

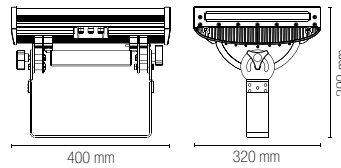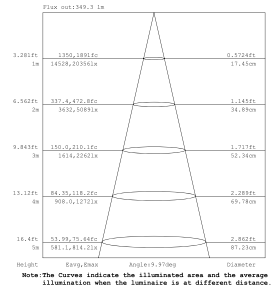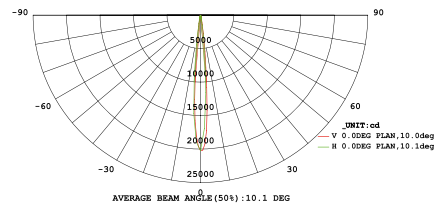



LED-RAYS-72P
8031440358040

lumen

watt
beam angle


colour temp. | colour
RGB

72 x 2W
45°

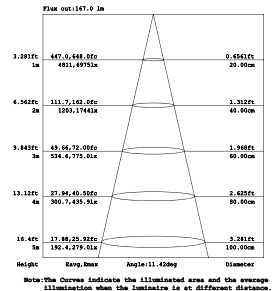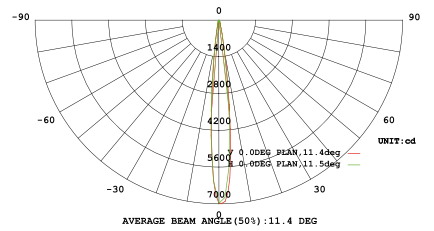

WALLWASHER

Proiettore LED RGB FULL COLOR in alluminio.
LED RGB FULL COLOR lamp in aluminium.

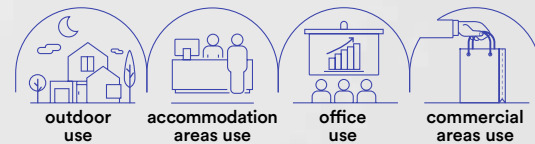

Materiale
alluminio

Temperatura colore
RGB full color



Driver
integrato

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum



Colour temperature
RGB full color



Driver
built-in


Life time and on/off
50.000h
>25.000 on/off




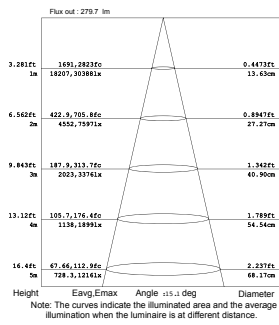
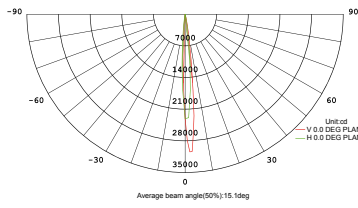


LED-WALLWASHER-18
8031440359559

lumen




watt 18 × 2W
beam angle 45°

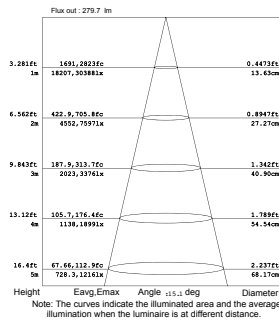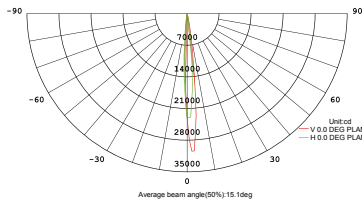


LED-WALLWASHER-36
8031440359528


lumen



watt 36 × 2W
beam angle 45°



IRIDE

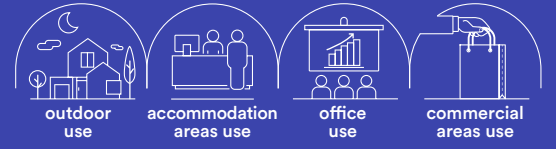



**Proiettore LED monocolor
o RGB FULL COLOR in alluminio.**
LED single colour or RGB FULL
COLOR lamp in aluminium.

Materiale
alluminio

Temperatura colore
RGB full color + 6000K



Driver
DC 12/24V
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
aluminum

Colour temperature
RGB full color + 6000K



Driver
DC 12/24V
not included

Life time and on/off
50.000h
>25.000 on/off



LED-IRIDE-3P
8031440358101
lumen




colour temp. | colour
RGB

LED-IRIDE-3P-BCO
8031440359719
lumen

colour temp. | colour
240 lm

watt | 3 x 1W
driver | DC12/24V
beam angle | 45°

watt | 3 x 1W
driver | DC12/24V
beam angle | 30°

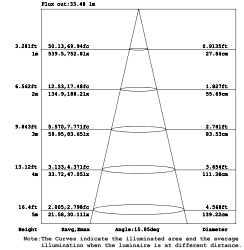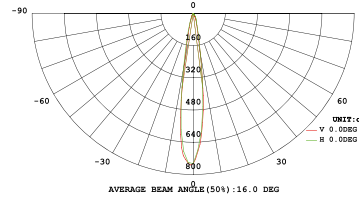

LED-IRIDE-9P
8031440358118
lumen




colour temp. | colour
RGB

LED-IRIDE-9P-BCO
8031440359702
lumen

colour temp. | colour
720 lm

watt | 9 x 1W
driver | DC12/24V
beam angle | 40°

watt | 9 x 1W
driver | DC12/24V
beam angle | 30°

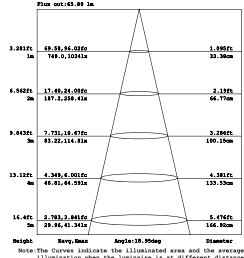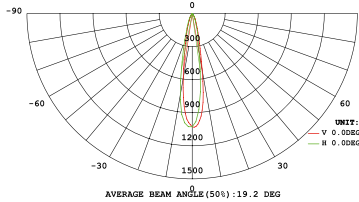

LED-IRIDE-18P
8031440358088
lumen




colour temp. | colour
RGB

LED-IRIDE-18P-BCO
8031440359689
lumen

colour temp. | colour
1620 lm

watt | 18 x 1W
driver | DC24V
beam angle | 40°

watt | 18 x 1W
driver | DC24V
beam angle | 30°

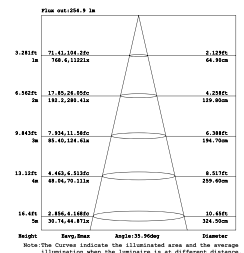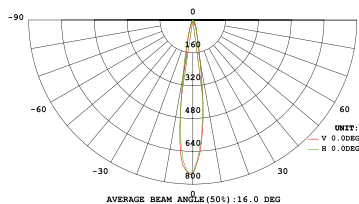

IRIDE



outdoor
use



accommodation
areas use



office
use



commercial
areas use





technical information

IRIDE



Incassi calpestabili LED RGB FULL COLOR
corpo in lega di alluminio, ghiera in acciaio 316.
 Walkable built-in LED RGB FULL COLOR light 316
 stainless steel cover and aluminium alloy housing.

Materiale
 alluminio pressofuso

Temperatura colore
 RGB full color



Driver
 DC 12/24V
 non incluso

Durata e on/off
 50.000h
 >25.000 on/off

Material
 die cast aluminum

Colour temperature
 RGB full color



Driver
 DC 12/24V
 not included

Life time and on/off
 50.000h
 >25.000 on/off



LED-IRIDE-R6





8031414868971

lumen

colour temp. | colour
 RGB

recessed box

watt | 3 x 1W
 driver | DC12/24V
 beam angle | 15°

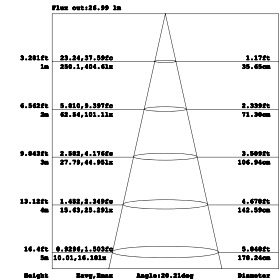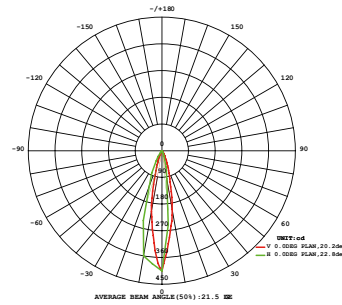

LED-IRIDE-R12




8031414868988

lumen

colour temp. | colour
 RGB

recessed box

watt | 9 x 1W
 driver | DC12/24V
 beam angle | 15°

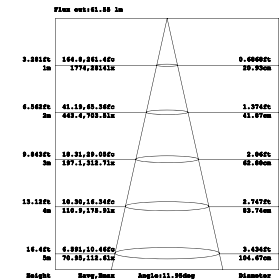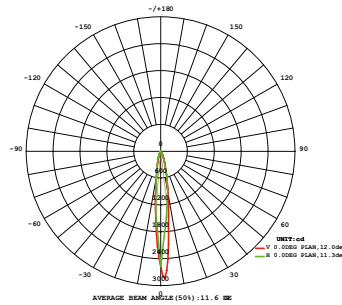

LED-IRIDE-R14




8031414868995

lumen


colour temp. | colour
 RGB

recessed box

watt | 18 x 1W
 driver | DC12/24V
 beam angle | 15°

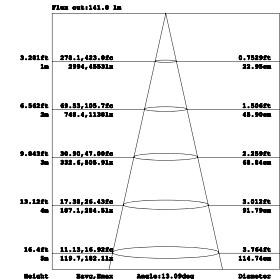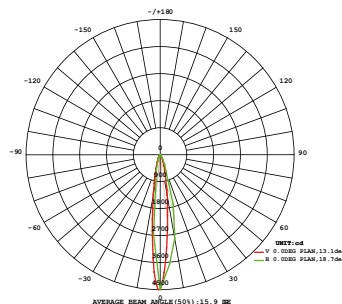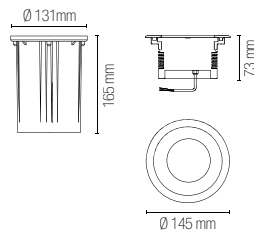

NEPTUNE



Materiale
acciaio inox 316

Colore
silver
nero



Temperatura colore
RGB full color



Driver
DC24V
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
316 stainless steel

Colour
black
silver



Colour temperature
RGB full color




Driver
DC24V
not included

Life time and on/off
50.000h
>25.000 on/off



Proiettori per fontane LED RGB FULL COLOR.
LED RGB FULL COLOR fountain flood lamp.



LED-NEPTUNE-3P
8031414869008
lumen




watt $3 \times 3W$
beam angle 25°


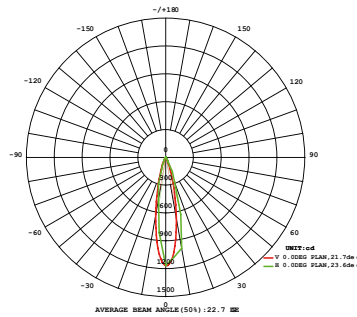



Height	Beam, Min	Beam, Max	Angle	Beam, Max
1.381ft	79.48	108.250	1.387ft	30.350m
2.625ft	18.87	27.050	2.634ft	70.64m
3.869ft	8.164	13.050	3.770ft	114.96m
5.113ft	4.390	6.700	5.039ft	152.01m
6.357ft	2.920	4.350	6.380ft	191.05m

LED-NEPTUNE-36P
8031440358057
lumen




watt $36 \times 1W$
beam angle 45°

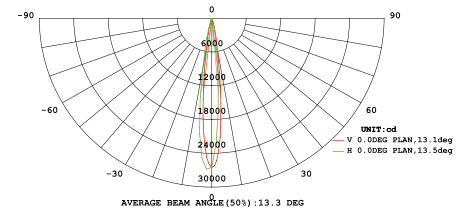

Height	Beam, Min	Beam, Max	Angle	Beam, Max
1.381ft	1600	2488	2.743ft	23.28m
2.625ft	422	642	3.535ft	46.57m
3.869ft	181	276	4.201ft	69.81m
5.113ft	105	155	5.054ft	91.15m
6.357ft	67	99	5.821ft	114.50m

CROWN

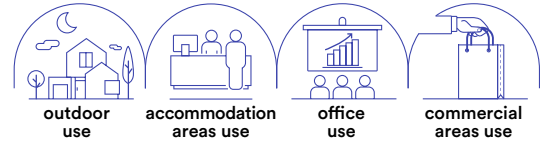

Materiale
acciaio inox 316

Temperatura colore
RGB full color



Driver
DC24V
non incluso

Durata e on/off
50.000h
>25.000 on/off

Material
316 stainless steel

Colour temperature
RGB full color




Driver
DC24V
not included

Life time and on/off
50.000h
>25.000 on/off



Incasso per fontane LED RGB FULL COLOR.
LED RGB FULL COLOR fountain recess lamp.



LED-CROWN-R14
8031414869015
lumen



watt 9 x 2W
beam angle 25°

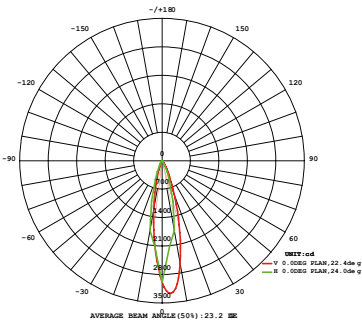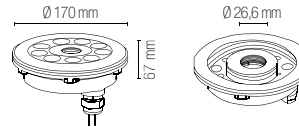

Flux out: 250,4 lm

Height	Beam diam	Beam angle	Flux out
2.000m	189,3, 200,1cm	23,2°	2.000lm
1m	104,1, 209,1cm	23,2°	90,79cm
0.500m	48,07, 78,03cm	23,2°	2.000lm
2m	480,2, 897,81cm	23,2°	79,89cm
0.250m	23,03, 39,01cm	23,2°	2.000lm
1m	230,3, 390,1cm	23,2°	119,05cm
0.125m	11,51, 19,50cm	23,2°	2.000lm
1m	115,1, 195,0cm	23,2°	119,05cm
0.0625m	5,75, 9,75cm	23,2°	2.000lm
1m	57,5, 97,5cm	23,2°	119,05cm



TREVIS





technical information

TREVIS



Incasso immersione LED RGB FULL COLOR.
Immersion recessed light LED RGB FULL COLOR.

Materiale
acciaio inox 316

Temperatura colore
RGB full color



Driver
DC 24V
non incluso

Durata e on/off
50.000h
>25.000 on/off


Material
316 stainless steel

Colour temperature
RGB full color



Driver
DC 24V
not included

Life time and on/off
50.000h
>25.000 on/off





LED-TREVIS-R7
8031414869022
lumen


watt 3W
beam angle 25°

colour temp. colour recessed box

RGB

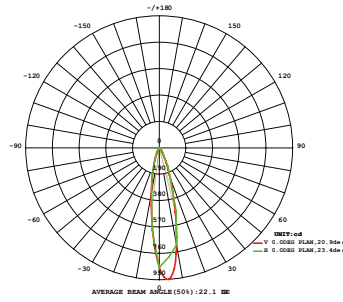

Height	Beam Diameter	Angle	Diameter
3.0812m	7.960, 21.962cm	25.000°	97.94cm
4.0822m	1.966, 5.073cm	25.000°	124.00cm
5.0832m	0.9729, 2.502cm	25.000°	170.00cm
6.0842m	0.4915, 1.250cm	25.000°	220.00cm
7.0852m	0.2515, 0.640cm	25.000°	280.00cm
8.0862m	0.1316, 0.330cm	25.000°	350.00cm




LED-TREVIS-R11
8031414869039
lumen

watt 9W
beam angle 25°

colour temp. colour recessed box

RGB

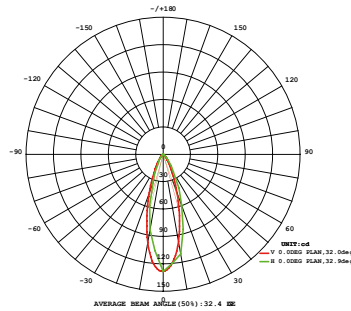


Height	Beam Diameter	Angle	Diameter
12m	66.31, 87.55cm	25.000°	34.60cm
16m	14.00, 21.99cm	25.000°	73.70cm
20m	6.237, 8.787cm	25.000°	110.00cm
24m	3.289, 4.472cm	25.000°	147.00cm
28m	1.929, 2.592cm	25.000°	184.00cm
32m	1.157, 1.561cm	25.000°	220.00cm

LUCI DECORATIVE TECNICHE DMX / DMX TECHNICAL DECORATION LIGHTING

In.tec light

PAR56

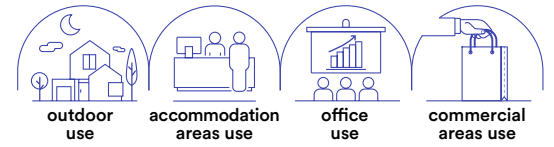

Materiale
policarbonato

Temperatura colore
RGB full color + 6500K



Driver

AC 12V non incluso
DC 24V non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

PC

Colour temperature
RGB full color + 6500K





Driver

AC 12V not included
DC 24V not included

Life time and on/off

50.000h
>25.000 on/off



Incasso LED a immersione per piscine.
Pool immersion LED down light.

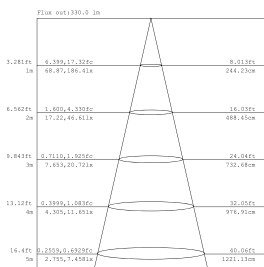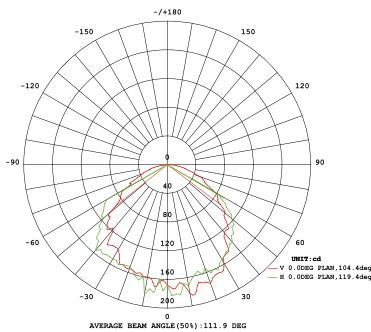


	colour temp.	colour
LED-PAR56-24V-RGB 8031414879755		
lumen	RGB	
watt		21W
driver		DC24V
beam angle		45°
1 m cable included		

	colour temp.	colour
LED-PAR56-BCO 8031440359504		
lumen	1050 lm	
watt		21W
driver		12V AC
beam angle		45°

INC-POOL-PAR56 8031440359511
Struttura incasso per PAR 56 per piscine in cemento / Recessed structure for PAR56 for concrete swimming pool
1 m cable included
Ø 260 mm

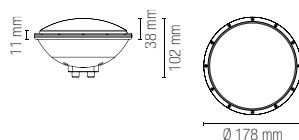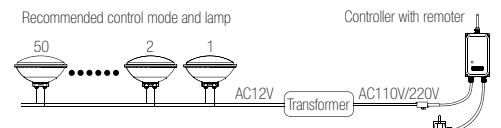

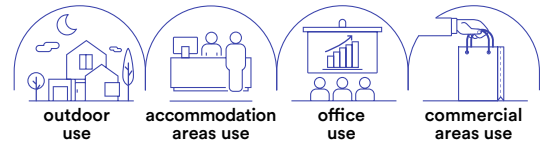

Materiale
policarbonato

Temperatura colore
RGB full color + 6500K



Driver

AC 12V non incluso
DC 24V non incluso

Durata e on/off

50.000h
>25.000 on/off

Material

PC

Colour temperature
RGB full color + 6500K



Driver

AC 12V not included
DC 24V not included

Life time and on/off

50.000h
>25.000 on/off

**Lampada LED per piscine
con fissaggio a parete.**
Pool LED wall lamp.



LED-PELPS24V-RGB

8031414868872

lumen

watt

driver

beam angle

1 m cable included

colour temp.



RGB

colour



18W

DC24V

45°

LED-PELPS-BCO

8031414865420

lumen

watt

driver

beam angle




1122 lm

18W

AC12V

45°



CONTROLLER






CONTROLLER-POOL

8031440359481

Controller 240V
AC MAX 5A/1100W
IP65 distanza max 30M

Controller 240V
AC max 5A/1100W
IP65 max distance 30M

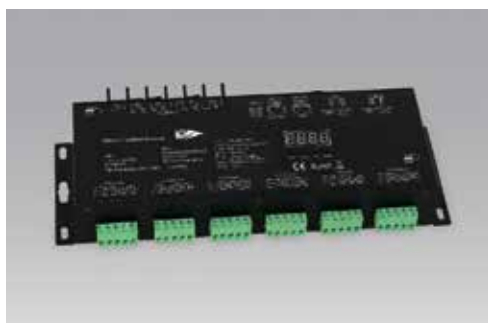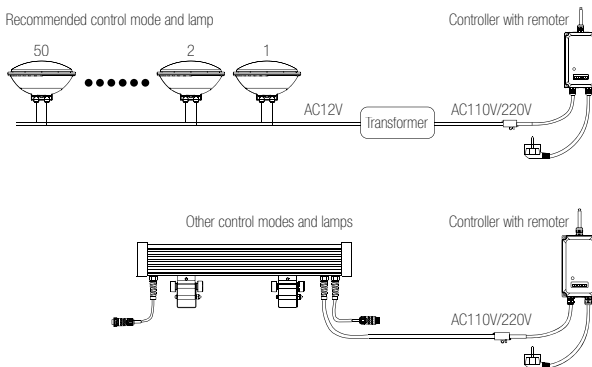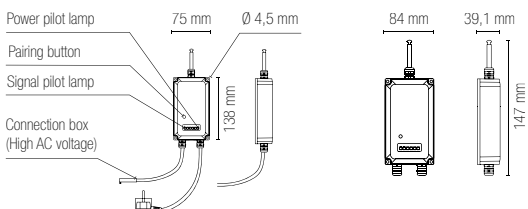

CONTROLLER-DMX-24

8031414872718

Controller DMX 24 canali
Tensione costante 4A
Input VOLTAGE 12/24V DC
Output POWER 24X(48-96)W
Output CURRENT 24X4A

Controller DMX 24 channels
Constant voltage 4A
Input VOLTAGE 12/24V DC
Output POWER 24X(48-96)W
Output CURRENT 24X4A

264,5 × 83 × 42 mm



SPLITTER-DMX-4

8031440359542

SPLITTER DMX
6W XLR-3X4PCS XLR-5X4PCS

DMX SPLITTER
6W XLR-3X4PCS XLR-5X4PCS



CONTROLLER




CONTROLLER-CTR-RGB

8031440358026

Centralina di comando
C/PORTA DMX512 LED RGB
Input 230V AC
Output DC (12V 144W - 24V 300W)
6 porte da 3 canali RGB

Control box with DMX512
Port for LED RGB
Input 230V AC
Output DC (12V 144W - 24V 300W)
6 ports 3 RGB channels

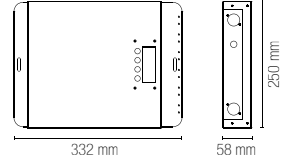


CONTROLLER-CTR-RGB12

8031440355438

Centralina di comando
C/PORTA DMX512 LED RGB
Input 230V AC
Output DC (12V 300W)
6 porte da 3 canali RGB

Control box with DMX512
Port for LED RGB
Input 230V AC
Output DC 12V 300W
6 ports 3 RGB channels

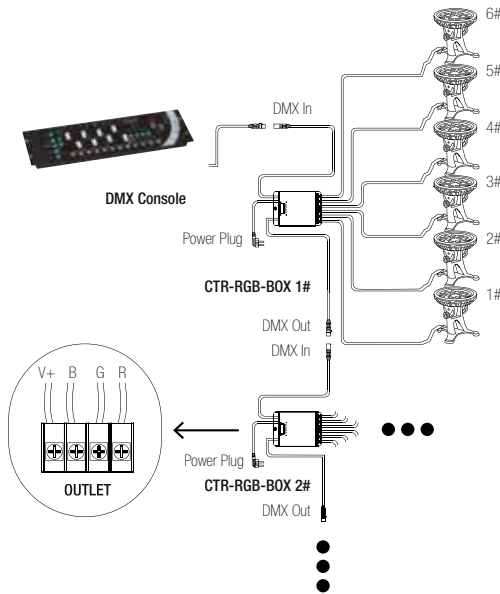


CONTROLLER-PRO-3

8031440358033

Controller Master 3 canali
per uso proiettori
in modalità EASY
IN 230V OUT DMX/XLR-3
2 canali IP20

Controller Master 3 channels
for flood in EASY MODE
IN 230V OUT DMX/XLR-3
2 channels IP20


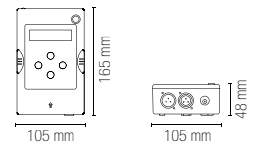


CONTROLLER-PRO-2

8031440358002

Controller DMX LED
3 canali RGB SEGNALE OUTPUT
DMX/XLR-3 (due uscite)
IP20 con cavo di ricarica


Controller DMX LED
3 channels RGB OUTPUT SIGNAL
DMX/XLR-3 (two port)
IP20 with charge cable

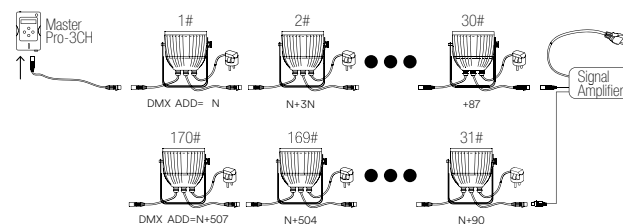

CONTROLLER



LED-SUNLITE-DE3
8031440359498
SUNLITE 2X512 DMX ESA PRO/SUITE 2




CONTROLLER

LED-SUNLITE-U9 8031440359467

SUNLITE Controller
256 canali Input
(218 steps max)


SUNLITE Controller
256 channels Input
(218 steps max)



LED-SUNLITE-GU2 8031422251093
















SUNLITE DMX STICK-GU2
128 canali Input 240V

SUNLITE DMX STICK-GU2
128 channels Input 240V















COMPONENTISTICA
LIGHTING COMPONENTS

Accessori / Accessories

	TRASFORMATORE-120 8031440355094 Trasformatore di tensione 120W Input 240V AC Output 12V AC IP44 10A	 IP44	180 × 134 × 63 mm
	LED-IRIDE-CAVO-2M-2P 8031440355452 Cavo 2 poli per faretto IRIDE bianco alluminio	 IP65	2 metri / 2 meters
	LED-IRIDE-CAVO-2M 8031440358095 Cavo RGB 4 poli per faretto IRIDE RGB bianco alluminio	 IP65	2 metri / 2 meters
	CONNETTORE-M 8031440355469 Connettore maschio per DMX	 IP68	Male connector for DMX
	CONNETTORE-F 8031440355476 Connettore femmina per DMX	 IP68	Female connector for DMX
	CONNECTBOX-IP68-3 8031440358903 Scatola connessione a tre poli	 IP68	35 × 115 × 71 mm
	CONNECTBOX-IP68-2 8031440358927 Scatola connessione a due poli	 IP68	30 × 115 × 41 mm
	GUAINA 8031440355483 Guaina isolante	 IP65	Insulating sheath
	CONNETTORE-IP20 8031414897681 Connettore IP20 2L+2N		IP20 2L+2N Connector
	CONNETTORE-IP65 8031414897698 Connettore IP65	 IP65	IP65 Connector
	CONNETTORE-IP68 8031414897704 Connettore IP68	 IP68	IP68 Connector

DRIVER

Driver MINI and LT

	I-DRIVER/4W 8031414862801 MINI Driver corrente costante Output 2-12V 350mA 4W Input 100 ~ 240V	 MINI constant current driver Output 2-12V 350mA 4W Input 100 ~ 240V	38 × 27 × 21 mm
	I-DRIVER/4W-24V 8031414871797 MINI Driver corrente costante Output 24V DC 0.17A 4W Input 100 ~ 240V AC 50 ~ 60H	 MINI constant voltage driver Output 24V DC 0.17A 4W Input 100 ~ 240V AC 50 ~ 60H	38 × 27 × 21 mm
	I-DRIVER-LT-75-24 8031414876822 LT Driver tensione costante Output 24VDC 3.12A 75W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 3.12A 75W Input 220 ~ 240V AC	305 × 30 × 17 mm
	I-DRIVER-LT-150-24 8031414876846 LT Driver tensione costante Output 24V DC 6.25A 150W Input 220 ~ 240V AC	LT constant voltage driver Output 24V DC 6.25A 150W Input 220 ~ 240V AC	336 × 30 × 17 mm
	I-DRIVER-LT-30-24 8031414896196 LT Driver tensione costante Output 24VDC 1.25A 30W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 1.25A 30W Input 220 ~ 240V AC	251 × 30 × 16 mm
	I-DRIVER-LT-60-24 8031414896202 LT Driver tensione costante Output 24VDC 2.5A 60W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 2.5A 60W Input 220 ~ 240V AC	305 × 30 × 18,2 mm
	I-DRIVER-LT-100-24 8031414896226 LT Driver tensione costante Output 24VDC 4.17A 100W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 4.17A 100W Input 220 ~ 240V AC	312 × 30 × 18,2 mm
	I-DRIVER-LT-200-24 8031414896240 LT Driver tensione costante Output 24VDC 8.34A 200W Input 220 ~ 240V AC	LT constant voltage driver Output 24VDC 8.34A 200W Input 220 ~ 240V AC	335 × 30 × 21,6 mm
	I-DRIVER-LT-60-48 8031414896219 LT Driver tensione costante Output 48VDC 1.25A 60W Input 220 ~ 240V AC	LT constant voltage driver Output 48VDC 1.25A 60W Input 220 ~ 240V AC	305 × 30 × 18,2 mm
	I-DRIVER-LT-150-48 8031414896233 LT Driver tensione costante Output 48VDC 3.125A 150W Input 220 ~ 240V AC	LT constant voltage driver Output 48VDC 3.125A 150W Input 220 ~ 240V AC	335 × 30 × 21,6 mm

ALIMENTATORI POWER SUPPLY

Alimentatori tensione costante LRS e RSP 12V /
Constant voltage power supply LRS and RSP 12V



STRIP-DRIVER12V-35W

8031440360265

Output 12V 3A 36W
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 82 × 30 mm



STRIP-DRIVER12V-50W

8031414866779

Output 12V 4.2A 50W
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 82 × 30 mm



STRIP-DRIVER12V-75W

8031439581268

Output 12V 6A 72W
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 97 × 30 mm



STRIP-DRIVER12V-100W

8031440359368

Output 12V 8.5A 102W
Input 85 ~ 264VAC 120 ~ 373VDC

129 × 97 × 30 mm



STRIP-DRIVER12V-150W

8031439611262

Output 12V 12.5A 150W
Input 85 ~ 132VAC / 170 ~ 264VAC
by switch
240 ~ 370VDC (switch on 230VAC)

159 × 97 × 30 mm



STRIP-DRIVER12V-200W

8031440359375

Output 12V 16.7A 200W
Input 85 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm



STRIP-DRIVER12V-320W

8031440359344

Output 12V 26.7A 320W
Input 88 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm

ALIMENTATORI POWER SUPPLY

Alimentatori tensione costante LRS e RSP 24V /
Costant voltage power supply LRS and RSP 24V



STRIP-DRIVER24V-35W

8031414870943

Output 24V 1,5A 36W
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 82 × 30 mm



STRIP-DRIVER24V-50W

8031440364744

Output 24V 2,2A 52W
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 82 × 30 mm



STRIP-DRIVER24V-75W

8031414870950

Output 24V 3,2A 76W
Input 85 ~ 264VAC 120 ~ 373VDC

99 × 97 × 30 mm



STRIP-DRIVER24V-100W

8031440364751

Output 24V 4,5A 108W
Input 85 ~ 264VAC 120 ~ 373VDC

129 × 97 × 30 mm



STRIP-DRIVER24V-150W

8031414870967

Output 24V 6,5A 156W
Input 85 ~ 132VAC / 170 ~ 264VAC
by switch
240 ~ 370VDC (switch on 230VAC)

159 × 97 × 30 mm



STRIP-DRIVER24V-200W

8031440364737

Output 24V 8,4A 201W
Input 85 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm



STRIP-DRIVER24V-320W

8031414864959

Output 24V 13,4A 321W
Input 88 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm

ALIMENTATORI POWER SUPPLY



I-DRIVER-UHP-200-24

8031414896387

Output 24V 8.4A 200W
Input 90 ~ 264VAC 127 ~ 370VDC

194 × 55 × 26 mm

Alimentatori
tensione costante
UHP 24V /
Costant voltage
power supply
UHP 24V



I-DRIVER-UHP-350-24

8031414879618

Output 24V 14.6A 350W
Input 90 ~ 264VAC 127 ~ 370VDC

220 × 62 × 31 mm

senza ventola / without fan



I-DRIVER-UHP-500-24

8031414879625

Output 24V 20.9A 501W
Input 90 ~ 264VAC 127 ~ 370VDC

220 × 62 × 31 mm

senza ventola / without fan

Alimentatori
tensione costante
RSP 36V /
Costant voltage
power supply
RSP 36V



STRIP-DRIVER36V-200W

8031414870974

Output 36V 5.56A 200W
Input 88 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm



STRIP-DRIVER36V-320W

8031414864829

Output 36V 8.9A 320W
Input 88 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm

Alimentatori
tensione costante
RSP 48V /
Costant voltage
power supply
RSP 48V



STRIP-DRIVER48V-75W

8031414881536

Output 48V 1.6A 76,8W
Input 88 ~ 264VAC 124 ~ 370VDC

99 × 97 × 30 mm



STRIP-DRIVER48V-150W

8031414881529

Output 48V 3.3A 158,4W
Input 85 ~ 132VAC 240 ~ 370VDC

159 × 97 × 30 mm



STRIP-DRIVER48V-200W

8031414878307

Output 48V 4.2A 201W
Input 88 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm



STRIP-DRIVER48V-320W

8031414878314

Output 48V 4.2A 201W
Input 88 ~ 264VAC 124 ~ 370VDC

215 × 115 × 30 mm

DRIVER

Driver LPHC
LPH and LCM



I-DRIVER/18W-24V
8031414875351



LPH
Output 24V 0.75A 18W
Input 180 ~ 264VAC 254 ~ 370VDC

140 × 30 × 22 mm



I-DRIVER/18W
8031439571269



LPHC
Output 6~48V 350mA 16,8W
Input 180 ~ 264VAC

140 × 30 × 22 mm



I-DRIVER-DIMM-LCM25
8031414924653

LCM dimmable 42W
Output DC 0~54V 350mA; 6~50V
500mA; 6~42V 600mA; 6~36V
700mA; 6~28V 900mA; 6~24V
1050mA
Input 180 ~ 277VAC 254~392VDC

105 × 68 × 23 mm



I-DRIVER-DIMM-LCM40
8031439591267



LCM dimmable 42W
Output DC 2~100V 350mA; 2~80V
500mA; 2~67V 600mA; 2~57V
700mA; 2~45V 900mA; 2~40V
1050mA
Input 180 ~ 295VAC 254~417VDC

123,5 × 81,5 × 23 mm



I-DRIVER-DIMM-LCM60
8031439561260



LCM dimmable 60W
Output DC 2~90V 500mA; 2~90V
600mA; 2~86V 700mA; 2~67V
900mA; 2~57V 1050mA; 2~42V
1400mA
Input 180 ~ 295VAC 254~417VDC

123,5 × 81,5 × 23 mm



I-DRIVER-DIMM-LCM25DA
8031414924660



LCM dimmable 42W
Output DC 0~54V 350mA; 6~50V
500mA; 6~42V 600mA; 6~36V
700mA; 6~28V 900mA; 6~24V
1050mA
Input 180 ~ 277VAC 254~380VDC(254~375VDC for DA2-Type)

105 × 68 × 23 mm



I-DRIVER-DIMM-LCM40DA
8031414924677



LCM dimmable 42W
Output DC 2~100V 350mA; 2~80V
500mA; 2~67V 600mA; 2~57V
700mA; 2~45V 900mA; 2~40V
1050mA
Input 180 ~ 295VAC 254 ~ 392VDC

123,5 × 81,5 × 23 mm



I-DRIVER-DIMM-LCM60DA
8031414924684



LCM dimmable 60W
Output DC 2~90V 500mA; 2~90V
600mA; 2~86V 700mA; 2~67V
900mA; 2~57V 1050mA; 2~42V
1400mA
Input 180 ~ 295VAC 254 ~ 392VDC

123,5 × 81,5 × 23 mm

Driver HLG
IP67 12-24V



I-DRIVER-HLG-320-12
8031440360258



Output 12V 22A 264W
Input 90 ~ 305VAC 127 ~ 431VDC

252 × 90 × 43,8 mm

DRIVER

Driver ELG 24V IP67 dimmerabili e LPV 24V IP67 / Dimmable driver ELG 24V IP67 and LPV 24V IP67

	I-DRIVER-ELG-100-24	
	8031414876914 ELG Dimmable Output 24V 4A 100W Input 100 ~ 305VAC 142 ~ 431VDC continue 320VAC for 24Hrs; 360VAC for 1Hr	199 × 63 × 35,5 mm
	I-DRIVER-ELG-100-24DA	
	8031414876921 ELG Dimmable DALI Output 24V 4A 100W Input 100 ~ 305VAC 142 ~ 431VDC continue 320VAC for 24Hrs; 360VAC for 1Hr	
	I-DRIVER-ELG-150-24	
	8031414876891 ELG Dimmable Output 24V 6.25A 150W Input 100 ~ 305VAC 142 ~ 431VDC	219 × 63 × 35,5 mm
	I-DRIVER-ELG-150-24DA	
	8031414876907 ELG Dimmable DALI Output 24V 6.25A 150W Input 100 ~ 305VAC 142 ~ 431VDC	
	I-DRIVER-ELG-240-24	
	8031414876877 ELG Dimmable Output 24V 10A 240W Input 100 ~ 305VAC 142 ~ 431VDC	244 × 71 × 37,5 mm
	I-DRIVER-ELG-240-24DA	
	8031414876884 ELG Dimmable DALI Output 24V 10A 240W Input 100 ~ 305VAC 142 ~ 431VDC	
	I-DRIVER-LPV-60-24	
	8031414876839 LPV Output 24V 2.5A 60W Input 90 ~ 264VAC 127 ~ 370VDC	162,5 × 42,5 × 32 mm
	I-DRIVER-LPV-100-24	
	8031414876853 LPV Output 24V 4.2A 100W Input 90 ~ 264VAC 127 ~ 370VDC	190 × 52 × 37 mm
	I-DRIVER-LPV-150-24	
	8031414876860 LPV Output 24V 6.3A 150W Input 180 ~ 305VAC 254 ~ 431VDC	191 × 63 × 37,5 mm













DRIVER

Driver XLG 24V IP67

 	I-DRIVER-XLG-75-24 8031414873708 Output 24V 3.1A 75W Input 100 ~ 305VAC 142 ~ 431VDC	 IP67	140 × 63 × 32 mm
 	I-DRIVER-XLG-100-24 8031414879595 Output 24V 4A 100W Input 100 ~ 305VAC 142 ~ 431VDC	 IP67	140 × 63 × 32 mm
 	I-DRIVER-XLG-150-24 8031414879601 Output 24V 6.25A 150W Input 100 ~ 305VAC 142 ~ 431VDC	 IP67	180 × 63 × 35,5 mm
 	I-DRIVER-XLG-200-24 8031414879588 Output 24V 8.3A 200W Input 100 ~ 305VAC 142 ~ 431VDC	 IP67	199 × 63 × 35,5 mm

DRIVER

Driver PWM DALI2

 	I-DRIVER-PWM-60-24DA 8031414896356 Output 24V 2.5A 60W Input 90 ~ 305VAC 127 ~ 431VDC DALI2	  IP67	150 × 53 × 35 mm
 	I-DRIVER-PWM-120-24DA 8031414896363 Output 24V 5A 120W Input 90 ~ 305VAC 127 ~ 431VDC DALI2	  IP67	191 × 63 × 37,5 mm
 	I-DRIVER-PWM-200-24DA 8031414896370 Output 24V 8.3A 200W Input 100 ~ 305VAC 142 ~ 431VDC DALI2	  IP67	195 × 68 × 39,5 mm

DRIVER

Guida DIN a forma di gradino ultra sottile / Ultra Slim Step Shape DIN Rail



I-DRIVER-HDR-60-24

8031414896271

Output 24V 2.5A 60W
Input 85 ~ 264VAC
(277VAC operational) 120 ~ 370VDC
(390VAC operational)

52,5 × 90 × 54,5 mm



I-DRIVER-HDR-100-24

8031414896288

Output 24V 3.83A 100W
Input 85 ~ 264VAC
(277VAC operational) 120 ~ 370VDC
(390VAC operational)

70 × 90 × 54,5 mm



I-DRIVER-HDR-150-24

8031414896295

Output 24V 6.25A 150W
Input 85 ~ 264VAC
(277VAC operational) 120 ~ 370VDC
(390VAC operational)

105 × 90 × 54,5 mm

DRIVER

Guida DIN industriale a uscita singola / Single Output Industrial DIN RAIL



I-DRIVER-NDR-240-24

8031414896301

Output 24V 10A 240W
Input 90 ~ 264VAC 127 ~ 370VDC

63 × 125,2 × 113,5 mm



I-DRIVER-NDR-480-24

8031414896325

Output 24V 20A 480W
Input 90 ~ 264VAC 127 ~ 370VDC

85,5 × 125,2 × 128,5 mm



I-DRIVER-NDR-240-48

8031414896318

Output 48V 5A 240W
Input 90 ~ 264VAC 127 ~ 370VDC

63 × 125,2 × 113,5 mm



I-DRIVER-NDR-480-48

8031414896332

Output 48V 10A 480W
Input 90 ~ 264VAC 127 ~ 370VDC

85,5 × 125,2 × 128,5 mm

DRIVER

Guida DIN industriale a uscita singola con funzione PFC / Single Output Industrial DIN RAIL with PFC Function






I-DRIVER-SDR-960-24

8031414896349

Output 24V 40A 960W
Input 180 ~ 264VAC 254 ~ 370VDC

110 × 125,2 × 150 mm

DIMMER

	I-DIMMER-D1-10 8031414877959 D1-10 dimmer Dimming range 1%-100% 1-10V 40mA	D1-10 dimmer Dimming range 1%-100% 1-10V 40mA	22,5 × 22,5 × 48,6 mm
	I-DIMMER-D1-10S 8031414896257 D1-10 dimmer Dimming range 1%-100% 1-10V 40mA	D1-10 dimmer Dimming range 1%-100% 1-10V 40mA	83,5 × 83,5 × 44 mm
	I-DIMMER-D350S 8031414896264 Dimmer a taglio di fase 220~240VAC 10~350W 1.5A	Trailing edge dimmer 220~240VAC 10~350W 1.5A	83,5 × 83,5 × 44 mm

DRIVER


Driver emergenza / Emergency driver

	I-DRIVER-EMERGENCY 8031414864751 Driver di emergenza 6-60V 400-40mA 4W 180Min Batteria 3,6V 3.0Ah Ni-Cd	Emergency driver 6-60V 400-40mA 4W 180Min Battery 3,6V 3.0Ah Ni-Cd	160 × 38 × 28 mm
	I-DRIVER-HELP 8031414862559 Driver di emergenza Output Voltage 10-120V Input Voltage 85-265V 3-40W. emergenza 120 min. 18650 Li-Ion Battery 3,7V 2.4Ah	Emergency driver Output Voltage 10-120V Input Voltage 85-265V 3-40W. emergency 120 min. 18650 Li-Ion Battery 3,7V 2.4Ah	131 × 55 × 21 mm
	I-DRIVER-HELP-HV 8031414882595 Emergency output voltage 230V AC, adatto per: 2,5W emergency power 3 hours emergency time 3,5W emergency power 2 hours emergency time 5W emergency power 1,5 hours emergency time Battery 18650 LiFePO4 6.4V 1500mAh	Emergency output voltage 230V AC, suitable for: 2,5W emergency power 3 hours emergency time 3,5W emergency power 2 hours emergency time 5W emergency power 1,5 hours emergency time Battery 18650 LiFePO4 6.4V 1500mAh	160 × 38 × 28 mm

DRIVER




	I-DRIVER-60-24 8031414897797 Output 24V 2.5A 60W Input 176 ~ 264VAC 176~370VDC	178 × 53 × 23 mm
	I-DRIVER-60-24-IP67 8031414897841 Output 24V 2.5A 60W Input 176 ~ 264VAC	 160 × 50 × 31 mm
	I-DRIVER-100-24 8031414897803 Output 24V 4.1A 100W Input 176 ~ 264VAC 250 ~ 360VDC	188 × 53 × 23 mm
	I-DRIVER-100-24-IP67 8031414897858 Output 24V 4.2A 100W Input 176 ~ 264VAC	 220 × 50 × 31 mm
	I-DRIVER-150-24 8031414897810 Output 24V 6.3A 150W Input 175 ~ 264VAC 176 ~ 370VDC	220 × 53 × 23 mm
	I-DRIVER-150-24-IP67 8031414897865 Output 24V 6.25A 150W Input 176 ~ 264VAC	 230 × 65 × 21 mm
	I-DRIVER-200-24 8031414897827 Output 24V 8.3A 200W Input 175 ~ 264VAC 175 ~ 370VDC	274 × 53 × 23 mm
	I-DRIVER-200-24-IP67 8031414897872 Output 24V 8.3A 200W Input 175 ~ 264VAC	 230 × 65 × 31 mm
	I-DRIVER-300-24 8031414897834 Output 22-24V 11.5A 300W Input 175 ~ 264VAC 175 ~ 370VDC	230 × 65 × 31 mm
	I-DRIVER-DELO42 8031414897667 Output 6-38/40/42 VDC 0.45-1.10A 42W Input 220 ~ 240VAC DALI2 PUSH DIM	103 × 68,5 × 30,5 mm

DIMMER













	STRIP-SOUND 8031434531213		
	Ricevitore musicale + telecomando RGB 12V per strip LED	Musical control receiver RGB 12V for strip LED + remote control	50 × 70 × 20 mm

ADATTATORI POWER SUPPLY

Adattatore tensione costante /
Costant voltage power supply

	STRIP-ADAT-12W 8031433141208		
	12V 12W - Spina CEE 7/16 IP20 Output 12V 1A Input 110-240V 0,5A IP20 - CLASSE 2		38 × 67 × 42 mm cavo/cable 1500 mm
	STRIP-ADAT-24W 8031433251204		
	12V 24W - Spina CEE 7/16 IP20 Output 12V 2A Input 110-240V 0,6A IP20 - CLASSE 2		38 × 80 × 50 mm cavo/cable 1500 mm
	STRIP-ADAT-36W 8031436601235		
	LED 12V 36W - Spina CEE 7/16 IP20 Output 12V 3A Input 110-240V 0,6A IP20 - CLASSE 2		35 × 100 × 50 mm cavo/cable 1500 mm






REMOTE CONTROL

	<p>RF-WALLPAD-1CH 8031414876426</p> <p>Wallpad RF 2.4G controllo dimmer-varialuce 4 zone 1 canale 2xAAA non include</p>	<p>RF 2.4G wallpad dimming light 4 zone 1 channel 2xAAA not included</p>	 86 × 86 × 36,5 mm
	<p>RF-WALLPAD-2CH 8031414876433</p> <p>Wallpad RF 2.4G controllo CCT bianco dinamico 4 zone 2 canali 2xAAA non include</p>	<p>RF 2.4G wallpad CCT adjustable white 4 zone 2 channels 2xAAA not included</p>	 86 × 86 × 36,5 mm
	<p>RF-WALLPAD-5CH 8031414876440</p> <p>Wallpad RF 2.4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 2xAAA non include</p>	<p>RF 2.4G wallpad RGB/RGBW/RGB+CCT 4 zone 5 channels 2xAAA not included</p>	 86 × 86 × 36,5 mm
	<p>RF-DMXPAD-1CH 8031414876457</p> <p>Wallpad RF 2.4G controllo dimmer-varialuce 4 zone 1 canale 230V collegabile con protocollo DMX 512</p>	<p>RF 2.4G wallpad dimming light 4 zone 1 channel 230V linkable with DMX512 protocol</p>	 120 × 80 × 37 mm formato universale per cassetta 503 / universal size for 503 box
	<p>RF-DMXPAD-2CH 8031414876464</p> <p>Wallpad RF 2.4G controllo CCT bianco dinamico 4 zone 2 canali 230V collegabile con protocollo DMX 512</p>	<p>RF 2.4G wallpad CCT adjustable white 4 zone 2 channels 230V collegabile con protocollo DMX 512</p>	 120 × 80 × 37 mm formato universale per cassetta 503 / universal size for 503 box
	<p>RF-DMXPAD-5CH 8031414876471</p> <p>Wallpad RF 2.4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 230V collegabile con protocollo DMX 512</p>	<p>RF 2.4G wallpad RGB/RGBW/RGB+CCT 4 zone 5 channels 230V collegabile con protocollo DMX 512</p>	 120 × 80 × 37 mm formato universale per cassetta 503 / universal size for 503 box


REMOTE CONTROL

	<p>RF-COM-1CH 8031414876402</p> <p>Radiocomando RF 2.4G controllo dimmer-varialuce 4 zone 1 canale 2xAAA non include</p>	<p>RF 2.4G remote control dimming light 4 zone 1 channel 2xAAA not included</p> 
	<p>RF-COM-2CH 8031414876396</p> <p>Radiocomando RF 2.4G controllo CCT bianco dinamico 4 zone 2 canali 2xAAA non include</p>	<p>RF 2.4G remote control CCT adjustable white 4 zone 2 channels 2xAAA not included</p> 
	<p>RF-COM-5CH 8031414876419</p> <p>Radiocomando RF 2.4G controllo RGB/RGBW/RGB+CCT 4 zone 5 canali 2xAAA non include</p>	<p>RF 2.4G remote control CCT adjustable white 4 zone 2 channels 2xAAA not included</p>  
	<p>RF-COM-5CH-1ZN 8031414897919</p> <p>Controllo RGB+CCT 1 zone Batteria CR2032</p>	<p>RGB+CCT Remote Control 1 zone Battery CR2032</p>
	<p>RF-COM-1CH-1ZN 8031414897896</p> <p>Controllo luminosità 1 zone Batteria CR2032</p>	<p>Brightness Remote Control 1 zone Battery CR2032</p>
	<p>RF-COM-2CH-1ZN 8031414897902</p> <p>Controllo CCT 1 zone Batteria CR2032</p>	<p>CCT Remote Control 1 zone Battery CR2032</p>
	<p>RF-COM-5CH-8ZN 8031414897926</p> <p>Radiocomando RF 2.4G controllo RGB/RGBW/RGB+CCT 8 zone</p>	<p>8 scene 2xAAA non include RF Remote Controller 8 zones 8 scenes Battery: 2xAAA not included</p>

REMOTE CONTROL

	<p>RF-RICEVITORE-1CH 8031414897933</p> <p>Ricevitore RF 2.4G 1 canale per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE Input 8.5A 12-24V Output 1CH 8A - 40W/96W/192W/288W</p>	<p>RF 2.4G receiver box 2 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR Input 8.5A 12-24V Output 1CH 8A - 40W/96W/192W/288W</p>	<p>97 × 33 × 18 mm</p>
	<p>RF-RICEVITORE-2CH 8031414876488</p> <p>Ricevitore RF 2.4G 2 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT Input 10.5A 12-24V Output 2CH;5A/CH - 2x(60-120)W</p>	<p>RF 2.4G receiver box 2 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR/CCT Input 10.5A 12-24V Output 2CH;5A/CH - 2x(60-120)W</p>	<p>97 × 33 × 18 mm</p>
	<p>RF-RICEVITORE-5CH 8031414876495</p> <p>Ricevitore RF 2.4G 5 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W</p>	<p>F 2.4G receiver box 5 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W</p>	<p>114 × 38 × 20 mm</p>
	<p>RF-RICEVITORE-5CH-PRO 8031414882724</p> <p>Ricevitore RF 2.4G 5 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT Input 30.5A 12-48V Output 5CH;6A/CH 12/24V 5 x (72-144)W 5CH;4A/CH 36/48V - 5x(144-192)W</p>	<p>RF 2.4G receiver box 5 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR/CCT/RGB/RGBW/RGB+CCT Input 30.5A 12-48V Output 5CH;6A/CH 12/24V 5x(72-144)W 5CH;4A/CH 36/48V - 5x(144-192)W</p>	<p>179 × 56 × 30 mm</p>
	<p>RF-RICEVITORE-4CH-IP67 8031414882717</p> <p>Ricevitore RF 2.4G 4 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/RGB/RGBW Input 20.5A 12-36V Output 4CH;5A/CH - 4x(60-180)W</p>	<p>RF 2.4G receiver box 4 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR/RGB/RGBW Input 20.5A 12-36V Output 4CH;5A/CH - 4x(60-180)W</p>	<p> IP67 176 × 78 × 38 mm</p>

REMOTE CONTROL

 <p>WI-FI SMART INTEC</p>	<p>RF-WIFI-CONTROL-5CH 8031414878710</p> <p>Ricevitore Wi-Fi + RF 2.4G 5 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W</p>	<p>Wi-Fi + RF 2.4G receiver box 5 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR /CCT/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W</p>	<p>114 × 38 × 20 mm</p> 
 <p>SMART INTEC BLUETOOTH SIG MESH</p>	<p>RF-BT-CONTROL-5CH 8031414878826</p> <p>Ricevitore Bluetooth + RF 2.4G 5 canali per WALLPAD RADIOCOMANDO WALLPAD DMX utilizzabile per SINGOLO COLORE/CCT/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W</p>	<p>Bluetooth + RF 2.4G receiver box 5 channels for WALLPAD RADIOCOMANDO WALLPAD DMX usable for SINGLE COLOR /CCT/RGB/RGBW/RGB+CCT Input 15.5A 12-24V Output 5CH;3A/CH - 5x(36-72)W</p>	<p>114 × 38 × 20 mm</p> 
	<p>RF-AMPLIFICATORE-5CH 8031414882700</p> <p>Amplificatore 5 canali Input 25.5A 12-24VDC Output 5CH;5A/ CH 12/24V - 5x(60-120)W</p>	<p>5 Channel amplifier Input 25.5A 12-24VDC Output 5CH;5A/ CH 12/24V - 5x(60-120)W</p>	<p>107 × 75 × 24,5 mm</p>
	<p>RF-AMPLIFICATORE-2CH 8031414882694</p> <p>Amplificatore 2 canali Input 16.5A 12-36VDC Output 2CH;8A/ CH 12/36V - 2x(96-288)W</p>	<p>2 Channel amplifier Input 16.5A 12-36VDC Output 2CH;8A/ CH 12/36V - 2x(96-288)W</p>	<p>175 × 45 × 27 mm</p>
	<p>RF-RIPETITORE 8031414882731</p> <p>Ripetitore di segnale RF 2.4G AC100-240V DC12-24V</p>	<p>RF 2.4G signal Repeater AC100-240V DC12-24V</p>	<p>52 × 52 × 26 mm</p>

SPI CONTROLLER



LED-FORREST-SPI 8031414927319

Controller per strip led
Pixel to Pixel effetto "RUN".

Avvio Show e spegnimento
tramite pulsante N/O.

Compatibile con strip led Pixel to
Pixel SPI WS2811 o altri protocolli.

Lunghezza strip, direzione e
velocità programmabile
tramite APP NewlabForrest.

Uscita di sincronia per
effetti di rincorsa multipli.

Pixel to Pixel LED strip
controller with "RUN" effect.

Show start and turn off via N/O button.







Compatible with Pixel to Pixel
SPI WS2811 LED strips or other protocols.

Strip length, direction and
speed programmable via
NewlabForrest APP.

Synchronization output for
multiple chasing effects.



SPI CONTROLLER

	<p>RF-CONTROL-SPI 8031414927340</p> <p>5-24VDC; 8A Input signal: RF2.4G; work with R9 remote; Output signal: SPI (TTL) Control dots: 1024 Dynamic mode: 32 kinds color light, 8 kinds white light Compatible with 49 kinds of Driving Ics</p>	<p>Compatible ICs: TM1803, TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, SK6813, UCS2903, UCS2909, UCS2912, WS2811, WS2812, WS2813, WS2815, TM1829, TLS3001, TLS3002, GW6205, MBI6120, TM1814B(RGBW), SK6812(RGBW), WS2813(RGBW), WS2814(RGBW), UCS8904B(RGBW), LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, TM1914A, GS8206, GS8208, UCS2904, SM16804, SM16825, SM16714(RGBW), UCS2603, UCS5603, SM16714D, SM16703P, UCS7604(RGBW), UCS7804(RGBW).</p> <p>97 × 33 × 18 mm</p>
	<p>RF-WIFI-CONTROL-SPI 8031414927333</p> <p>5-24VDC; 8A Input signal: Tuya APP + RF 2.4GHz; Output signal: SPI(TTL) x 2 Control dots: Max.1000 Rich dynamic effects, Multiple music rhythms, Wireless remote control Compatible with 49 kinds of RGB or RGBW LED strips</p>	<p>114 × 38 × 20 mm</p>
	<p>RF-DMX-DECODER-SPI 8031414927357</p> <p>5-24VDC Input signal: DMX512/RDM+RF 2.4G; Output signal: pixel signal Control dots: 170 pixels (RGB 510 CH); Max 900pixels Compatible with 37 kinds of Driving ICs; Numeric display Reverse Polarity Protection</p>	<p>Compatible ICs: TM1803, TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, SK6813, UCS2903, UCS2909, UCS2912, WS2811, WS2812, WS2813, WS2815, TM1829, TLS3001, TLS3002, GW6205, MBI6120, TM1814B(RGBW), SK6812(RGBW), SM16714(RGBW), SM16703P, SM16714D, WS2813(RGBW), WS2814(RGBW), UCS8904B(RGBW), LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, TM1914A, GS8206, GS8208, UCS2904, SM16804, SM16825, UCS5603, UCS2603.</p> <p>170 × 50 × 23 mm</p>
	<p>RF-PIR-CONTROL-SPI 8031414927326</p> <p>Input voltage: 5-24VDC; Output type: 2*SPI(TTL), Input type: PIR sensor + Push button Pixel number: Max 960 Comes with 2 PIR Sensors(ER-C), 1 daylight sensor and 2 PIR sensor extension line(5m) Compatible with 28 kinds driving ICs</p>	<p>Compatible ICs: TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, UCS2903, UCS2909, UCS2912, WS2811, WS2812, TM1829, TM1914A, GW6205, GS8206, GS8208, LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, SM16703P.</p> <p>186 × 86 × 25 mm</p>
	<p>RF-CONTROL-32CH-SPI 8031414927364</p> <p>Input voltage: 5-24VDC; Output voltage: 32 x (5-24)VDC; 32CH, 1A/CH; 32 x (5-24)W Output type: Constant voltage + SPI(TTL) Reverse Polarity Protection Comes with 2 PIR Sensors(ER-C) and 1 daylight sensor, 2 PIR sensor extension line(5m)</p>	<p>Compatible ICs: TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, UCS2903, UCS2909, UCS2912, WS2811, WS2812, TM1829, TM1914A, GW6205, GS8206, GS8208, LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, P9813, SK9822, SM16703P.</p> <p>186 × 86 × 25 mm</p>
	<p>RF-COM-SPI 8031414927371</p> <p>RGB/RGBW RF Remote Controller 1 zone Battery: CR2032</p>	<p>58,5 × 9 × 107 mm</p>

SENSORI SENSORS

Sensori industriali di movimento / Industrial motion sensors




LED-SENSOR-HB 8031414879731

Load capacity
400W
220V - 240V

Accessori inclusi / Included accessories




1 / function




In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.




LED-SENSOR-TP 8031414879724

Load capacity
no limitation
220V - 240V

IP65

1 / function




In un ambiente sufficientemente luminoso la lampada non si accende anche se viene rilevato movimento.

With sufficient ambient light, the light will not be switched on even if with motion signal.



In un ambiente poco luminoso il sensore accende la lampada non appena viene rilevato un movimento.

With insufficient ambient light, the sensor switches on the light when motion is detected.



Trascorso il tempo di attesa, il sensore spegne la lampada quando non viene rilevato movimento.

After elapse of hold time, the sensor switches off the light when no motion is detected.



LED-SENSOR-REMOTE 8031414879717

Radiocomando per sensori industriali. Industrial sensor remote control.

SENSORI SENSORS

Sensori adattabili a qualsiasi prodotto di Illuminotecnico /
Sensors compatible for any lighting products




I-SENSORE-360 8031435901237


IP44

Sensore PIR 230V
max 1600W 360°
distanza massima 5m.
time 10 sec. - 4 min.
lux 2 - 2000

PIR sensor 230V
max 1600W 360°
max 5m.
time 10 sec. - 4 min.
lux 2 - 2000




I-SENSORE-130 8031434401219


IP44

Sensore PIR 230V
max 1000W 130°
distanza massima 12m.
time 10 sec. - 4 min.
lux 2 - 2000
base accessoria angolare

PIR sensor 230V
max 1000W 130°
max 12m.
time 10 sec. - 4 min.
lux 2 - 2000
corner accessory base









CLAY

Prodotti in porcellana e cavi elettrici a treccia / Porcelain products and braid cables

	I-CLAY-SCADER 8031414865031	Scatola di derivazione elettrica CLAY in porcellana bianca	White porcelain external junction box CLAY	Ø 80 x H 45 mm
	I-CLAY-INTERRUTTORE 8031414865048	Interruttore rotativo CLAY in porcellana bianca 10A AC230V 50Hz	White porcelain rotating switch CLAY 10A AC230V 50Hz	Ø 65 x H 60 mm
	I-CLAY-PRESA 8031414865055	Presa elettrica CLAY polivalente in porcellana bianca 10/16A AC230V 50Hz	White porcelain universal socket CLAY 10/16A AC230V 50Hz	Ø 65 x H 37 mm
	I-CLAY-PRESA-F 8031414865062	Presa elettrica Schuko CLAY in porcellana bianca	White porcelaine Schuko socket CLAY	Ø 65 x H 50 mm
	I-CLAY-E27 8031414871117	Portalamпада CLAY in porcellana bianca E27 AC230V 50Hz	White porcelaine E27 lamp-holder AC230V 50Hz	Ø 45 x H 60 mm
	I-CLAY-E14 8031414870929	Portalamпада CLAY in porcellana bianca E14 AC230V 50Hz	White porcelaine E14 lamp-holder AC230V 50Hz	Ø 35 - H 60 mm
	I-CLAY-BASE 8031414870936	Rosone in porcellana bianca	White porcelain canopy	Ø 105 x H 30 mm
	I-CLAY-ISOLATORI 8031414865079	Kit 4 pz isolatori CLAY in porcellana bianca	White porcelain pulleys CLAY set 4 pcs	Ø 18 x H 20 mm

CLAY

Prodotti in porcellana e cavi elettrici a treccia / Porcelain products and braid cables

	I-CLAY-CAVO-BCO 8031414865086	Cavo elettrico CLAY trecciato con rivestimento tessile bianco	Twisted white fabric wire CLAY	5 m 3 × 0,75 mm
	I-CLAY-CAVO-2P-BCO 8031414865277	Cavo elettrico CLAY trecciato con rivestimento tessile bianco	Twisted white fabric wire CLAY	5 m 2 × 0,75 mm
	I-CLAY-CAVO-R25 BCO 8031414871162	Cavo elettrico CLAY trecciato con rivestimento tessile bianco	Twisted white fabric wire CLAY	25 m 2 × 0,75 mm
	I-CLAY-CAVO-ORO 8031414865093	Cavo elettrico CLAY trecciato con rivestimento tessile in oro	Gold twisted fabric wire CLAY	5 m 3 × 0,75 mm
	I-CLAY-CAVO-2P-ORO 8031414865284	Cavo elettrico CLAY trecciato con rivestimento tessile oro	Gold twisted fabric wire CLAY	5 m 2 × 0,75 mm
	I-CLAY-CAVO-R25 ORO 8031414871131	Cavo elettrico CLAY trecciato con rivestimento tessile oro	Gold twisted fabric wire CLAY	25 m 2 × 0,75 mm
	I-CLAY-CAVO-R25 MAR 8031414871148	Cavo elettrico CLAY trecciato con rivestimento tessile marrone	Brown twisted fabric wire CLAY	25 m 3 × 0,75 mm
	I-CLAY-CAVO3X1,5 BCO 8031414877980	Cavo elettrico CLAY trecciato con rivestimento tessile bianco	White twisted fabric wire CLAY	25 m 3 × 1,5 mm
	I-CLAY-CAVO3X1,5 MAR 8031414878000	Cavo elettrico CLAY trecciato con rivestimento tessile in marrone	Brown twisted fabric wire CLAY	25 m 3 × 1,5 mm
	I-CLAY-CAVO3X1,5 ORO 8031414877997	Cavo elettrico CLAY trecciato con rivestimento tessile in oro	Gold twisted fabric wire CLAY	25 m 3 × 1,5 mm

PORTALAMPADE LAMP HOLDERS

Accessori / Accessories

	I-PORTALAMPADE-E14-L 8031440354592 Portalampada E14 con copertura liscia in PET	E14 lamp holder with smooth PET cover
	I-PORTALAMPADE-E14-S 8031440354578 Portalampada E14 in PET con copertura filettata e ghiera	E14 PET lamp holder with cover threaded and ring
	I-PORTALAMPADE-E14-T 8031440354585 Portalampada E14 in PET con copertura mezza filettata con ghiera	E14 PET lamp holder with half threaded
	I-PORTALAMPADE-E27-L 8031440354554 Portalampada E27 con copertura liscia in PET	E27 lamp holder with smooth PET cover
	I-PORTALAMPADE-E27-P 8031440354561 Portalampada E27 in PBT	E27 lamp holder in PBT
	I-PORTALAMPADE-E27-S 8031440354530 Portalampada E27 in PET con copertura filettata e ghiera	E14 PET lamp holder with cover threaded and ring
	I-PORTALAMPADE-E27-T 8031440354547 Portalampada E27 in PET con copertura mezza filettata con ghiera	E14 PET lamp holder with half threaded
	I-PORTALAMPADE-GU10 8031435751221 Portalampada GU10 in PBT con cavo di 12 cm	GU10 lamp holder in PBT with 12 cm cable

PORTALAMPADE LAMP HOLDERS

Accessori / Accessories

	<p>I-PORTALAMPADE-MR16 8031439761264</p> <p>Portalamпада MR16 in PBT con cavo di 10 cm</p>	<p>Lamp holder MR16 in PBT with 10 cm cable</p>
	<p>I-PORTALAMPADE-T8 8031439851262</p> <p>Portalamпада T8 in PBT fissaggio a clip</p>	<p>Lamp holder T8 in PBT clip fixing</p>
	<p>I-PORTALAMPADE-R7S 8031414861491</p> <p>Portalamпада R7S 118 mm in PBT incluso filo da 15 cm</p>	<p>Lamp holder R7S 118 mm in PBT including 15 cm wire</p>
	<p>I-PORTALAMPADE-G9 8031414862962</p> <p>Portalamпада G9 in PBT con cavo di 10 cm</p>	<p>Lamp holder G9 in PBT with 10 cm cable</p>
	<p>INC-MATRIX-KIT 8031436651233</p> <p>Kit molle e anello per faretti incasso GU10</p>	<p>Kit springs and ring for recessed spotlights GU10</p>
	<p>CABLAGGIO 8031414865499</p> <p>Cabl. trip. cavo tondo bianco H05VV-F spina Italia 10A, 250V</p>	<p>White round cable harness H05VV-F plug Italy 10A, 250V</p> <p style="text-align: right;">2,5 m 3 × 0,75 mm</p>

ADATTATORI LAMPHOLDER ADAPTERS



ADATTATORE-E14-E27

8031439351267

Adattatore da
E14 a E27 in PET

Lamp holder adapter
from E14 to E27 in PET



ADATTATORE-E27-E14

8031439391263

Adattatore da
E27 a E14 in PET

Lamp holder adapter
from E27 to E14 in PET



ADATTATORE-E27-2E27

80314439371265

Adattatore da
E27 a 2 E27 in PET

Lamp holder adapter
from E27 to E27 in PET



ADATTATORE-E27-GU10

8031436171233

Adattatore da
E27 a GU10 in PET

Lamp holder adapter
from E27 to GU10 in PET



ADATTATORE-E14-GU10

8031439361266

Adattatore da
E14 a GU10 in PET

Lamp holder adapter
from E14 to GU10 in PET



ADATTATORE-GU10-E14

8031439431266

Adattatore da
GU10 a E14 in PET

Lamp holder adapter
from GU10 to E14 in PET



ADATTATORE-GU10-E27

8031439421267

Adattatore da
GU10 a E27 in PET

Lamp holder adapter
from GU10 to E27 in PET



ADATTATORE-G9-E27

8031439411268

Adattatore da
G9 a E27 in PET

Lamp holder adapter
from G9 to E27 in PET

ADATTATORI LAMPHOLDER ADAPTERS



ADATTATORE-G9-E14

8031439401269

Adattatore da
G9 a E14 in PET

Lamp holder adapter
from G9 to E14 in PET



ADATTATORE-E27-E27

8031439451264

Adattatore da E27 a E27
in PET con flessibile
20 cm in metallo

Lamp holder adapter
from E27 to E27 in PET with
20 cm metal flexible tube



ADATTATORE-EUC-UKG

8031414879809

Adattatore presa (EU) tipo C
a presa (UK) tipo G

Adaptor (EU) C to (UK) G



ADATTATORE-EUF-UKG

8031414879816

Adattatore (EU) F a (UK) G

Adaptor (EU) F to (UK) G



ADATTATORE-EU2-E27

8031414922796


Adattatore per
lampada d'emergenza

Emergency adapter



SMART INTEC

SMART HUB



SMART-GATEWAY-BT
8031414878970

Interfaccia di collegamento dispositivi bluetooth con rete WIFI


Device connection interface bluetooth with WIFI network





SMART PLUG



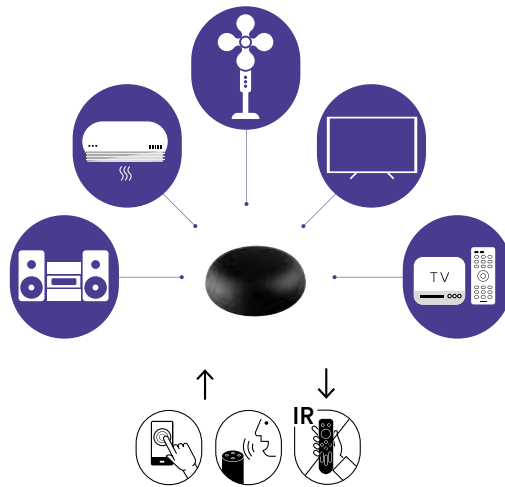


SMART-IR
8031414878703





SMART PLUG

WI-FI <small>SMART INTEC</small>		SMART-POWER-SC4USB3	8031414879014 Adattatore multipresa WIFI 4 Schuko 3 USB 1000-2400W 10A Input 100-240V WIFI 2.4GHZ	WIFI multi-socket adapter 4 Schuko 3 USB 1000-2400W 10A Input 100-240V 2.4GHZ WIFI
WI-FI <small>SMART INTEC</small>		SMART-PRESA	8031414878987 Adattatore presa WIFI 230V 50HZ 16A Frequenza 2.4GHz	WIFI socket adapter 230V 50HZ 16A 2.4GHz frequency

SMART CONTROLLER

WI-FI <small>SMART INTEC</small>		SMART-SWITCH-2	8031414879045 Controller WIFI 2.4GHZ per accensione e timer Interruttori 2 vie 230V max 10A	2.4GHZ WIFI Controller for ignition and timer 2-way switches 230V max 10A
WI-FI <small>SMART INTEC</small>		SMART-SWITCH-1	8031414879038 Controller WIFI 2.4GHZ per accensione e timer Interruttori 1 via 230V max 10A	2.4GHZ WIFI Controller for ignition and timer 1-way switches 230V max 10A
WI-FI <small>SMART INTEC</small>		SMART-START	8031414879021 Controller WIFI 2.4GHz per accensione e timer prodotti 230V max 2200W/10A	2.4GHZ WIFI Controller for ignition and timer products 230V max 2200W/10A

SMART SENSOR

WI-FI <small>SMART INTEC</small>		SMART-SENSOR	8031414879007 Sensore infrarossi WIFI 2.4GHz	Infrared sensor WIFI 2.4GHz
WI-FI <small>SMART INTEC</small>		SMART-PORTER	8031414878994 Sensore porte e finestre WIFI 2.4GHz alimentato a batterie AAA1,5V2	Sensor for door and windows WIFI 2.4ghz battery powered AAA1,5V2

INTEC[®]

LIGHT

faneurope

divisione F.A.N. EUROPE LIGHTING s.r.l. a socio unico

Agglomerato A.S.I

NAPOLI

Località Bosco Fangone
80035 Nola (NA)

T +39 081 3151017

T +39 081 8210771

info@faneurope.it
www.faneurope.it

MILANO

Via Monzoro, 46
20007 Cornaredo (MI)

T +39 02 84345083



Download Catalogue



SMART INTEC

Download App Smart Intec on:



concept
DITRE IDEAS MAKERS

graphic artwork & photo editing
Ditre.com

photo
Quasarfoto.com
Ditre.com
F.A.N. Europe photographic archive

imagebank
shutterstock.com
istockphoto.com
unsplash.com

styling
Cristina Romanello
Laila Casellato

credits
Infiniti Design
Pointhouse
Studio Menguante
Paolo Loschi
Gressoni
Vbc ceramiche

printed in Italy
Graficametalliana.com
April 2024

L'azienda si riserva il diritto di effettuare modifiche ai prodotti presenti in questo catalogo senza preavviso alcuno /

The company reserves the right to make changes to the products in this catalog without prior notice

faneurope[®]

